



Cordless Hammer Driver Drill
Cordless Driver Drill
Cordless Impact Driver

Satisfy Professional's Needs



Cordless Hammer Driver Drill
DHP482

Cordless Driver Drill
DDF482


Cordless Impact Driver
DTD152

Bits are option.

High Speed



DHP482
1,900 High Speed
 Predecessor model: 1,500

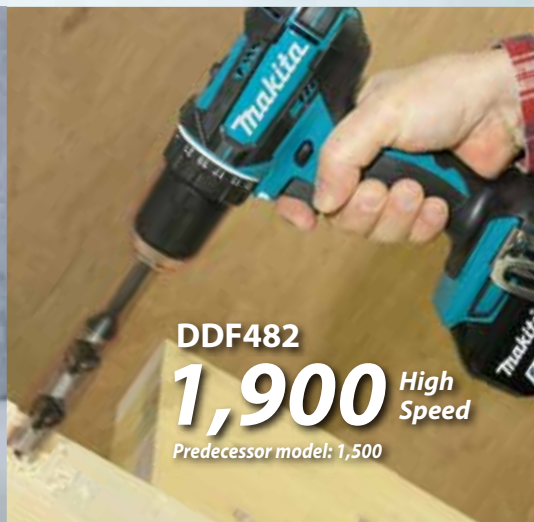

DDF482
1,900 High Speed
 Predecessor model: 1,500



DTD152
2,900 High Speed
 Predecessor model: 2,300

Compact overall length for increased maneuverability

← 198mm(7-3/4") DHP482 →



LED Job light with pre-glow functions

On pulling switch trigger, the light automatically turns on before motor starts turning.



Compact belt clip



For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced.



Battery

with Battery fuel gauge
BL1850B: 5.0Ah
BL1840B: 4.0Ah
BL1820B: 2.0Ah



BL1850B

BL1850: 5.0Ah
BL1840: 4.0Ah
BL1830: 3.0Ah
BL1820: 2.0Ah
BL1815N: 1.5Ah



BL1820B

Fast Charger DC18RC

Charging time 22min.



Charger DC18SD

Charging time 60min.



More Torque

DTD152: 165N•m

Predecessor model: 160N•m

DHP482/DDF482: 62N•m

Predecessor model: 50N•m (Hard Joint)

Ergonomically designed handle with soft grip



A In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened according to the U-shape formed between user's thumb and index finger.

B Rubberized soft grip provides comfortable grip and more control while minimizing hand fatigue and pain.

All metal gear construction

All metal gear construction for extra-high transmission durability
(DHP482, DDF482)



21 stages Torque Settings

(DHP482, DDF482)
Predecessor model: 16 stages



Cordless Hammer Driver Drill	DHP482 13mm (1/2")	440																				
Cordless Driver Drill	DDF482 13mm (1/2")	440																				
<ul style="list-style-type: none"> Variable Speed Brake Reversing Mechanical 2-Speed Keyless Chuck Torque Setting 21 Built-in Job Light Carrying Case 	<p>← 185mm(7-1/4") →</p> <p>DDF482</p>																					
	<table border="1"> <thead> <tr> <th></th> <th>DHP482</th> <th>DDF482</th> </tr> </thead> <tbody> <tr> <td>Capacity</td> <td>Steel: 13mm (1/2") Wood: 38mm (1-1/2") Masonry: 13mm (1/2")</td> <td>Steel: 13mm (1/2") Wood: 38mm (1-1/2") -</td> </tr> <tr> <td>Impacts per minute (ipm)</td> <td>Hi: 0-28,500 Lo: 0-9,000</td> <td>-</td> </tr> <tr> <td>No load speed (rpm)</td> <td>Hi: 0-1,900 Lo: 0-600</td> <td>Hi: 0-1,900 Lo: 0-600</td> </tr> <tr> <td>Max. fastening torque</td> <td>Hard / Soft: 62 / 36N.m</td> <td>Hard / Soft: 62 / 36N.m</td> </tr> <tr> <td>Dimensions (L x W x H)</td> <td>198x79x249mm (7-3/4"x3-1/8"x9-3/4")</td> <td>185x79x249mm (7-1/4"x3-1/8"x9-3/4")</td> </tr> <tr> <td>Net Weight*</td> <td>1.5kg (3.4lbs) with BL1815N 1.8kg (3.9lbs) with BL1850</td> <td>1.5kg (3.3lbs) with BL1815N 1.7kg (3.8lbs) with BL1850</td> </tr> </tbody> </table>		DHP482	DDF482	Capacity	Steel: 13mm (1/2") Wood: 38mm (1-1/2") Masonry: 13mm (1/2")	Steel: 13mm (1/2") Wood: 38mm (1-1/2") -	Impacts per minute (ipm)	Hi: 0-28,500 Lo: 0-9,000	-	No load speed (rpm)	Hi: 0-1,900 Lo: 0-600	Hi: 0-1,900 Lo: 0-600	Max. fastening torque	Hard / Soft: 62 / 36N.m	Hard / Soft: 62 / 36N.m	Dimensions (L x W x H)	198x79x249mm (7-3/4"x3-1/8"x9-3/4")	185x79x249mm (7-1/4"x3-1/8"x9-3/4")	Net Weight*	1.5kg (3.4lbs) with BL1815N 1.8kg (3.9lbs) with BL1850	1.5kg (3.3lbs) with BL1815N 1.7kg (3.8lbs) with BL1850
	DHP482	DDF482																				
Capacity	Steel: 13mm (1/2") Wood: 38mm (1-1/2") Masonry: 13mm (1/2")	Steel: 13mm (1/2") Wood: 38mm (1-1/2") -																				
Impacts per minute (ipm)	Hi: 0-28,500 Lo: 0-9,000	-																				
No load speed (rpm)	Hi: 0-1,900 Lo: 0-600	Hi: 0-1,900 Lo: 0-600																				
Max. fastening torque	Hard / Soft: 62 / 36N.m	Hard / Soft: 62 / 36N.m																				
Dimensions (L x W x H)	198x79x249mm (7-3/4"x3-1/8"x9-3/4")	185x79x249mm (7-1/4"x3-1/8"x9-3/4")																				
Net Weight*	1.5kg (3.4lbs) with BL1815N 1.8kg (3.9lbs) with BL1850	1.5kg (3.3lbs) with BL1815N 1.7kg (3.8lbs) with BL1850																				
Standard Equipment: Fast Charger, Battery Cartridge, (+) (-) Bit, Belt clip																						

Cordless Impact Driver	DTD152	448													
<ul style="list-style-type: none"> Variable Speed Brake Reversing Built-in Job Light Carrying Case 	<p>← 137mm (5-3/8") →</p>														
	<table border="1"> <thead> <tr> <th></th> <th>DTD152</th> </tr> </thead> <tbody> <tr> <td>Capacity</td> <td>Machine screw: M4 - M8 (5/32 - 5/16") Standard bolt: M5 - M16 (3/16 - 5/8") High tensile bolt: M5 - M12 (3/16 - 1/2") Coarse thread (in length): 22 - 125mm (7/8 - 4-7/8")</td> </tr> <tr> <td>Impacts per minute (ipm)</td> <td>0 - 3,500</td> </tr> <tr> <td>No load speed (rpm)</td> <td>0 - 2,900</td> </tr> <tr> <td>Max. fastening torque</td> <td>165N.m</td> </tr> <tr> <td>Dimensions (L x W x H)</td> <td>137x79x238mm (5-3/8"x3-1/8"x9-3/8")</td> </tr> <tr> <td>Net Weight*</td> <td>1.3kg (2.8lbs) with BL1815N 1.5kg (3.3lbs) with BL1850</td> </tr> </tbody> </table>		DTD152	Capacity	Machine screw: M4 - M8 (5/32 - 5/16") Standard bolt: M5 - M16 (3/16 - 5/8") High tensile bolt: M5 - M12 (3/16 - 1/2") Coarse thread (in length): 22 - 125mm (7/8 - 4-7/8")	Impacts per minute (ipm)	0 - 3,500	No load speed (rpm)	0 - 2,900	Max. fastening torque	165N.m	Dimensions (L x W x H)	137x79x238mm (5-3/8"x3-1/8"x9-3/8")	Net Weight*	1.3kg (2.8lbs) with BL1815N 1.5kg (3.3lbs) with BL1850
	DTD152														
Capacity	Machine screw: M4 - M8 (5/32 - 5/16") Standard bolt: M5 - M16 (3/16 - 5/8") High tensile bolt: M5 - M12 (3/16 - 1/2") Coarse thread (in length): 22 - 125mm (7/8 - 4-7/8")														
Impacts per minute (ipm)	0 - 3,500														
No load speed (rpm)	0 - 2,900														
Max. fastening torque	165N.m														
Dimensions (L x W x H)	137x79x238mm (5-3/8"x3-1/8"x9-3/8")														
Net Weight*	1.3kg (2.8lbs) with BL1815N 1.5kg (3.3lbs) with BL1850														
Standard Equipment: Fast Charger, Battery Cartridge, Belt clip															

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk, Bangalore - 560 067, INDIA. Tel: +91 80 2205 8200, Fax: +91 80 2854 9007
Email: sales@makita.in Website: www.makita.in