

SPECIFICATIONS

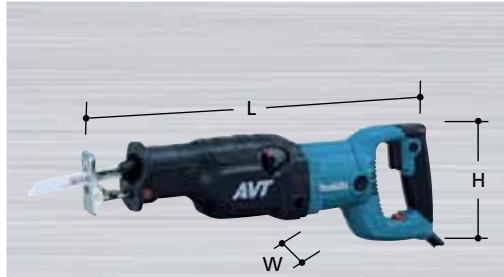


Photo: JR3070CT



	JR3070CT
Rating Amperage for North America	15 A
Continuous rating Input	1,510 W
Capacities (when 300 mm blade used)	in pipe : ϕ 130 mm (5-1/8") in wood : 255 mm (10")
Length of stroke	32 mm (1-1/4")
Strokes per min.	0-2,800
Orbital function	Yes
Speed control	Yes
Constant speed	Yes
AVT	Yes
Vibration	9 m / s ²
Dimensions (L x W x H)	485 mm x 99 mm x 181 mm (19-1/8" x 3-7/8" x 7-1/8")
Net weight	4.3 kg (9.5 lbs)
Power supply cord	2.5 m (8.2 ft.)
standard equipment	Recipro saw blade (3pcs.)

OPTIONAL ACCESSORIES

Recipro saw blade

A : Includes nail embedded wood.


Blade type	Teeth per inch	Overall length (mm)	application	Type	Pc. per pkg.	Part No
No.21	24	120	For steel plate 3 mm thick or less. For iron pipe 50 mm dia. or less.	-	5 2	792146-3 B-00804
No.22	18	160	For steel plate, aluminum sash more than 3 mm thick. For iron pipe 90 mm dia. or less.	-	5 2	792147-1 B-00810
No.23	9	160	Wood cutting under 90 mm.	A	5 2	792148-9 B-00826
No.23B	6	160	Wood cutting under 90 mm. For fast finish work.	-	5	792707-9
No.24	24	160	For steel plate 3 mm thick or less. For iron pipe 50 mm dia. or less.	-	5 2	792149-7 B-00832
No.3019	4	150	For roughing-in work in thick wood.	-	5	A-02303
No.3020	10	150	For wood, plywood. 5	A	5	A-02319
No.3022	6	150	For scroll cutting of plywood and other laminates.	-	5	A-02331
No.3023	10	250	For wood, plywood.	-	5	B-00767
No.3030	6	300	For roughing-in work in thick wood.	-	5	B-03030



Makita Power Tools India Pvt. Ltd,

Unit II, Sy. No.93/3 93/4, Koralur Village, Kasaba Hobli, Hoskote Taluk,
Bangalore 560 067, India Tel : +91 80 2205 8200 (6 lines) +91 80 2854 9008
Fax : +91 80 2854 9007 / 2205 8211 E-mail : sales@makita.in www.makita.in

Marketed By

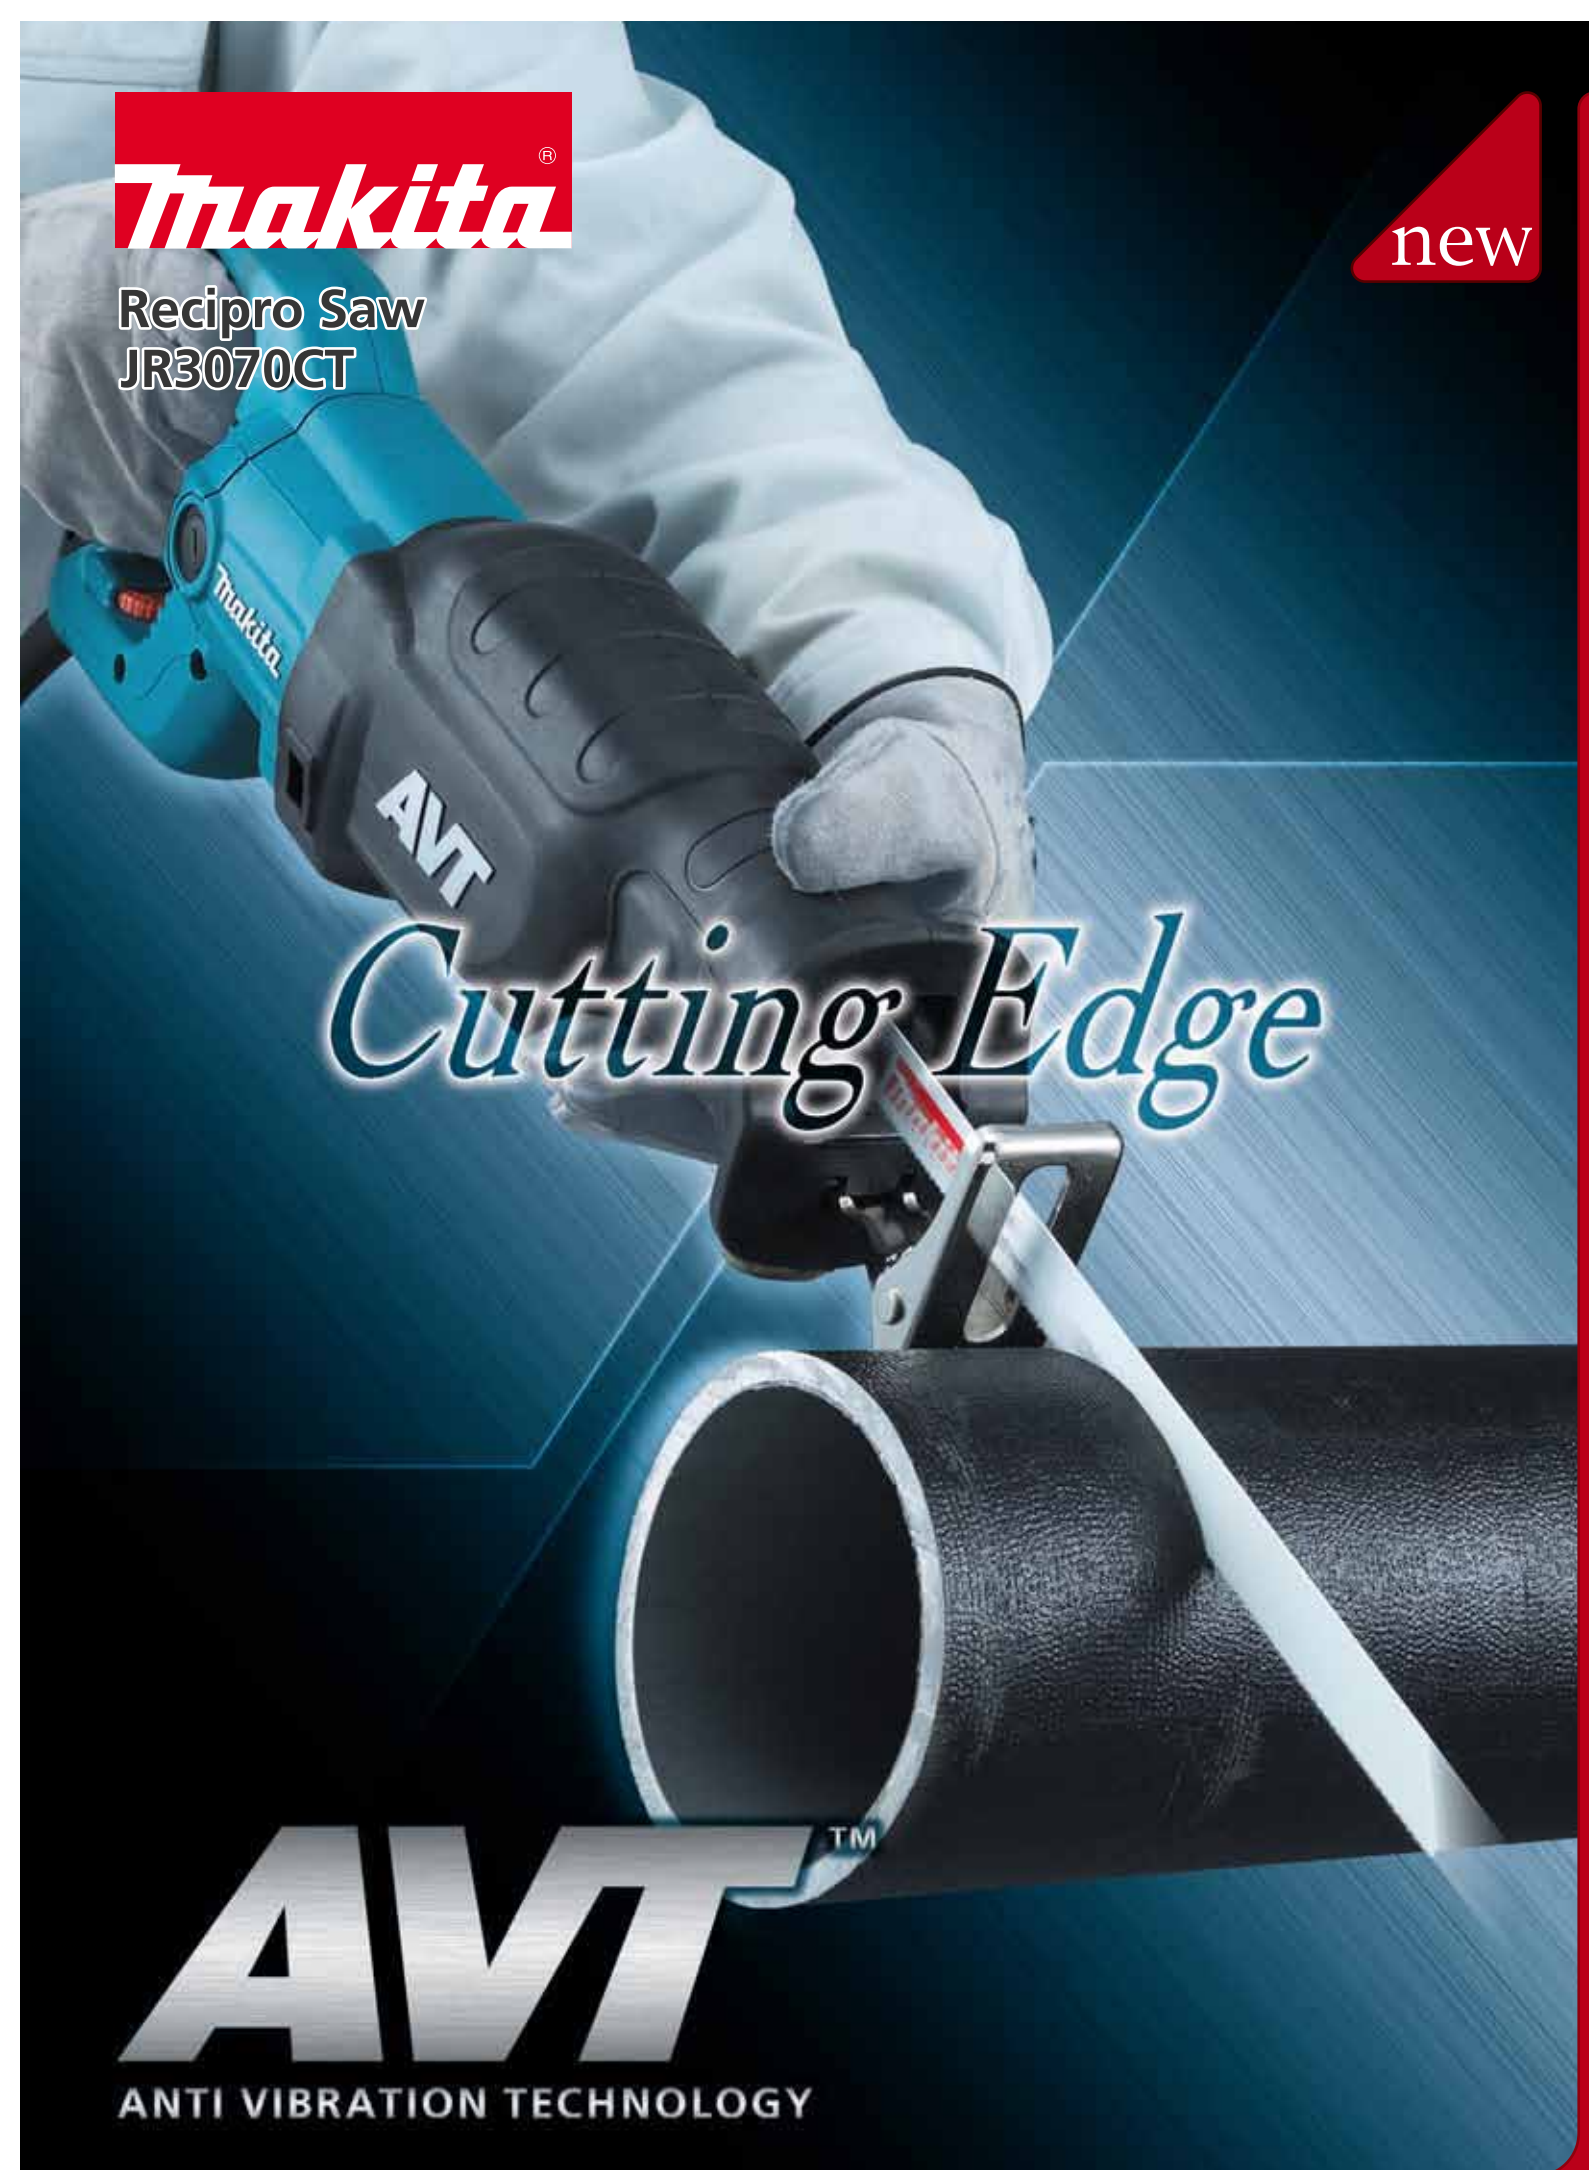

Recipro Saw
JR3070CT

new

Cutting Edge

AVTTM
ANTI VIBRATION TECHNOLOGY