



Battery Powered Backpack Blower UB004C Portable Power Pack PDC1500

Accessories

End nozzle 74 set

Part No. 1914H0-2

A nozzle suitable for blowing away wet fallen leaves or other heavy objects.



Flat nozzle set

Part No. 1914H1-0

A nozzle for blowing off fallen leaves adhering to the ground, etc.



Portable Power Pack

Portable Power Pack

High energy capacity of 1,500Wh PDC1500

Charger
DC4001
Charging time
PDC1500: 450 min.



Energy capacity of 1,200Wh PDC1200

Charger
DC4001
Charging time
PDC1200: 360 min.



XPT

High water-resistance allows to operate the machine even if it is wet with water.

Battery Powered

Blower
UB003C



Grass Trimmer
UR101C
UR201C
UR202C



Backpack Blower
UB004C



Lawn mower
LM001C



Adapter set

40Vmax

Part No.
191N62-4



Adapter between
Battery box of Portable
power pack and
Product on 40Vmax
XGT platform

18Vx2

Part No.
191J51-5



Adapter between
Battery box of Portable
power pack and
Product on 18Vx2 LXT
platform

Charging Time

DC4001



PDC1500



450
min

PDC1200



360
min

Battery Powered Backpack Blower

UB004C

	Variable Speed	Air volume	w/ PDC1500, Cruise control mode, Mode 1 / 2 / 3: 8.5 / 15.2 / 19.7 m ³ /min w/ PDC1500, Boost mode: 20.9 m ³ /min
	Anti-restart function	Max air velocity	w/ PDC1500, Cruise control mode, Mode 1 / 2 / 3: 33.2 / 59.0 / 76.3 m/s w/ PDC1500, Boost mode: 80.7 m/s
	Electronic 3-Speed	Blowing force	w/ PDC1500, Cruise control mode, Mode 1 / 2 / 3: 5 / 15 / 25 N w/ PDC1500, Boost mode: 28 N
	Constant Speed	No load speed	Cruise control mode, Mode 1 / 2 / 3: 10,500 / 18,000 / 22,500 min ⁻¹ Boost mode: 23,800 min ⁻¹
		Continuous use (Attachment) (Battery)	55-200 min Standard nozzle PDC1500
	Standard Equipment :	Vibration level	Operation w/o load, EN50636-2-100: 2.5 m/s ² or less
	End nozzle, Flat nozzle,	Vibration K factor	Operation w/o load, EN50636-2-100: 1.5 m/s ²
	Pipe support belt	Sound pressure level	EN50636-2-100: 82.3 dB(A)
	complete, Pipe belt	Sound power level	EN50636-2-100: 96.1 dB(A)
	complete	Noise K factor	3.1, 2.1 dB(A)
		Dimensions (L x W x H)	460 x 575 x 585 mm (18-1/8 x 22-5/8 x 23")
		Net weight	16.5 - 18.6 kg (36.4 - 41.0 lbs.)
		(Battery)	PDC1200 - PDC1500

Portable Power Pack

PDC1500

Capacity	43.55 Ah
Energy capacity	1,567.8 Wh
Number of cells	130
Charging time	450 min.
Dimensions (L x W x H)	w/o Harness: 369 x 312 x 131 mm (14-1/2 x 12-1/4 x 5-1/8")
Net weight	Battery only: 10.9 kg (24.0 lbs.)* Harness assembly: 12.9 kg (28.4 lbs.)*
Power supply cord	Battery side: 1.2 m (3.9 ft) Adapter side: 0.6 m (2.0 ft)

*not covered by EPTA-Procedure

Standard Equipment : Harness, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.


Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan



PRINTED IN JAPAN 202404

www.makita.com

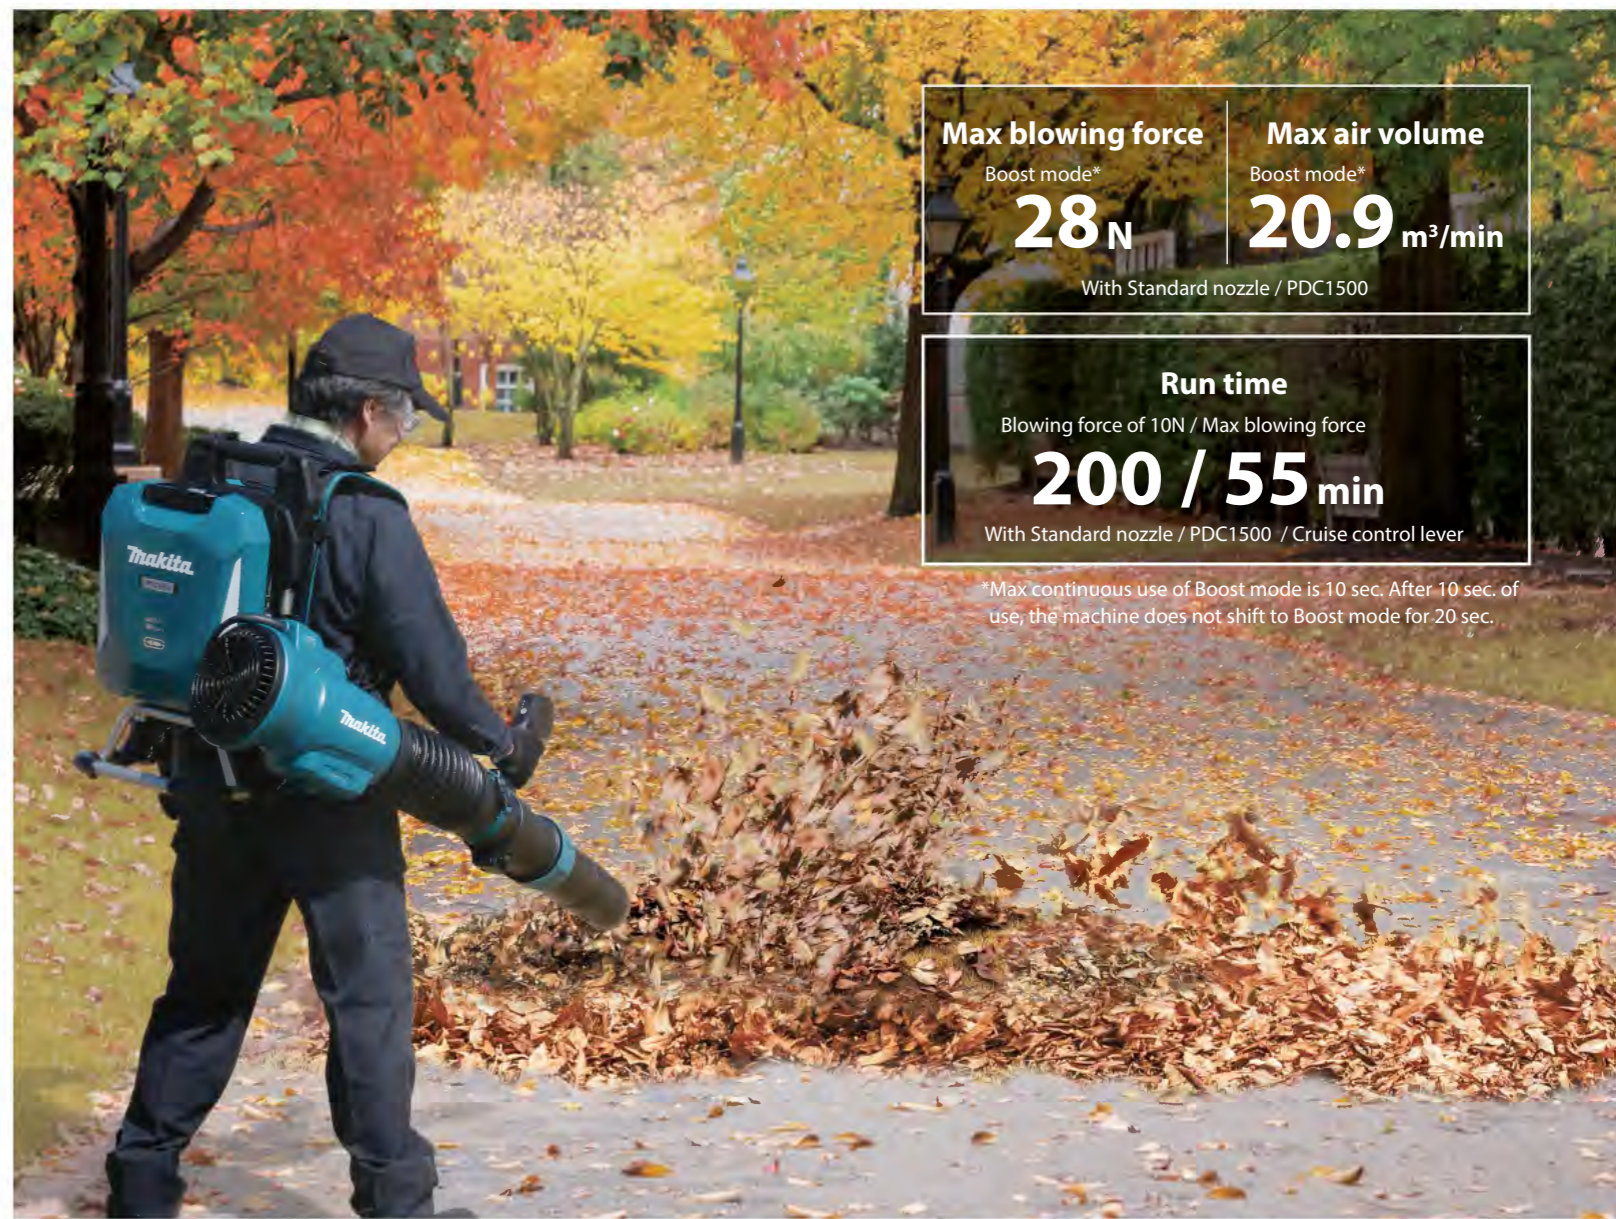

Max blowing force

Boost mode*

28_N

With Standard nozzle / PDC1500

Max air volume

Boost mode*

20.9 m³/min

Run time

Blowing force of 10N / Max blowing force

200 / 55 min

With Standard nozzle / PDC1500 / Cruise control lever

*Max continuous use of Boost mode is 10 sec. After 10 sec. of use, the machine does not shift to Boost mode for 20 sec.

With End nozzle 74



With Flat nozzle





High blowing force of 25N and Max blowing force of 28N in Boost mode (with a time limit)



High power

The airflow path from Fan has been changed from a curved line in Predecessor model to a straight line, increasing blowing efficiency by approx 10%.



Max blowing force
Boost mode*

28 N

Max air volume
Boost mode*

20.9 m³/min

Max air velocity
Boost mode*

80.7 m/s

With Standard nozzle / PDC1500

*Max continuous use of Boost mode is 10 sec. After 10 sec. of use, the machine does not shift to Boost mode for 20 sec.



Connector

High blower performance similar to 65 cm³ class engine backpack blower

1,500Wh high capacity

Portable Power Pack
PDC1500

Quick removal/attachment

allows for the battery to be easily removed or attached to the main unit.



Reflectors

keep operator visible from a distance even in the dark.



4-LED fuel gauge

indicates the battery status by four green LEDs.



XPT

eXtreme Protection Technology / IPX4 compatible

High water-resistance allows to operate the machine even if it is wet with water.



Three speed mode button



Battery fuel gauge

Three green LEDs



Telescopic nozzle structure

stepless adjustment



with PDC1500

UB004C without battery

Improvements for more comfortable backpacking experience

Redesigned backpack harness section for more comfortable backpacking experience

- Mesh fabric for belts for improved breathability
- Shoulder belt material and shape have been redesigned to reduce the stress on user's shoulders



Variable speed control by trigger + Cruise control lever

- Trigger can be fixed at a desired position by user.
- The machine can shift to Boost mode by pulling Trigger fully from the position where Trigger stops in the halfway position.



Position-adjustable grip

The grip position is adjustable forward/backward and left/right to suit user's size or work posture.

