



# Cordless Pole Saw DUA200

## Easy pruning of high branches



**With three-stage pipe**

Reaches branches up to	Lightweight
about <b>3,500 mm*</b>	<b>3.5 kg**</b>

**With two-stage pipe**

Reaches branches up to	Lightweight
about <b>2,500 mm*</b>	<b>2.9 kg**</b>



### Accessories

Guide bar 8 set				Saw chain 8 set						Guide bar case 210	Sprocket 7 set	
Bar length	Motor Mount	Type	Part No.	No. of drive links	gauge	pitch	Type OREGON	Cutter type	Part No.	Part No.	Type	Part No.
20 cm/8"	A041	Sprocket nose bar	1914S3-3	38	1.1 mm / .043"	.325"LP	80TXL	MC	1914S1-7	413G28-5	Sprocket .325"LP	1911W5-9

**Band assembly**  
Part No. 122D94-0

**Chain edger set**  
Part No. 1914A1-1  
File size: 4 mm

**Oil vessel set**  
Part No. 199897-3  
Chain oil 100 mL

### Charging Time

Battery Model	Fast Charging	
	DC18RC	DC18SD
BL1815N 1.5Ah	15 min	30 min
BL1820B 2.0Ah	24 min	45 min
BL1830B 3.0Ah	22 min	60 min
BL1840B 4.0Ah	36 min	90 min
BL1850B 5.0Ah	45 min	110 min
BL1860B 6.0Ah	55 min	130 min

### Cordless Pole Saw

#### DUA200

Brake	Guide bar length	200 mm (8")
Automatic Oiling	Chain speed	6.7 m/s
Toolless blade change	Saw chain	Type: 80TXL, Pitch: 0.325", Gauge: 1.1 mm (0.043")
	Oil tank capacity	55 mL (1.9 oz.)
	Sound pressure level	77 dB(A)
	Sound power level	86 dB(A)
	Noise K factor	3 dB(A)
	Vibration level	Cutting wood: 2.5 m/s <sup>2</sup> or less
	Vibration K factor	Cutting wood: 1.5 m/s <sup>2</sup>
	Dimensions (L x W x H)	w/o Guide bar: 1,620 / 2,520 x 85 x 134 mm (63-3/4 / 99 x 3-3/8 x 5-1/4")
	Length from the rear end of Trigger to the Tool tip	w/o Guide bar: 1,460 - 2,360 mm (57-1/2 - 93")
	Net weight	3.2 - 3.5 kg (7.1 - 7.7 lbs.)
	Net weight (Battery)	BL1815N - BL1860B
	Net weight (Attachment)	Guide bar, Saw chain, Chain oil

Standard Equipment : Chain oil, Band assembly, Guide bar case, Saw chain, Guide bar, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.  
Items of standard equipment and specifications may vary by country or area.



**Makita Power Tools India Pvt. Ltd.**  
Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk,  
Bangalore - 560 067 | Tel: +91-80-2205-8200  
Email: info@makita.in Website: www.makita.in



# With the lightweight head section, the tool ensures high work efficiency and easy pruning of high branches.




## Head angle adjustment

- The angle of the tool head is adjustable in 9 stages between 60° upwards and 60° downwards.
- The angle adjustment can be locked/unlocked with one touch.




**BL**  
MOTOR

## High Power Brushless Motor



## Automatic chain lubrication



## Tool-less chain adjustment



Automatic chain tension adjustment by simply loosening and retightening the lever

## Slim tool head



The slim shape of the tool head allows for easy insertion between branches.

## Branch hook



Hook for pulling and dropping branches that have been caught

Lock-off buttons on both left and right sides



Battery guard

## With three-stage pipe

Reaches branches up to about **3,500 mm\***  
Tool length: 2,500 mm

Lightweight  
**3.5 kg\*\***

\* Height to the underside of Saw chain  
\*\*w/ Battery BL1860B, Guide bar and Saw chain

## With two-stage pipe

Reaches branches up to about **2,500 mm\***  
Tool length: 1,300 mm

Lightweight  
**2.9 kg\*\***

\* Height to the underside of Saw chain  
\*\*w/ Battery BL1860B, Guide bar and Saw chain


**XPT**  
eXtreme Protection Technology

## Cutting work amount

Work volume on a single full battery charge

About **600** cuts

- 50 mm cedar square timber
- saw chain : 80TXL
- Battery : BL1860B

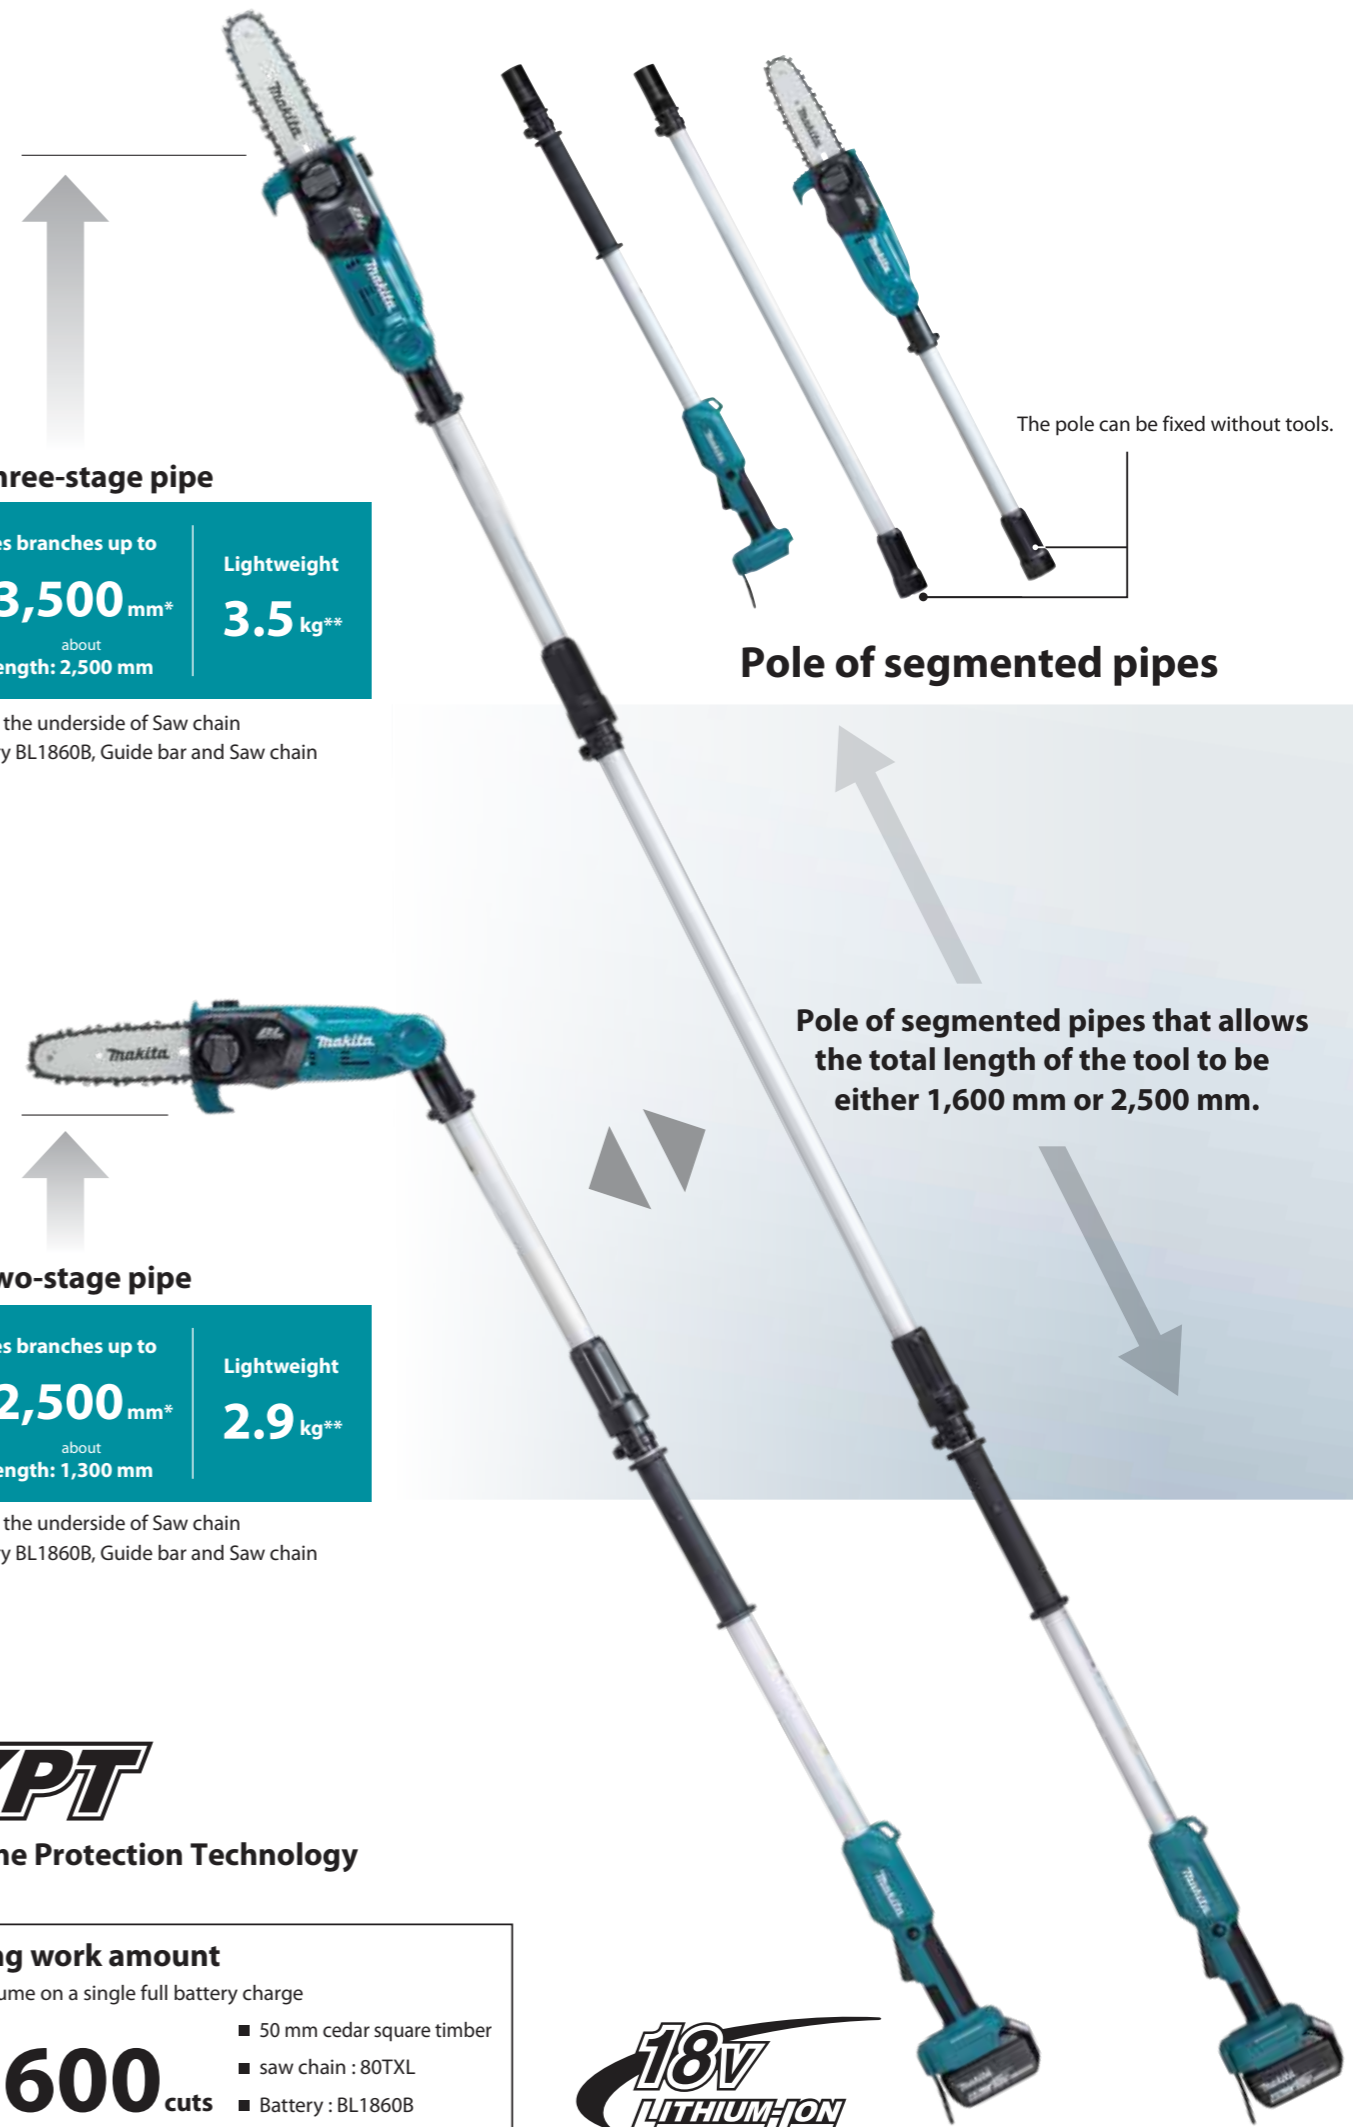

**18V**  
LITHIUM-ION