

**Accessories**

**Dust cup set**

A dust collection attachment to be attached to the tip of the tool and used in conjunction with a vacuum cleaner.

For drilling work

HR2670: Part No. 1914L7-6  
HR2670FT: Part No. 1914L8-4



For chiseling work

HR2670: Part No. 1914L9-2  
HR2670FT: Part No. 1914M0-7



**Dust extraction pad set**

Part No. 1914X3-8

Sticking the pad to the wall with the suction power of Vacuum cleaner enables drilling into concrete while collecting dust.



**Tool holder set**

HR2670FT: Part No. 191F47-2



**Drill chuck set**

HR2670FT: Part No. 191F46-4



**Chuck adapter (SDS-PLUS)**

Part No. D-14093 / D-14087



**Drill chuck set**

Part No. 194041-7



**Grease vessel set**

Part No. 194683-7  
198993-4 Part No. 194683-7  
Hammer bit grease



**Combination Hammer**

**HR2670 / HR2670FT 26 mm (1") 3.0 J Combination Hammer, SDS-PLUS**

- Double Insulation
- Variable Speed
- Reversing
- Torque Limiter
- Built-in Job Light (HR2670FT only)
- Adapted for SDS-PLUS bits
- Carrying Case

	HR2670	HR2670FT
Impacts per minute	0-4,500 min <sup>-1</sup>	0-4,500 min <sup>-1</sup>
No load speed	0-1,500 min <sup>-1</sup>	0-1,500 min <sup>-1</sup>
Continuous rating input	800 W	800 W
Capacity	Concrete (w/ TCT bit): 26 mm (1") Concrete (w/ Core bit): 68 mm (2-11/16") Concrete (w/ Diamond core bit): 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")	Concrete (w/ TCT bit): 26 mm (1") Concrete (w/ Core bit): 68 mm (2-11/16") Concrete (w/ Diamond core bit): 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Impact energy	3.0 J	3.0 J
Vibration level (EN62841-2-6)	Hammer drilling into concrete: 16.1 m/s <sup>2</sup> Chiselling: 14.2 m/s <sup>2</sup>	Hammer drilling into concrete: 15.7 m/s <sup>2</sup> Chiselling: 14.0 m/s <sup>2</sup>
Vibration K factor (EN62841-2-6)	Hammer drilling into concrete: 1.5 m/s <sup>2</sup> Chiselling: 1.5 m/s <sup>2</sup>	Hammer drilling into concrete: 1.5 m/s <sup>2</sup> Chiselling: 1.5 m/s <sup>2</sup>
Sound pressure level (EN62841-2-6)	94 dB(A)	94 dB(A)
Sound power level (EN62841-2-6)	102 dB(A)	102 dB(A)
Noise K factor (EN62841-2-6)	3 dB(A)	3 dB(A)
Dimensions (L x W x H)	362 x 77 x 207 mm (14-1/4 x 3 x 8-1/8")	390 x 77 x 207 mm (15-3/8 x 3 x 8-1/8")
Net weight	2.9 - 3.4 kg (6.4 - 7.5 lbs.)	3.1 - 3.3 kg (6.8 - 7.3 lbs.)

**Standard Equipment :** HR2670: Side grip, Depth gauge, Dust cup assembly  
HR2670FT: Side grip, Depth gauge, Drill chuck assembly

*The weight may differ depending on the attachment(s), including the battery cartridge.  
Items of standard equipment and specifications may vary by country or area.*



**Combination Hammer  
HR2670 / HR2670FT**

26 mm (1") Adapted for SDS-PLUS bits



**Powerful 800 W motor delivers  
3.0 J of impact energy  
to handle the most demanding applications**

photo: HR2670

**HR2670**  
Normal chuck



**HR2670FT**  
Quick change chuck  
with LED job light



**Makita Power Tools India Pvt. Ltd.**

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk,  
Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007  
Email: sales@makita.in Website: www.makita.in

# Superior Power and Durability


By redesigning the internal structure and optimizing the motor specifications, we have achieved increased power and durability, ensuring superior performance.

Impact energy  
**3.0 J**

## Drilling efficiency

Drilled holes downward into concrete with compressive strength of 40N/mm<sup>2</sup> to a depth of 60mm (2-3/8") at a pressing load of 8kg using a two-flute bit

HR2670 ø16.0mm	<b>125</b>
HR2670 ø10.5mm	<b>105</b>
predecessor model	100

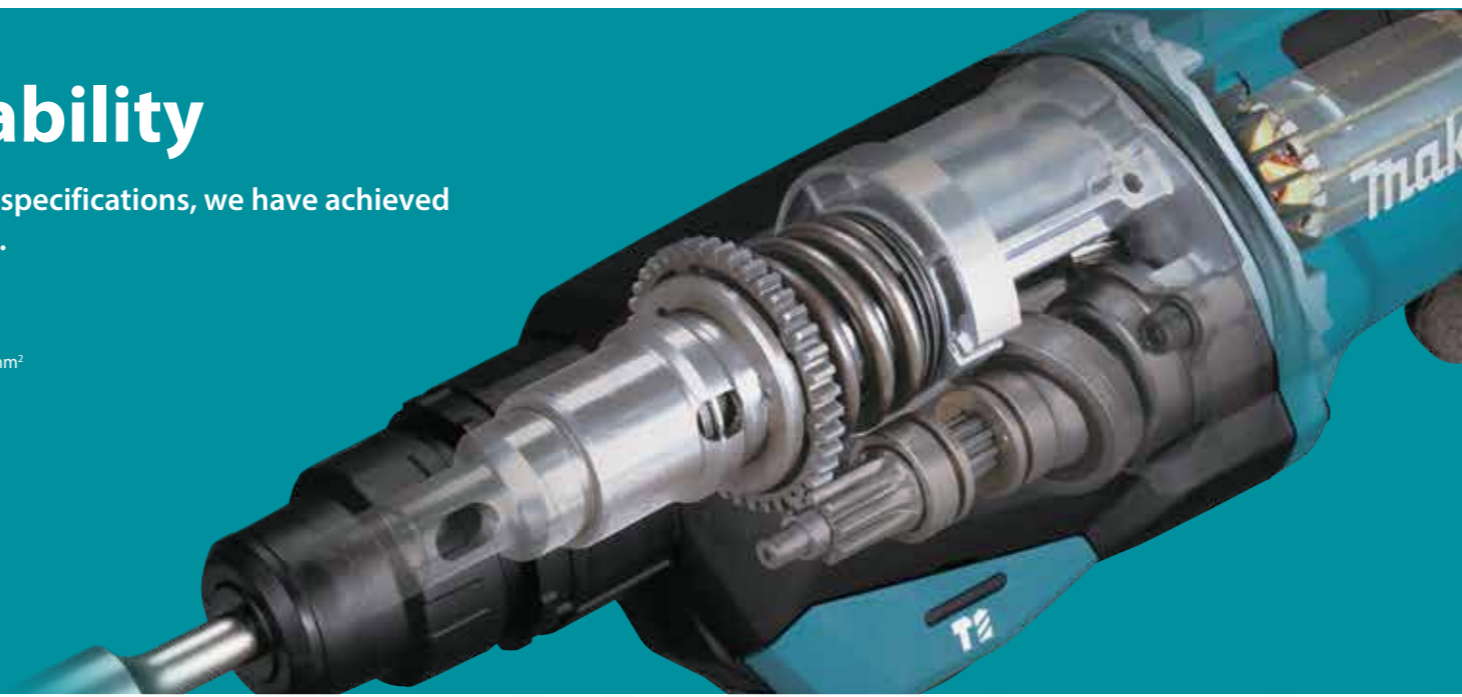

Hammer drilling using the rotation with hammering mode  
photo: HR2670



Chiselling with the hammering mode  
photo: HR2670

## Dust cup (Optional accessory)

- Compact and highly visible dust cup
- The bellows for drilling and for chiseling can be exchanged with one touch.

### Bellows for drilling



### Attachment



HR2670

HR2670FT

### Bellows for chiseling



## Compact



## Reverse switch using Brush holder unit

The same speed and torque even in the reverse rotation



## Variable speed control by trigger

## Lock-on button

## One-touch sliding chuck

## Quick change drill chuck

(HR2670FT only)



photo: HR2670

## Three operation modes

Rotation only / Rotation with hammering / Hammering only



## LED job light

(HR2670FT only)



Adapted for SDS-PLUS bits

