




18V X2 Lithium-ion Garden Tools



Makita specific: "36V" powered by two 18V Li-ion batteries in series

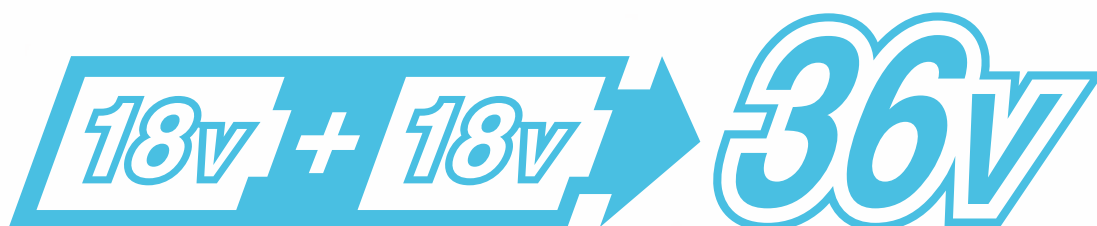

18V X2 = 36V BATTERY SYSTEM



18V X2 = 36V Garden Tools!



for the people and the planet...

Makita specific: "36V" powered by two 18V Li-ion batteries in series



Expand Your
LithiumLine Up





**Powerful as if you were
using engine or AC tools.**




Cordless Grass Trimmer

DUR365U / DUR366L

BL XPT
MOTOR EXTREME PROTECTION TECHNOLOGY

High power and more work

Outer Rotor Brushless Motor direct-drive

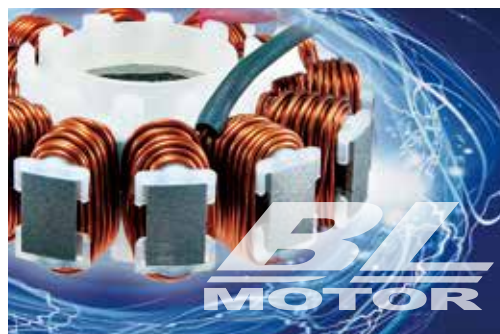

Reverse switch for easy removal of clogging grass/weed clippings

Clogging clippings... can be removed!



	DUR365U	DUR366L
Cutting Width	Metal Blade: 230 mm (9") Trimmer Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")	Trimmer Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Medium / Low: 6,500 / 5,300 / 3,500	High / Low: 6,500 / 5,000
Spindle Size	M10 x 1.25 LH	M10 x 1.25 LH
Sound Pressure Level	Metal Blade: 75 dB(A)	—
Sound Power Level	Metal Blade: 86 dB(A)	—
Sound Pressure Level	Plastic Blade: 83 dB(A)	Plastic Blade: 83 dB(A)
Sound Power Level	Plastic Blade: 92.8 dB(A)	Plastic Blade: 92 dB(A)
Sound Pressure Level	Nylon Cutting Head: 77 dB(A)	Nylon Cutting Head: 81 dB(A)
Sound Power Level	Nylon Cutting Head: 90 dB(A)	Nylon Cutting Head: 89 dB(A)
Vibration Level	Left / Right: 2.5 / 2.5 m/s ² or less	Front / Rear: 2.5 / 2.5 m/s ² or less
Dimensions (L x W x H)	1,754x610x460mm (69"x24"x18-1/8")	1,754x310x229mm (69"x12-1/4"x9")
Max Run Time (min)	with BL1850B: 490	with BL1850B: 100
Net weight	4.7 kg (10.5 lbs)	4.0 kg (8.8 lbs)

Standard Equipment: Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger



Cordless Lawn Mower

DLM431 430 mm (17") / DLM380 380 mm (15")

High maneuverability and environment-friendly

XPT
EXTREME PROTECTION TECHNOLOGY



	DLM431 430 mm (17")	DLM380 380 mm (15")
Blade Type	2 Tooth, Rotary Type	2 Tooth, Rotary Type
Cutting Width	430 mm (17")	380 mm (15")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")	25 - 75 mm (1" - 2-15/16")
Grass box capacity	50L	40L
No Load Speed (RPM)	3,600	3,700
Recommended mowing area	with BL1850B x2: 475 - 950 m ²	with BL1830B x2: 270 - 540 m ²
Continuous Use (min.)	with BL1850B x2: 30	with BL1830B x2: 17
Wheel Size	Front / Rear: 140 / 160 mm (5-1/2" / 6-5/16")	Front / Rear: 140 / 190 mm (5-1/2" / 7-1/2")
Sound Pressure Level	80 dB(A)	81 dB(A)
Sound Power Level	93 dB(A)	93 dB(A)
Vibration Level	2.5 m/s ² or less	2.5 m/s ² or less
Dimensions (L x W x H)	1,450-1,490x460x950-1,020mm (57-58-3/4"x18-1/8"x37-1/2"-40-1/4")	1,145x465x1,023-1,070mm (45"x18-1/4"x40-1/4"-42")
Net weight	17.8 kg (39.3 lbs)	14.5 kg (32.0 lbs)

Standard Equipment: Blade, Socket Wrench (DLM431), Wrench, Charger, Battery



Reversing Brake Constant Speed Electronic 3-Speed Electronic 2-Speed Soft Start

Cordless Chain Saw

DUC353 350 mm (14") / **DUC303** 300 mm (12")

BL MOTOR **XPT**
EXTREME PROTECTION TECHNOLOGY

High Power & High Speed Chain

- Efficiency equivalent to 30mL class engine chain saw
- Outer Rotor Brushless Motor direct-drive

High operability

Chain brake and Variable speed trigger switch provide high operability equivalent to engine chain saw.

Front-hand-guard-activated chain brake

Variable speed trigger switch

Outer Rotor Brushless Motor direct-drive



Tool-less saw chain tension adjustment

Extendable lever provides higher tightening torque.

Dial for easier adjustment of saw chain tension



Battery capacity warning lamp



Metal spike bar



Metal chain catcher



Chain oil level window



Adjusting the chain lubrication

	DUC353 350 mm (14")	DUC303 300 mm (12")
Chain Pitch	3/8"	3/8"
Chain Gauge	1.1 / 1.3 mm (0.043" / 0.050")	1.1 / 1.3 mm (0.043" / 0.050")
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume	200 mL	200 mL
Sound Pressure Level	87.7 dB(A)	87.7 dB(A)
Sound Power Level	100.4 dB(A)	100.4 dB(A)
Vibration Level	Cutting Wood: 5.3 m/s ²	Cutting Wood: 5.3 m/s ²
Dimensions (L x W x H)	773x215x235 mm (30-1/2"x8-1/2"x9-1/4")	723x215x235mm (28-1/2"x8-1/2"x9-1/4")
Net weight	4.7 kg (10.4 lbs)	4.6 kg (10.2 lbs)

Standard Equipment : Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Battery, Charger



DUC302 300 mm (12") / **DUC252** 250 mm (10")

Low noise level at only 84.4dB(A) and zero emissions for operator comfort



Tool-less saw chain tension adjustment

Dial for easier adjustment of saw chain tension



Extendable lever provides higher tightening torque.



Adjusting the chain lubrication



Retractable metal hook



	DUC302 300 mm (12")	442	DUC252 250 mm (10")	442
Chain Pitch	3/8"		3/8"	
Chain Gauge	1.1 mm (0.043")		1.3 mm (0.05")	
Chain Speed	8.3 m/s (500 m/min) (1,650 FPM)		8.3 m/s (500 m/min) (1,650 FPM)	
Chain Oil Tank Volume	85 mL (2.9 US oz)		85 mL (2.9 US oz)	
Sound Pressure Level	84.4 dB(A)		84.4 dB(A)	
Sound Power Level	95.4 dB(A)		95.4 dB(A)	
Vibration Level	Cutting Wood: 6.3 m/s ²		Cutting Wood: 4.7 m/s ²	
Dimensions (L x W x H)	600x234x198mm (23-5/8"x9-1/4"x7-3/4")		545x234x198mm (21-1/2"x9-1/4"x7-3/4")	
Net weight	4.1 kg (9.0 lbs)		4.1 kg (9.0 lbs)	

Standard Equipment : Saw Chain, Guide Bar, Guide Bar Cover, Spike Bumper, Battery, Charger



Battery Powered Pruning Shears

DUP361

BL XPT
MOTOR EXTREME PROTECTION TECHNOLOGY

Smooth cutting similar to that of a hand pruner

- Blade can be interlocked with the trigger, providing smooth blade movement similar to that of a hand pruner.



High cutting performance

Able to cut more vine branches than the competitors.

Ergonomically designed handle with soft grip




Slim body

- highly maneuverable for use even in tight spaces
- With a finger guard

Provided that Ø15mm grapevines are cut:

71,000
(with two BL1850)

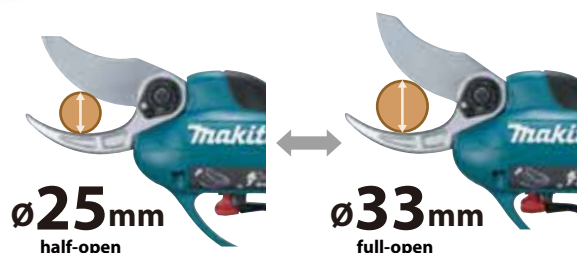

	DUP361
Max Output	200 W
Capacity	Max cutting : 33mm Max blade opening: 54mm
Sound Pressure Level	70 dB(A) or less
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	305x43x106mm (12"x1-11/16"x4-3/16")
Net weight	3.3kg (7.2lbs)

Standard Equipment: Oil supply (country-specific), Wrench set, Diamond File, Cord Holder, Holster, Harness, Arm Band, Tool bag, Battery, Charger, Shear Blade

Cordless Hedge Trimmer

DUH651 650 mm (21-1/2") / DUH551 550 mm (21-5/8")

Low noise level


Extremely low noise emission compared with our 21mL petrol-powered machine, and almost the same as our AC machine.



XPT
EXTREME PROTECTION TECHNOLOGY

Maximum branch diameter

Indicates maximum diameter of the branch that can be received between adjacent two blade teeth.



5 position rotating rear handle

High-performance trimming



	DUH651 650mm (25-1/2")	442	DUH551 550mm (21-5/8")	442
Blade Length	650mm (25-1/2")		550mm (21-5/8")	
Strokes Per Minute (SPM)	2,000-3,600		2,000-3,600	
Sound Pressure Level	82 dB(A)		81.5 dB(A)	
Sound Power Level	91.1 dB(A)		91 dB(A)	
Dimensions (L x W x H)	1,135x225x200mm (44-3/4"x8-7/8"x7-7/8")		1,065x225x200mm (42"x8-7/8"x7-7/8")	
Max Output	0.32kW		0.32kW	
Net weight	4.7kg (10.3lbs)		4.6kg (10.2lbs)	

Standard Equipment: Charger, Battery, Blade Cover




Cordless Blower

DUB362 / DU361



Powerful 13.4m³/min, lightweight 3.5kg and very low noise level 93.5dB blower

(DUB362)

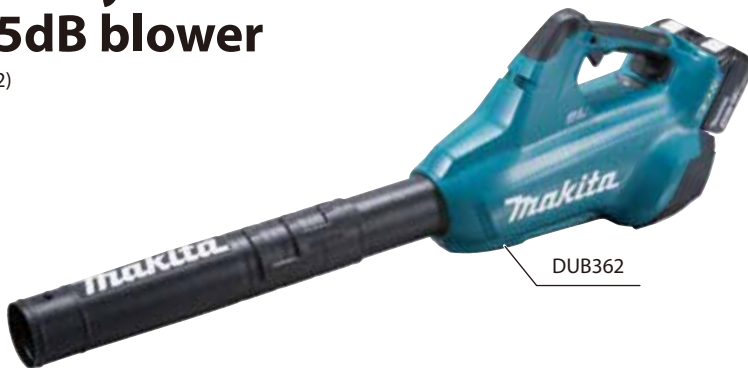

DUB362




DU361

DUB362

Reduced noise level

Makita DUB362 features:

- 3-blade fan to reduce noise level without losing air volume and velocity
- Double housing structure to minimize the noise level
- Additional sponge inside the housing to absorb the noise level

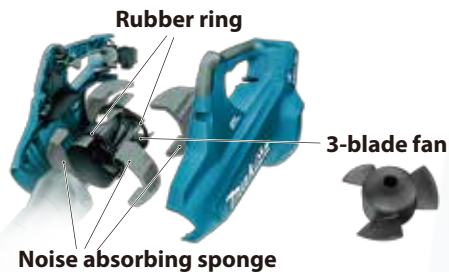

3-stage telescopic long nozzle with an adjustment range of 100mm (4")



6-stage air volume/velocity selection just by adjusting dial.



DUB362



DU361

	DUB362	DU361	430
Max Air Volume	13.4 m³/min (473 CFM)	High: 4.4 m³/min (155 CFM) Low: 2.6 m³/min (92 CFM)	
Max Air Velocity	54 m/s (120 MPH)	High: 93 m/s (208 MPH) Low: 57 m/s (128 MPH)	
No Load Speed (RPM)	11,400 - 21,500	High: 17,000 / Low: 10,000	
Sound Pressure Level	79.1 dB(A)	82.3 dB(A)	
Sound Power Level	93.5 dB(A)	94.7 dB(A)	
Vibration Level	2.5 m/s² or less	2.5 m/s² or less	
Dimensions (L x W x H)	830/880/930x205x295mm (32-3/4/34-3/4/36-5/8"x8-1/8"x11-5/8")	905x141x194mm (35-5/8"x5-5/8"x7-5/8")	
Net weight	3.5 kg (7.7 lbs)	2.6 kg (5.9 lbs)	

Standard Equipment: Shoulder Belt, Nozzle, Battery, Charger

DUB362



DU361

Battery Powered Wheelbarrow

DCU180



Hauls all kinds of heavy loads with optional heavy duty carrier and bucket



	DCU180
Max Run Time (min)	with BL1860B: 120
Max Load Capacity	130 kg (290 lbs.)
Traveling Speed	Forward, High / Low: 0 - 3.5 / 0 - 1.5 km/h Reverse: 0 - 1 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	When carrier is installed / During operation: 1,310x1,060x900 mm (51-1/2"x41-3/4"x35-1/2")
Net weight	Pipe frame type: 44.5-44.8 kg (98.7-98.0 lbs) / Bucket type: 39.3-39.6 kg (87.2-86.5 lbs) Machine only: 32.2-32.5 kg (71.7-71.0 lbs)

Standard Equipment: Lock Key, Support Legs, Wrenches



Variable Speed



Constant Speed



Soft Start



Electronic 2-Speed



Reversing



Built-in Job Light

18V

Lithium-ion

LXT

18v + 18v → 36v

18v LITHIUM-ION

36v LITHIUM-ION

Expand Your Lithium Line Up
Product availability and specifications may vary by country or area.

Users, who have 2 units of 18V battery can make use of 36V cordless tools.

Li-ion Battery & Charging Time Reference, Compatibility Chart

		Fast Charger DC18RC 	Four Port Multi Charger DC18SF 	Charger DC18SD DC18SE (Automotive)
6.0 Ah	 BL1860B (197422-4) with Battery fuel gauge	55 min.	130min. 1 to 2 batteries 260min. 3 to 4 batteries	130 min.
5.0 Ah	 BL1850B (197282-4) with Battery fuel gauge	45 min.	110min. 1 to 2 batteries 220min. 3 to 4 batteries	110 min.
4.0 Ah	 BL1840B (197267-0) with Battery fuel gauge	36 min.	90min. 1 to 2 batteries 180min. 3 to 4 batteries	90 min.
3.0 Ah	 BL1830B (197599-5) with Battery fuel gauge	22 min.	60min. 1 to 2 batteries 120min. 3 to 4 batteries	60 min.
2.0 Ah	 BL1820B (197256-5) with Battery fuel gauge	24 min.	45min. 1 to 2 batteries 90min. 3 to 4 batteries	45 min.
1.5 Ah	 BL1815N (196449-1)	15 min.	30min. 1 to 2 batteries 60min. 3 to 4 batteries	30 min.

Battery Converter BCV01 (option)



Battery Converter BCV03 (option)



MAKPAC Power source kit

Carry-able as one package



For start up modes without battery and charger set contents are Battery charger and Batteries

ex. MKP3PT183
=DC18RD
+BL1850 (4)
+MAKPAC

*Contents:
Lots of versions are provided

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201708