



Cordless Impact Driver

Satisfy Professional's Needs



Cordless Impact Driver

DTD152

High Speed



DTD152

2,900 High Speed

Predecessor model: 2,300

# Compact overall length for increased maneuverability

← 198mm (7-3/4") →



LED Job light with pre-glow functions  
On pulling switch trigger, the light automatically turns on before motor starts turning.



Compact belt clip

**XPT**  
EXTREME PROTECTION TECHNOLOGY

For use in outdoor applications in harsh environments, protection from dust and dripping water is enhanced.

**18V**  
LITHIUM-ION

## Battery

XU#BLUFSZG/RV#B/M/F  
BL1850B: 5.0Ah  
BL1840B: 4.0Ah  
BL1820B: 2.0Ah



BL1850B

BL1850: 5.0Ah  
BL1840: 4.0Ah  
BL1830: 3.0Ah  
BL1820: 2.0Ah  
BL1815N: 1.5Ah



BL1820B

Fast Charger  
DC18RC

Charging time 22min.



Charger  
DC18SD

Charging time 60min.




## More Torque

**DTD152: 165N•m**

Predecessor model: 160N•m

Ergonomically designed handle with soft grip

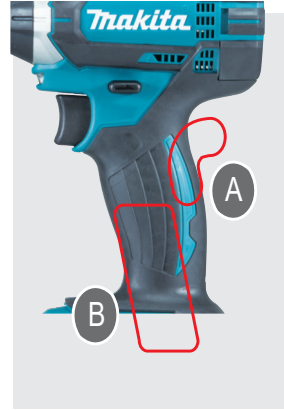

**A** In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened according to the U-shape formed between user's thumb and index finger.

**B** Rubberized soft grip provides comfortable grip and more control while minimizing hand fatigue and pain.

All metal gear construction

All metal gear construction for extra-high transmission durability



21 stages Torque Settings

Predecessor model: 16 stages



## Cordless Impact Driver

## DTD152

448

← 137mm (5-3/8") →



- Variable Speed
- Brake
- Reversing
- Built-in Job Light

Capacity	Machinescrew : M4 - M8 (5/32 - 5/16") Standard bolt : M5 - M16 (3/16 - 5/8") High tensile bolt : M5 - M12 (3/16 - 1/2") Coarse thread (in length): 22 - 125mm (7/8 - 4-7/8")
Impacts per minute (ipm)	0 - 3,500
No load speed (rpm)	0 - 2,900
Max. fastening torque	165N.m
Dimensions (L x W x H)	137x79x238mm (5-3/8"x3-1/8"x9-3/8")
Net Weight*	1.3kg (2.8lbs) with BL1815N 1.5kg (3.3lbs) with BL1850

### Standard Equipment:

DTD152Z:	Hook: 346317-0(1)
DTD152RFE:	Plastic case: 141856-3(1), Hook: 346317-0(1), Battery BL1830B: 197605-6(2), DC18RC FAST CHARGER DC18RC(1)
DTD152SFE3:	Plastic case: 141856-3(1), Hook: 346317-0(1), Battery BL1830B: 197605-6(3), DC18SD BATTERY CHARGER DC18SD(1)
DTD152STE:	Plastic case: 141856-3(1), Hook: 346317-0(1), Battery BL1850B: 198013-4(2), DC18SD BATTERY CHARGER DC18SD(1)
DTD152RME:	Plastic case: 141856-3(1), Hook: 346317-0(1), Battery BL1840B: 198012-6(2), DC18RC FAST CHARGER DC18RC(1)



## Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,  
Hoskote Taluk, Bengaluru - 560067  
Email: info@makita.in Website: www.makita.in