



Cordless Angle Drill
DA332D 10 mm (3/8") / DA333D 10 mm (3/8")

Compact Angle Head Height & Center Height

63 [Headheight] mm

23.5 [Centerheight] mm

Fastdrilling
Up to 35%*

Drilled hole through ø30mm thick Lauan with ø9mm Auger bit.
* Comparison to Previous models.



Ergonomically designed handle with sure grip



Photo: DA332D



DA332D

Keyed Drill Chuck



DA333D

Keyless Drill Chuck



Compact head height shorter than previous models (DA332D: -3mm, DA333D: -4mm)

DA332D



Head height
63mm

Length 313mm

Center height
23.5mm

Easy-to-operate
push button type F/R
change switch

DA333D



Head height
84mm

Center height
23.5mm



LED job light with preglow
and afterglow functions



Large switch lever convenient
for tightening screws



On-tool chuck key storage
for fast & convenient bit changes
(DA332D only)

Keyless drill chuck
(DA333D only)



Comparison of work speed

Drove a $\varnothing 4.1$ mm x 38 mm wood screw into Luan.

DA332D/ DA333D 135

Previous models. 100

0 slow 140 fast

Drilled hole through a 30 mm thick Luan with $\varnothing 9$ mm Auger bit.

DA332D/ DA333D 135

Previous models. 100


0 slow 140 fast

Drilled hole through a 30 mm thick SPF with $\varnothing 12$ mm Auger bit.

DA332D/ DA333D 120

Previous models. 100

0 slow 140 fast

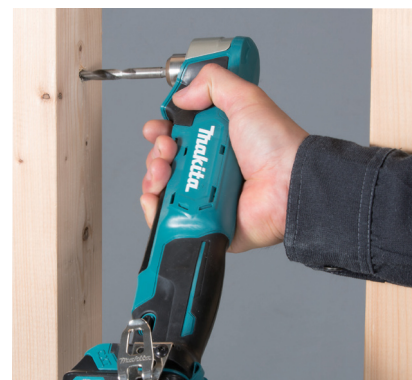

* The test results depend to a great extent on the hardness of the material, etc.

Numbers in the charts above are relative values when the capacities of Previous models is indexed at 100.

Cordless Angle Drill

DA332D 10 mm (3/8") / DA333D 10 mm (3/8")

Variable Speed

Brake

Reversing

Keyless Chuck

Built-in Job Light

Carrying Case

	DA332D	DA333D
Capacity	Steel: 10 mm (3/8") Wood: 12 mm (1/2")	Steel: 10 mm (3/8") Wood: 12 mm (1/2")
No Load Speed (RPM)	0 - 1,100	0 - 1,100
Head Height	63 mm (2-1/2")	84 mm (3-5/16")
Center Height	23.5 mm (15/16")	23.5 mm (15/16")
Vibration Level	Drilling Into Metal: 2.5 m/s ² or less	Drilling Into Metal: 3.0 m/s ² or less
Sound Pressure Level	70 dB(A) or less	70 dB(A) or less
Dimensions (L x W x H)	with BL1016/BL1021B: 313x68x86 mm (12-3/8"x2-11/16"x3-3/8") with BL1041B: 332x68x86 mm (13-1/8"x2-11/16"x3-3/8")	with BL1016/BL1021B: 313x68x95 mm (12-3/8"x2-11/16"x3-3/4") with BL1041B: 332x68x95 mm (13-1/8"x2-11/16"x3-3/4")
Net weight	1.2 - 1.3 kg (2.6 - 2.9 lbs.)	1.2 - 1.4 kg (2.7 - 3.0 lbs.)

DA333DZ: Hook: 346909-5(1), Phillips bit 2-50: 784244-7(1)
DA333DWYE: Hook: 346909-5(1), Phillips bit 2-50: 784244-7(1),
Plastic case: 821723-5(1), Battery BL1016: 198007-9(2),
BATTERY CHARGER: DC10WD(1)

DA333DWAE: Hook: 346909-5(1), Phillips bit 2-50: 784244-7(1), Plastic case: 821723-5(1),
BL1021B: 198008-7(2), BATTERY CHARGER DC10WD(1)

Standard Equipment:

Charging Time



DC10SB



DC10WD



BL1016
12V max 1.5Ah

22

50



BL1021B
12V max 2.0Ah

30

70



BL1041B
12V max 4.0Ah

60

130



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in