Satisfy Professional's Needs

Cordless Recipro Saw

High power and High durability

Vertical crank mechanism

LED job light (DJR360, DJR187)



Retractable rafter hook (DJR360, DJR187






Toolless blade change

Redesign of Blade clamp makes it easier to remove a blade.

Photo : DJR187

Toolless shoe adjustment
(DJR360, DJR187)

Lever system is employed instead of button system.
It prevents the blade lock from unintensional releasing.



18V X2 36V

Power by 18V Li-ion battery

with Battery fuel gauge

BL1860B : 6.0Ah
BL1850B : 5.0Ah
BL1840B : 4.0Ah
BL1830B : 3.0Ah



BL1850B

BL1820B : 2.0Ah
*BL1815N : 1.5Ah
(*without Battery fuel gauge)



BL1815N

Fast Charger
DC18RC



Charger
Two Port Multi Fast Charger
DC18RD




Charger
DC18SD



Efficiency of Metal Cutting

Note: 1. Numbers in the charts below are relative values when the capacities of Competitor "M" at 100.
2. The test results depend to a great extent on the hardness of materials, etc.

Test material: ø1" Carbon steel pipe 25A

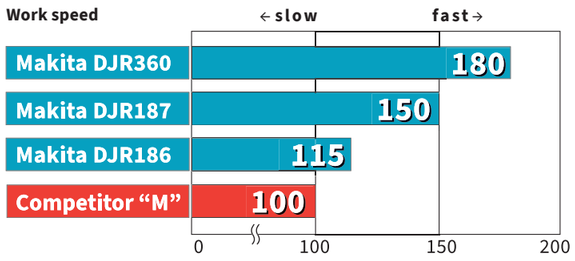


Cordless Reci	
DJR360 / DJR	
Capacity	
Length of Stroke	
Strokes Per Minute (SPM)	
Vibration Level	
Vibration K factor	
Sound Pressure Level	
Sound Power Level	
Noise K factor	
Dimensions (L x W x H)	
Net weight	

Double Insulation
Electronic 2-Speed
Brake
Built-in Job Light
Carrying Case

RECIPROSAWBLADE FOR WOOD: B-05175(1),
FAST CHARGER: DC18RC(1)

DJR186RFE Plastic case: 821620-5(1),Battery BL1850B:198013-6(2)
RECIPROSAWBLADE FOR METAL: B-05169(1),
RECIPROSAWBLADE FOR WOOD: B-05175(1),
FAST CHARGER: DC18RC(1)

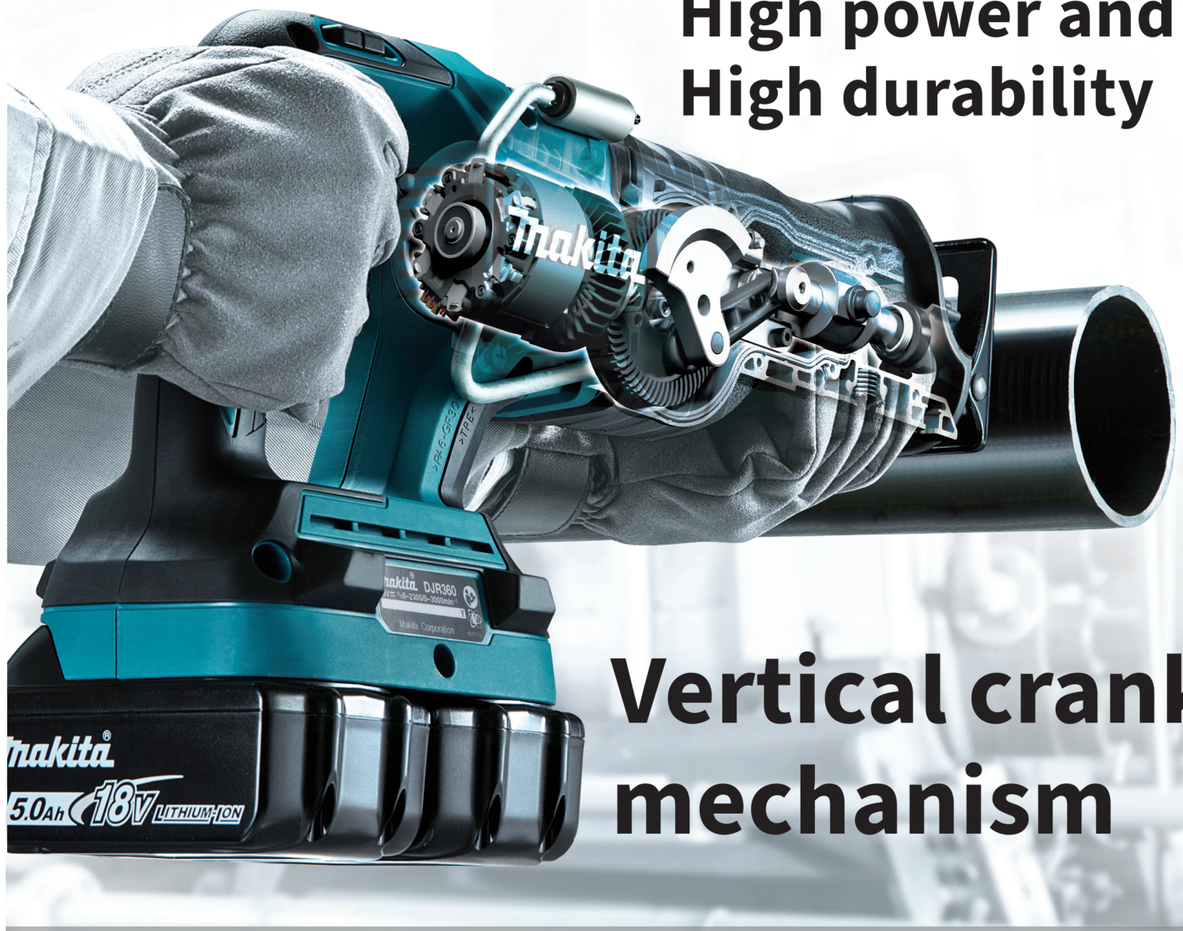

DJR360



DJR187



DJR186









Makita Power Tools India Pvt. Ltd.
Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in

Newly designed vertical crank mechanism

And featuring high output Brushless DC motor, enabling outstanding performance in cutting work.


(DJR360, DJR187)

Photo: DJR187




Photo : DJR360

Smooth cutting with new crank system

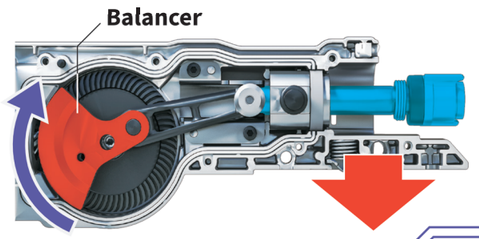

The rolling of Balancer decreases and materials are pushed stronger

Backward stroke is faster

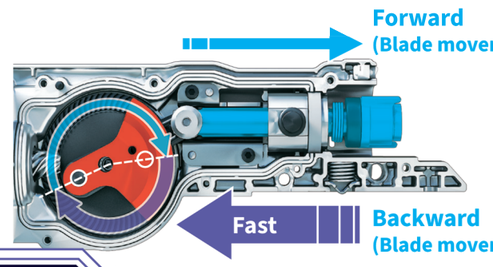

Backward rotating angle is less.

Cutting speed

approx TWICE

as fast as the 18Vx1 predecessor model when cutting a 25A(ø1”) pipe with DJR360.

Long Stroke

32mm

High Speed

Strokes per minute

3,000min^{-1}

(DJR360, DJR187)

High durability

More durable mechanism to hold slider

A roller on the rear end of slider reciprocates on the rail of metal plate, providing higher durability than the current mechanism using plane bearing as the rear slider holder.

Mechanical durability more than twice

More rigid shoe

- Shoe has been reinforced.
- Fixed type shoe is used for added durability.



XPT
EXTREME PROTECTION TECHNOLOGY



