

Durable Shaft Lock
Re-designed durable shaft lock firmly supported by metal sleeve built in gear housing prevents cracks in gear housing and drop of pin cap.



Soft Start
Minimizes start-up shock, and makes the tool start smoothly.



Photo : GA4541R

Dust collecting wheel guard



Part No. vary by country or area



Toolless wheel cover (Option)

Toolless wheel cover is adjustable to any desired position without tool.
(Component for some countries or models, also available as option)



Ezynut (Option)

Ezynut (tool-less lock nut) is available as an option for the models with M14 spindle to replace wheel without wrench.



Anti-vibration grip (Option)

for extra comfort

Angle Grinder (with Anti-restart function)		325			
	without Brake			with Brake	
	115mm	125mm	150mm	115mm	125mm
MODEL	GA4540R	GA5040R	GA6040R	GA4541R	GA5041R
Continuous rating Input	1,100W	1,100W	1,100W	1,100W	1,100W
Wheel diameter	115mm (4-1/2")	125mm (5")	150mm (6")	115mm (4-1/2")	125mm (5")
No load speed (rpm)	11,000	9,000	9,000	11,000	11,000
Dimensions (L x W x H)	303x130x116mm (11-7/8"x5-1/8"x4-9/16")	303x140x116mm (11-7/8"x5-1/2"x4-9/16")	303x171x116mm (11-7/8"x6-3/4"x4-9/16")	303x130x116mm (11-7/8"x5-1/8"x4-9/16")	303x140x116mm (11-7/8"x5-1/2"x4-9/16")
Net Weight*	2.4kg (5.4lbs)	2.5kg (5.4lbs)	2.5kg (5.6lbs)	2.6kg (5.8lbs)	2.7kg (5.9lbs)
Power supply cord	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)

Standard Equipment : Depressed Center Wheel, Lock Nut Wrench, Side Grip, Anti-vibration grip, Diamond wheel, Connector plastic case



Angle Grinder
GA4540R, GA5040R, GA6040R
GA4541R, GA5041R (with Brake)
115mm (4-1/2"), 125mm (5"), 150mm (6")

Satisfy Professional's Needs

1,100W



SJS II

Drastic Evolution of Vibration Absorption

with Anti-restart function series



Makita Power Tools India Pvt. Ltd.
Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in



SJS II

SUPER JOINT SYSTEM



Photo : GA4541R

To suppress vibration to operator



Anti-restart function


Prevents accidental start-up for safety even if the tool is plugged to power source with the switch "on"

Structure of Super Joint System II


Leaf spring absorbs vibration and relieves shock during operation.



Absorption mechanism of vibration

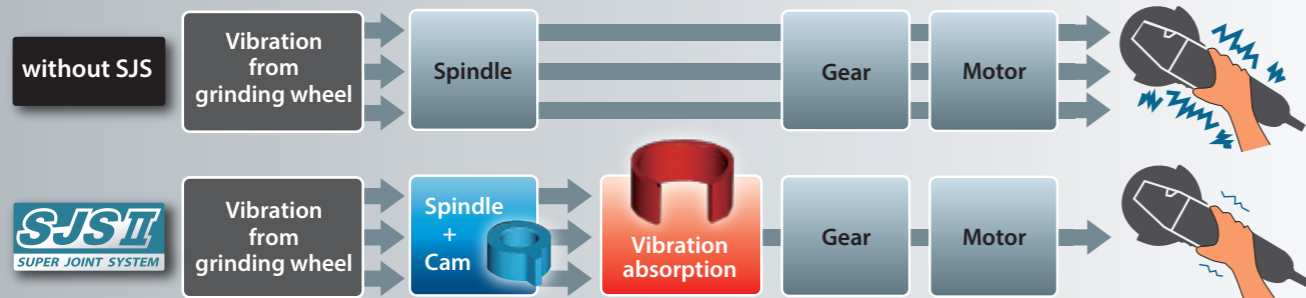

Even if plugged in with the switch "ON", the tool does not start with a blinking red light for visual warning.

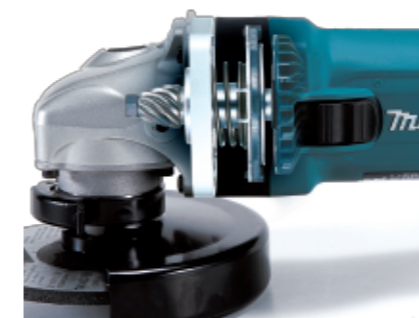

Mechanical brake*

Braking performance is enhanced by the unique brake pad that provides powerful friction.



Barrel grip

Ergonomically best possible barrel grip with a perfect circumference size and shape fits your hand for extra comfortable handling



Solid Green indicates that current can be applied to the circuit.

* Features & Specifications vary by model. See the specifications table