

**Durable shaft lock**

Re-designed durable shaft lock firmly supported by metal sleeve built in gear housing prevents cracks in gear housing and drop of pin cap.

**Soft Start**

Minimizes start-up shock, and makes the tool start smoothly.



Photo : GA4541R

**Dust collecting wheel guard**



for offset diamond wheel.

Part No.  
195238-1  
195239-9  
196575-6

for diamond wheel.

Part No.  
196845-3

Part No. vary by country or area



**Toolless wheel cover** (Option)

Toolless wheel cover is adjustable to any desired position without tool. (Component for some countries or models, also available as option)



**Ezynut** (Option)

Ezynut (tool-less lock nut) is available as an option for the models with M14 spindle to replace wheel without wrench.



**Anti-vibration grip** (Option)

for extra comfort

Angle Grinder ( with Anti-restart function)		without Brake			with Brake	
	115mm	125mm	150mm	115mm	125mm	
<b>MODEL</b>	<b>GA4540R</b>	<b>GA5040R</b>	<b>GA6040R</b>	<b>GA4541R</b>	<b>GA5041R</b>	
<b>Continuous rating Input</b>	1,100W	1,100W	1,100W	1,100W	1,100W	
<b>Wheel diameter</b>	115mm (4-1/2")	125mm (5")	150mm (6")	115mm (4-1/2")	125mm (5")	
<b>No load speed (rpm)</b>	11,000	9,000	9,000	11,000	11,000	
<b>Dimensions (L x W x H)</b>	303x130x116mm (11-7/8"x5-1/8"x4-9/16")	303x140x116mm (11-7/8"x5-1/2"x4-9/16")	303x171x116mm (11-7/8"x6-3/4"x4-9/16")	303x130x116mm (11-7/8"x5-1/8"x4-9/16")	303x140x116mm (11-7/8"x5-1/2"x4-9/16")	
<b>Net Weight*</b>	2.4kg (5.4lbs)	2.5kg (5.4lbs)	2.5kg (5.6lbs)	2.6kg (5.8lbs)	2.7kg (5.9lbs)	
<b>Power supply cord</b>	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)	

**Standard Equipment :** Depressed Center Wheel, Lock Nut Wrench, Side Grip, Anti-vibration grip, Diamond wheel, Connector plastic case

\*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-BC



**Angle Grinder**  
GA4540R, GA5040R, GA6040R  
GA4541R, GA5041R (with Brake)  
115mm (4-1/2"), 125mm (5"), 150mm (6")

Satisfy Professional's Needs

**1,100W**



**SJS II**

**Drastic Evolution of Vibration Absorption**

**with Anti-restart function series**




# SJS II

## SUPER JOINT SYSTEM



Photo : GA4541R

To suppress vibration to operator

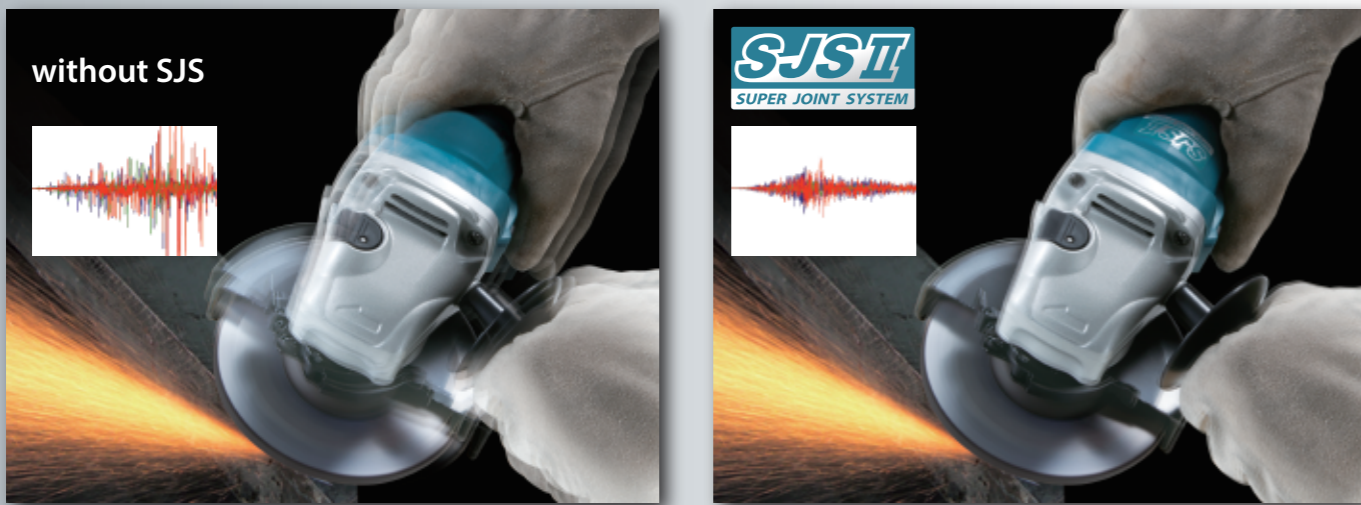


### Anti-restart function


Prevents accidental start-up for safety even if the tool is plugged to power source with the switch "on"

### Structure of Super Joint System II

Leaf spring absorbs vibration and relieves shock during operation.

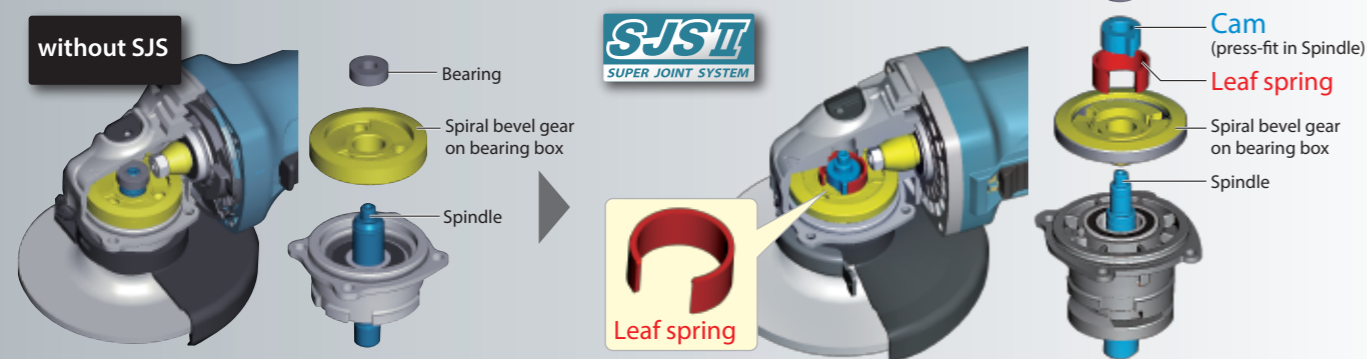

Absorption mechanism of vibration

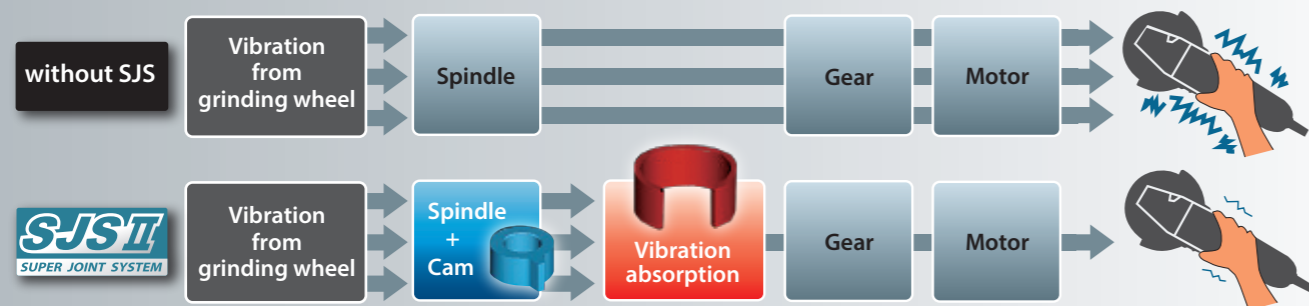

Even if plugged in with the switch "ON", the tool does not start with a blinking red light for visual warning.



### Mechanical brake\*

Braking performance is enhanced by the unique brake pad that provides powerful friction.



### Barrel grip

Ergonomically best possible barrel grip with a perfect circumference size and shape fits your hand for extra comfortable handling



Solid Green indicates that current can be applied to the circuit.

\* Features & Specifications vary by model. See the specifications table