Makita®


Die Grinder GD0603 6mm (1/4")

Easy-to-grip slim body, with added durability



No load speed
28,000 min^{-1}

Excellent performance in grinding and deburring in tight spaces.

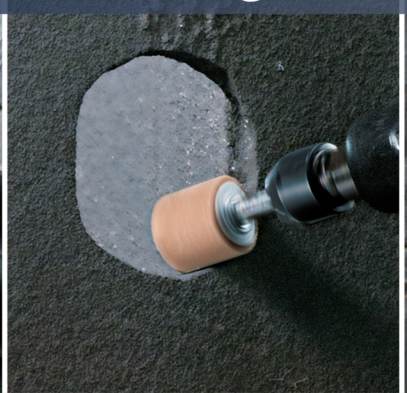

Compact and ergonomic for easy handling.


Round collet nut
reduces the risk of damage / scratches to workpiece compared with the conventional hexagonal collet nuts.

Max collet size
6mm or 1/4”

Slim barrel grip
The diameter and circumference are the same as those of the predecessor 906.



Switch type: Rocker






Anti-loosening structure of Cap



Non-protruding brush holder
design provides easy handling.

No load speed
28,000 min^{-1}

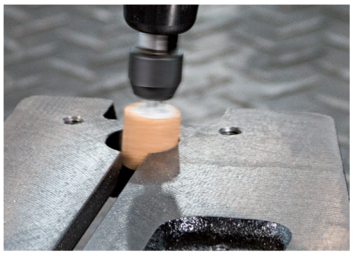



■ Accessori

Wheel point

Application:
A: Mild steel, carbon steel, etc.
WA: Hardened and special steels.

No.	per pkg.	Wheel dia. (mm)	Shank size (mm)	Type	Part No.
1	10	5	3	A	794050-2
1	10	8	3	A	794052-8
1	10	10	3	A	794053-6
2	10	5	3	WA	794054-4
2	10	6	3	WA	794055-2
2	10	10	3	WA	794057-8
3	10	10	3	A	794059-4
1	1	19	6	WA	741614-3
1	1	19	1/4"	WA	741617-7
4	1	19	6	WA	741615-1
4	1	19	1/4"	WA	741616-9

Die Grinder — GD0603 6mm (1/4") 64

Double Insulation

Continuous rating Input	*240W*
Capacity	*Collet : 6mm or 1/4"*
Max wheel diameter	*19mm*
No load speed (rpm)	*28,000*
Dimensions (L x W x H)	*289x64x67mm (11-3/8"x2-1/2"x2-5/8")*
Net weight*	*0.97kg (2.1lbs)*
Power supply cord	*2.5m (8.2ft)*

Standard Equipment : Wheel point 19-60: 741614-3(1), Wheel point 19-60: 741615-1(1), Dressing stone: 741809-8(1), Wrench 10: 781036-5(2)

Makita Power Tools India Pvt. Ltd.
Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in