



Extremely low vibration achieved by ...




1 Damper spring
absorbs reaction force of impact energy.



2 Counterweight mechanism
reduces vibration by moving a counterweight in the opposite direction of the piston.

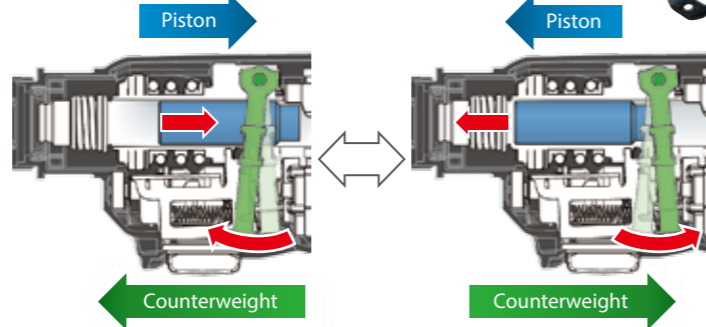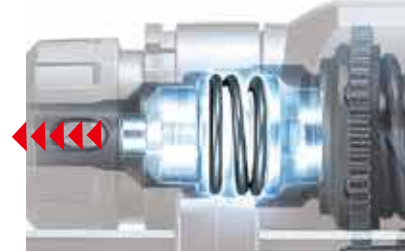

Detachable Dust collection system

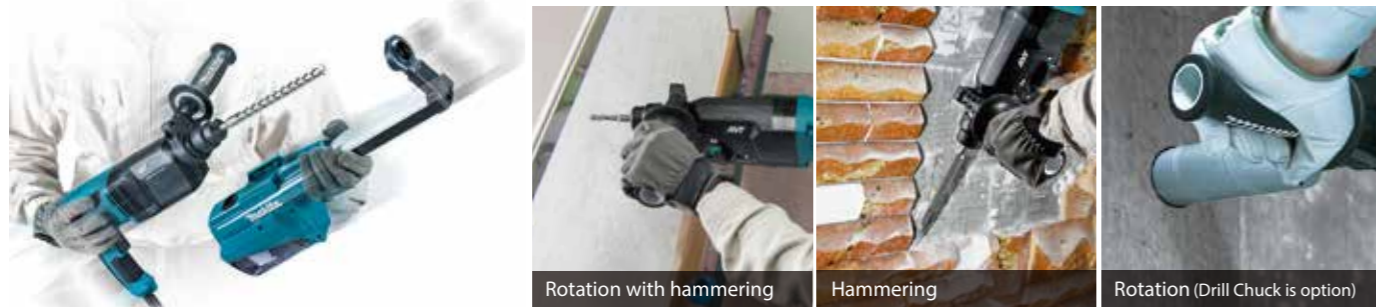

Combination Hammer with Self Dust Collection

HR2650 / HR2651 / HR2651T 26 mm (1"), Adapted for SDS-PLUS bits

325

	HR2650	HR2651	HR2651T
Double Insulation	800W	800W	800W
Variable Speed	EPTA-Procedure 05/2009: 2.4 J Our experimental conditions: 2.9 J	EPTA-Procedure 05/2009: 2.4 J Our experimental conditions: 2.9 J	EPTA-Procedure 05/2009: 2.4 J Our experimental conditions: 2.9 J
Reversing	Capacity	Capacity	Capacity
SDS-PLUS Shank	Concrete: 26 mm (1") Core Bit: 68 mm (2-11/16") Diamond Core Bit (Dry Type): 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")	Concrete: 26 mm (1") Core Bit: 68 mm (2-11/16") Diamond Core Bit (Dry Type): 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")	Concrete: 26 mm (1") Core Bit: 68 mm (2-11/16") Diamond Core Bit (Dry Type): 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Torque Limiter	Blows Per Minute (BPM) No Load Speed (RPM)	Blows Per Minute (BPM) No Load Speed (RPM)	Blows Per Minute (BPM) No Load Speed (RPM)
Dust Collection	91 dB(A) Sound Pressure Level 102 dB(A) Vibration Level Hammer Drilling Into Concrete: 12.5 m/s ²	92 dB(A) Sound Pressure Level 103 dB(A) Vibration Level Hammer Drilling Into Concrete: 11.5 m/s ²	92 dB(A) Sound Pressure Level 103 dB(A) Vibration Level Hammer Drilling Into Concrete: 11.5 m/s ²
Carrying Case	Dimensions (L x W x H) Net weight Power supply cordz	Dimensions (L x W x H) Net weight Power supply cordz	Dimensions (L x W x H) Net weight Power supply cordz

Standard Equipment: Side Grip, Depth Gauge, Sealing Cap

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201708



Combination Hammer with Self Dust Collection System
HR2650 / HR2651 / HR2651T
26 mm (1"), SDS-PLUS bits



SDS-PLUS Shank

Combination Hammer with Self Dust Collection System



Photo: HR2651

CLEAN HEPA filter
Dust Collection System
Equipped with HEPA Filter

HR2650




HR2651



HR2651T



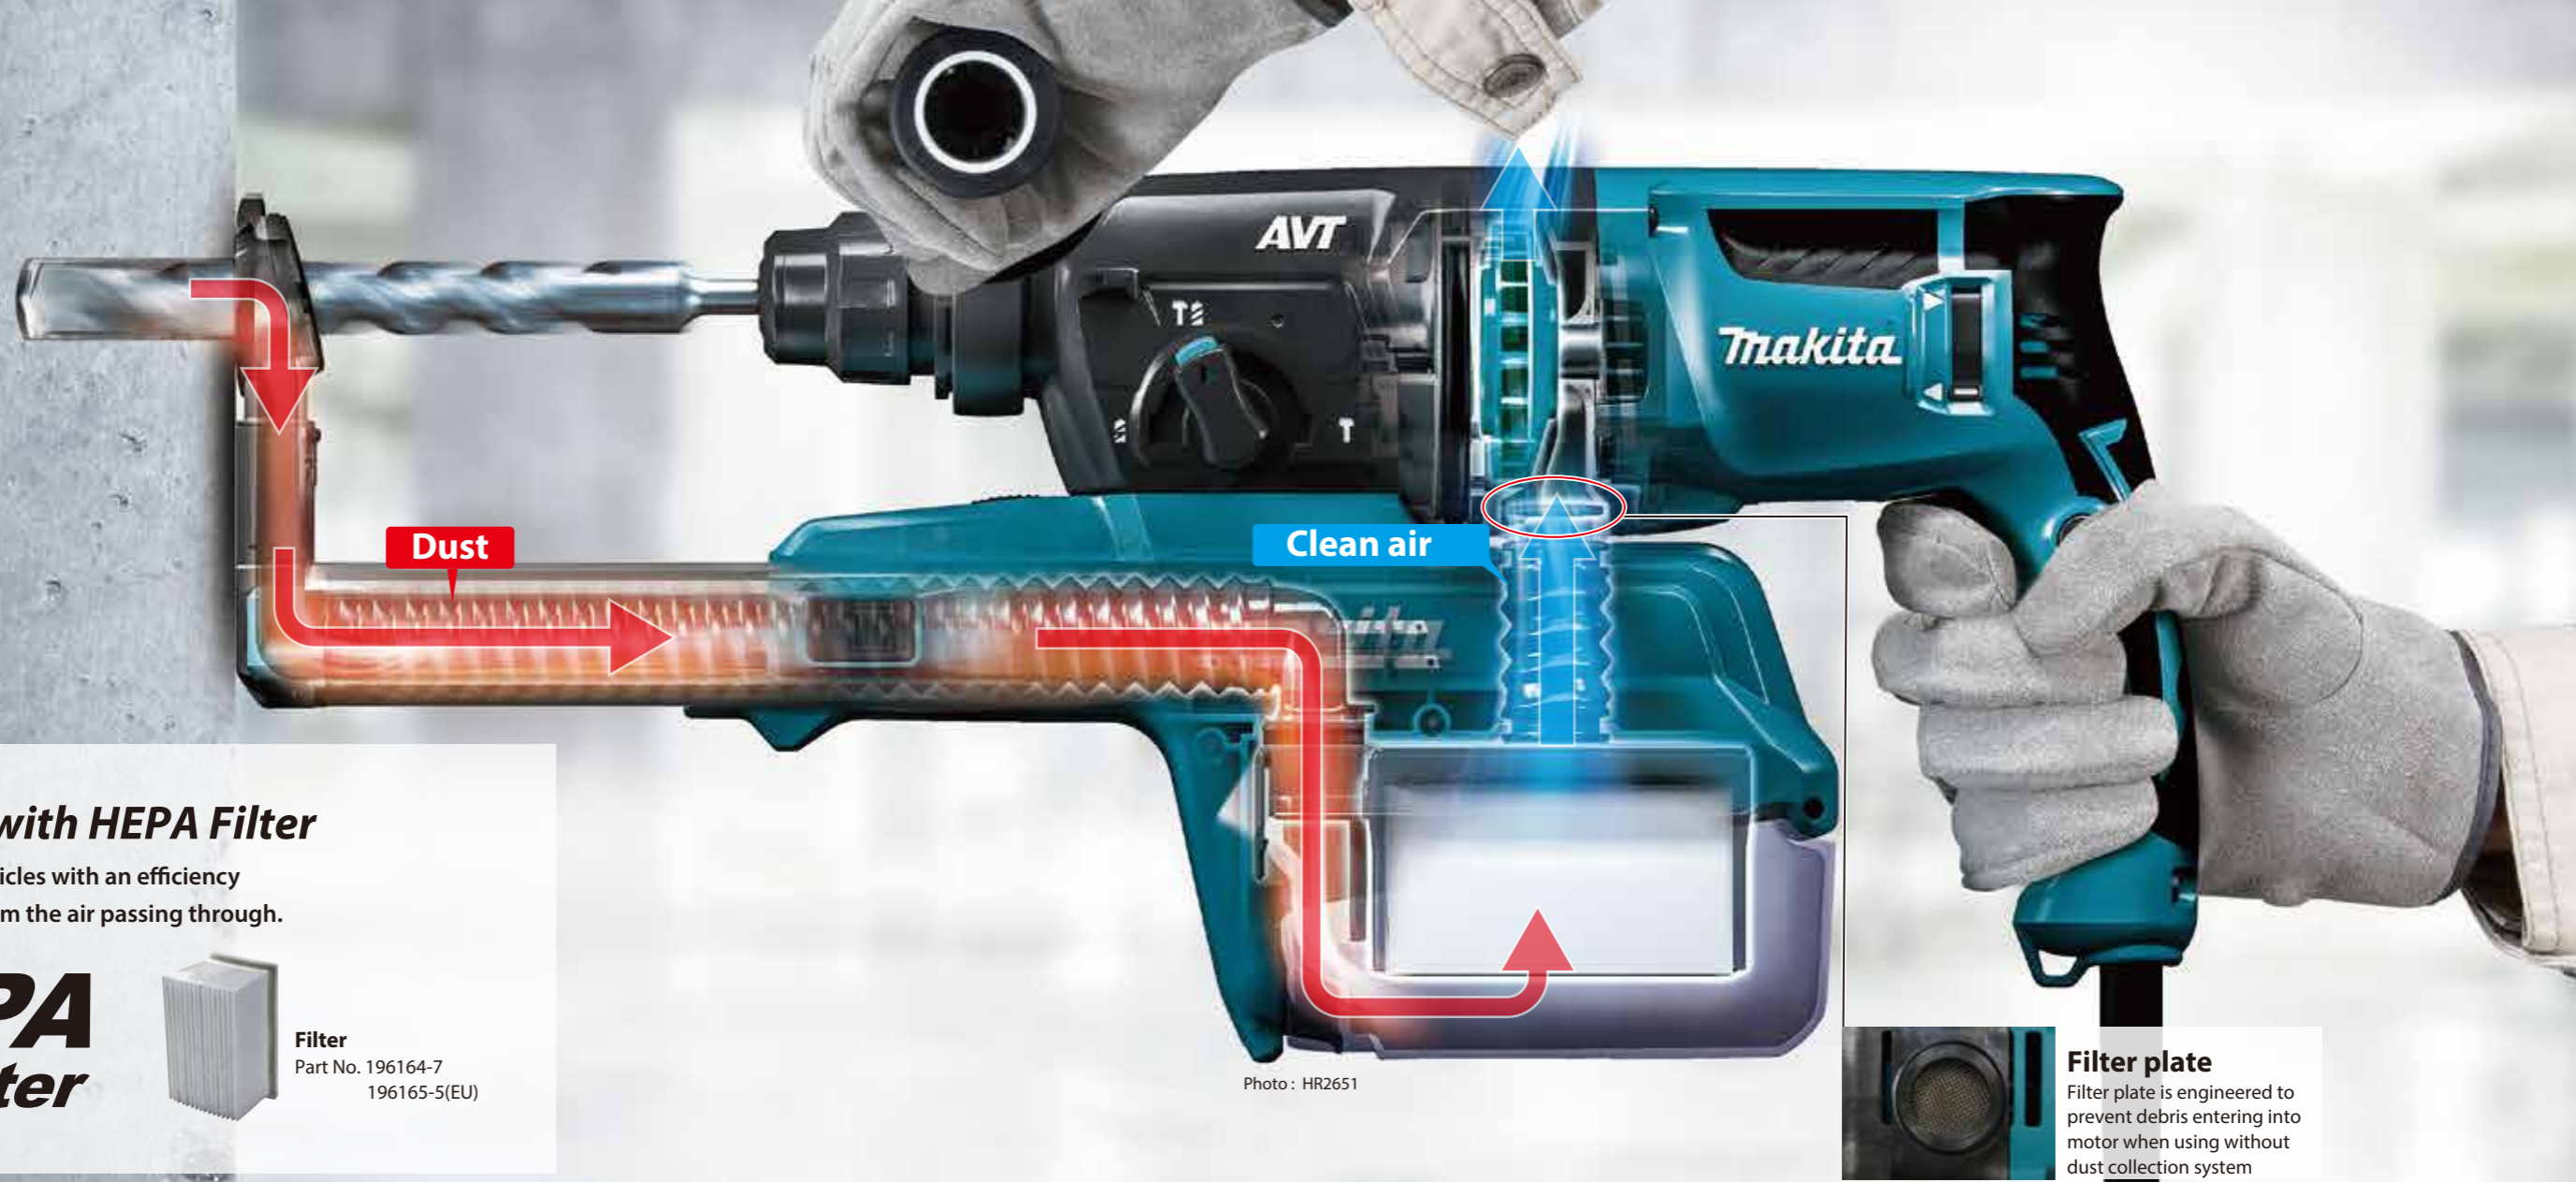

Equipped with HEPA Filter

which removes particles with an efficiency rating of 99.75% from the air passing through.

HEPA filter



Filter
Part No. 196164-7
196165-5(EU)


Photo: HR2651

Filter plate

Filter plate is engineered to prevent debris entering into motor when using without dust collection system



High dust collection performance for overhead application

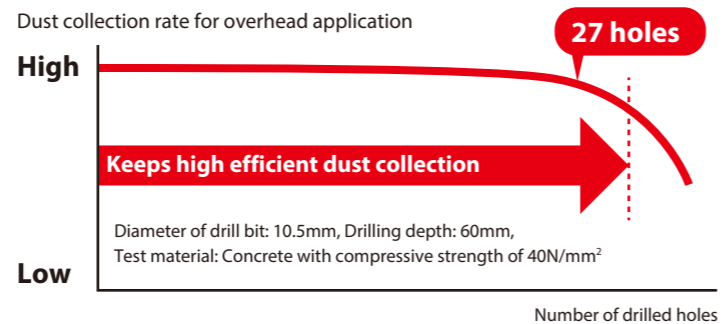

Large Fan Provides Incredibly High Dust Extraction Power



High rotation speed
20,900
min⁻¹

Enables to accept longer drill bits

Adjustable drilling depth

Telescopic guide also functions as a depth gauge. A desired drilling depth can be adjusted simply by sliding a push button on the guide to the desired point.



Position adjustment of Dust Extraction Inlet

one action adjustment according to bit length simply by pushing a single push button



Secure connection

between dust case and dust collecting section allows for less dust leakage

Easy disposal of dust and easy cleaning of dust case

- Dust case cover is easy to open/close with a single operation of a locking tab
- Wide opening of dust case



Dust case
Part No. 198982-9
198981-1(EU)

Transparent dust case for easy checking of collected dust amount