



Adapted for SDS-MAX bits

Easy-to-operate operation mode change lever

- The mode lock lever of the current HR5211C series is eliminated for easier mode change.
- Located on the top of the motor housing for reduced possibility of breakage even if the machine is carelessly laid.

Torque limiter

One touch sliding chuck for easy bit changes

Soft grip

provides more comfort and control.

Electronic with:

- Constant speed control
- Soft start for reducing start-up torque

LED power light that indicates trouble with the electric circuit

LED service light that indicates when to replace carbon brush

Variable speed control by dial


Photo : HR52120C (Tool does not come with bit.)

Accessories / Optional

Dust Extractor Attachment Set

The dust extractor attachment can be attached without replacing the side handle.

Part No. 196858-4

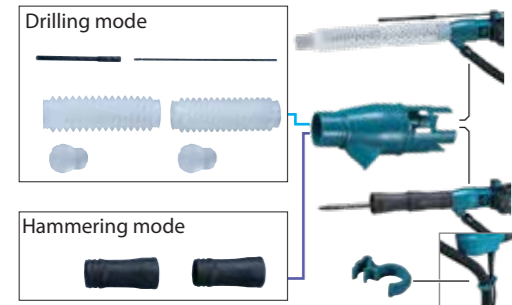


Dust Extractor Attachment Set

Hammering only

Part No. 196571-4

Connected with vacuum cleaner, this attachment is able to extract fine dust particles at very high dust extraction rate to provide cleaner work environment.

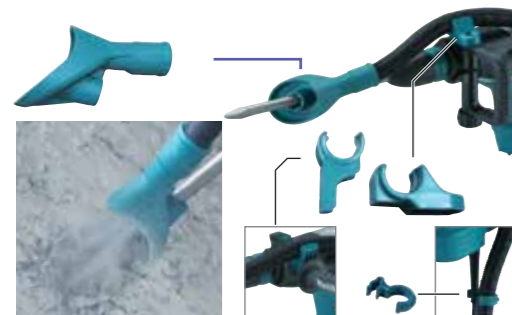

Rotary Hammer	HR5212C / HR5202C	175
	52mm (2-1/16") Adapted for SDS-MAX bits	
Continuous rating Input	1,510W	
Capacity	Concrete (with T.C.T. bit) : 52mm (2-1/16") Concrete (with Core bit) : 160mm (6-5/16")	
Impacts per minute (ipm)	1,100 - 2,250	
No load speed (rpm)		
Dimensions(L x W x H)	HR5212C: 599x140x287mm (23-1/2"x5-1/2"x11-1/4") HR5202C: 599x134x287mm (23-1/2"x5-1/4"x11-1/4")	
Net weight*	HR5212C: 11.9kg (26.2lbs) HR5202C: 10.9kg (24.1lbs)	
Power supply cord	5.0m (16.4ft)	
Standard Equipment :	Side handle 90 assembly : 135283-4(1), Side grip assembly : 135629-4(1), Grease vessel : 194683-7(1), Plastic case : 196552-8(1), Depth gauge : 331955-1(1) (Tool does not come with bit.)	
<ul style="list-style-type: none"> Double Insulation Variable Speed Adapted for SDS-MAX bits Torque Limiter Constant Speed Soft Start Carrying Case 		



Rotary Hammer 52mm (2-1/16") HR5212C / HR5202C

Satisfy Professional's Needs



Adapted for SDS-MAX bits



AVT & SOFT
ANTI VIBRATION TECHNOLOGY **NO LOAD**

ADVANCED
Vibration Control

Extra Comfort with unrivalled low level of vibration

Photo : HR5212C (Tool does not come with bit.)



Makita Power Tools India Pvt. Ltd.
Unit II, Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067

Email: info@makita.in

Website: www.makita.in

AVT

ANTI VIBRATION TECHNOLOGY

HR5212C only

High performance

Drilling efficiency

15% higher

with 32mm diameter bit

Compared with our predecessor model

Chipping efficiency

10% higher

with bull point

Comparison of Vibration level* and Time to reach ELV (Exposure Limit of Vibration)**

HR5212C	9.0m/s²	148min.
Predecessor Model	12.5m/s ²	77min.
Competitor "B"	20.5m/s ²	29min.

*It is known as the tri-axial value and value at Directive of A(8).

**It means the maximum amount of vibration that an operator may be exposed to on any single day.



Adapted for SDS-MAX bits

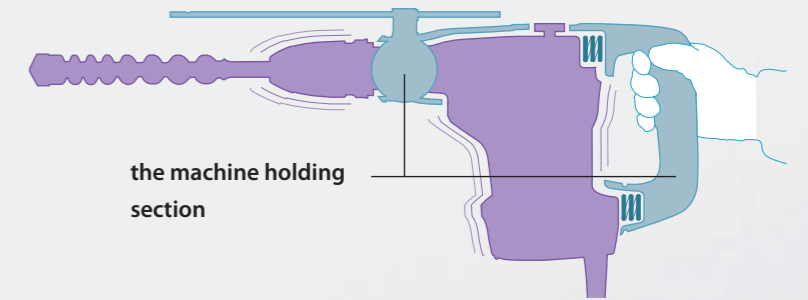


Photo : HR5212C (Tool does not come with bit.)

Unrivalled low level of vibration


Vibration absorbing housing

This is the new AVT mechanism advanced from the current "Vibration absorbing handle". The level of vibration is further reduced by completely separating the machine holding section from the motor/transmission section




Active dynamic vibration absorber

ensures operation with extremely low vibration. allows tool design with flat body sides for better handling.

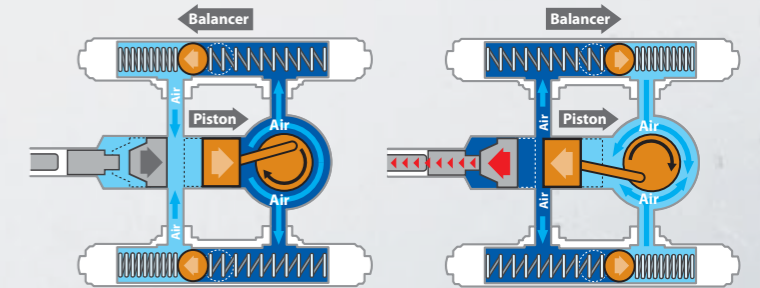

Damper spring

absorbs reaction force caused by drill bit at the moment of impact.

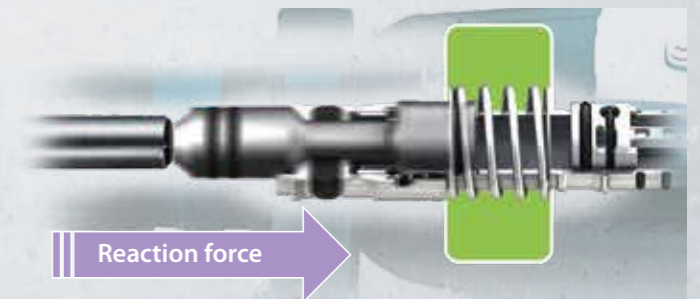

During no-load

SOFT NO LOAD

HR5212C only


Suppression of motor speed

- reduces vibration of tool body when idling, accordingly decreases the amount of vibration to operator's hands during a day's operation.
- minimizes deflection of bit tip from aiming point when starting chipping.


Motor speed

During no-load

Under load

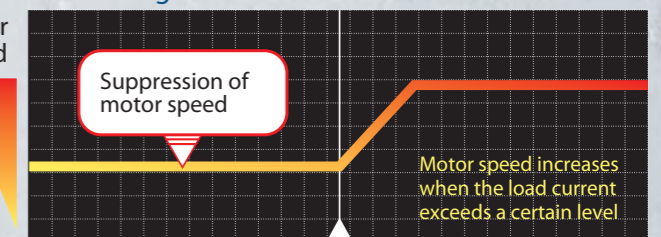

when starting chipping

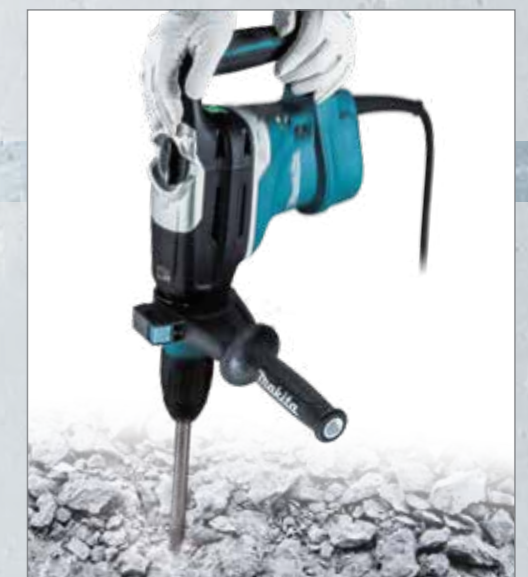

lock-on in hammering mode



Lock-on switch for continuous chiseling applications

Trigger switch for intermittent chiseling applications

Rotation with hammering

Bit angle settings

