

Specifications

Angle Grinder / Electronic Disc Sander

Angle Grinder GA7010C

Max. capacities (dia.)	
Depressed center wheel	180 mm (7")
Wire cup brush	110 mm (4-3/8")
Cut-off wheel	180 mm (7")
Continuous rating	
Input	2,000 W (European market)
No load speed	8,400 min ⁻¹ (rpm)
Overall length	453 mm (17-7/8")
Spindle thread	DIN type
Net weight	3.4 kg (7.5 lbs)
Power supply cord	2.5 m (8.2 ft.)

Angle Grinder GA9010C


Max. capacities (dia.)	
Depressed center wheel	230 mm (9")
Wire cup brush	110 mm (4-3/8")
Cut-off wheel	230 mm (9")
Continuous rating	
Input	2,000 W (European market)
No load speed	6,000 min ⁻¹ (rpm)
Overall length	453 mm (17-7/8")
Spindle thread	DIN type
Net weight	3.4 kg (7.5 lbs)
Power supply cord	2.5 m (8.2 ft.)

Electronic Disc Sander SA7000C

Max. capacities (dia.)	
Abrasive disc	180 mm (7")
Pad	180 mm (7")
Continuous rating	
Input	1,600 W
No load speed	0 - 4,000 min ⁻¹ (rpm)
Overall length	453 mm (17-7/8")
Net weight	3.2 kg (7.1 lbs)
Power supply cord	2.5 m (8.2 ft.)

Specifications may differ from country to country.

Dimension

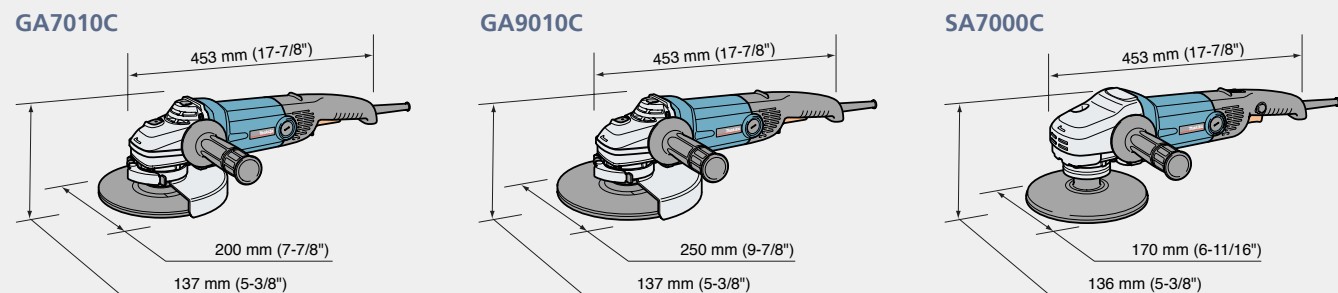

Standard equipment

Angle Grinder / Electronic Disc Sander

For GA7010C / GA9010C	Part No
Lock nut wrench 35	782407-9
Grip	152539-0

For SA7000C	Part No
Rubber pad 170	743012-7
Lock nut wrench 35	782407-9
Grip	152539-0
Head cover	418529-6
Sanding lock nut (DIN)	224515-5
+ Round head screw M14 x 10	265136-4

Items of standard equipment may differ from country to country.

Optional Accessories




Angle Grinder / Electronic Disc Sander

For Model GA7010C / GA9010C		Part No	
Dust collecting wheel guard		193002-4	
Wire cup brush 110mm (DIN)		794372-0	
Super flange 47 (DIN)		192227-7	
Outer flange 78 (DIN) For cut-off wheel		224256-3	
Depressed center wheel	Size	Grit	Part No
	180 mm	24	741425-6
	(For Model GA7010C)	36	741426-4
	230 mm	24	741421-4
(For Model GA9010C)	36	741422-2	
Dust cover attachment		193956-5	
For Model GA7010C / GA9010C / SA7000C		Part No	
Rubber pad 170		743012-7	
Sanding lock nut (DIN)		224515-5	

Abrasive disc (10 per pkg.) For stone and plastics.			
Grit	Part No	Grit	Part No
CC16	794091-8	CC50	794094-2
CC20	794092-6	CC80	794095-0
CC24	794093-4	CC100	794220-3
CC30	794218-0	CC120	794221-1
For Model SA7000C		Part No	
Wool bonnet		794176-0	
Backing pad (DIN) Hook & loop type		743053-3	
Wool pad (Use with Backing pad and Sleeve18)		192629-7	
Sponge pad (Use with Backing pad)		794620-7	
Sleeve 18		262542-4	



A world's leading manufacturer of power tools



Angle Grinder

180 mm (7") Model GA7010C
230 mm (9") Model GA9010C

Electronic Disc Sander

180 mm (7") Model SA7000C

Compact, Light weight Grinder series.



NEW



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk, Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007
Email: sales@makita.in Website: www.makita.in



A world's leading manufacturer of power tools


Compact, Light weight and High power-to-weight ratio by New Motor for greater efficiency and reduced operator fatigue.

Electronic features for

1. Constant rotational speed even under the loaded condition.
2. Current limiter to protect the motor against the over heat which arises from over load.
3. Soft start



The rotational sections, efficiently guarded against grinding dust. (GA7010C / GA9010C)

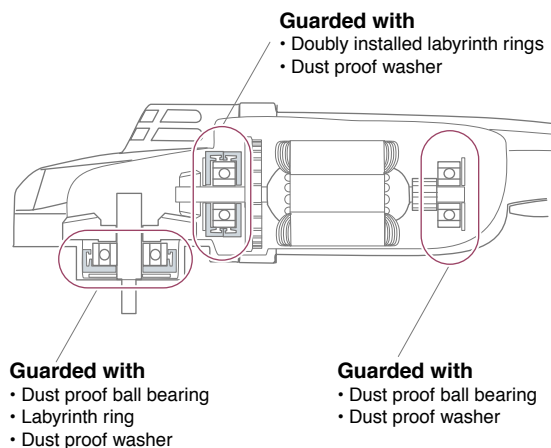

Angle Grinder GA7010C / GA9010C

Electronic Disc Sander SA7000C

1. Gear housing swivels at every 90°

2. Toolless wheel cover (GA7010C / GA9010C only)

The position of wheel cover can be changed easily without any tools.



3. Grip (GA7010C / GA9010C only)

Grip can be attached in 3 position.



4. Dust Cover Attachment

(GA7010C / GA9010C only : Optional Accessory)

Removable Dust Cover Attachment shuts out coarse dust, such as aluminum grinding dust.




5. Large switch trigger for easy operation (GA7010C / GA9010C only)

6. Spindle lock with the following features

Formed to avoid accidental operation which causes the damage on gear section. Large button to lock spindle efficiently, when changing wheels.

7. Compact Light weight

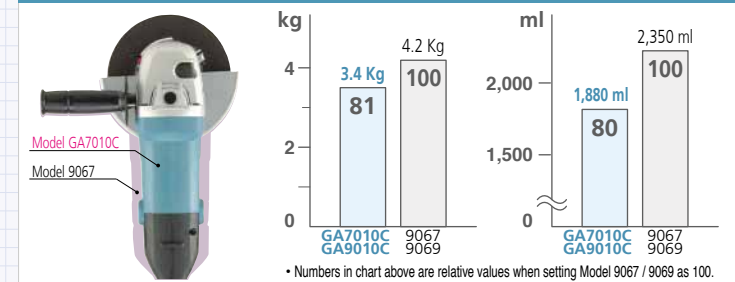

8. Practical plastic head cover to grip during the work (SA7000C only)

9. Pre-setting dial (SA7000C only)

Pre-setting dial for selecting the optimal rotational speed. The selecting area is 1,500 - 4,000 min⁻¹.



10. Practical switch trigger for speed control (SA7000C only)

It is very useful, when grinding burr or edge.