Satisfy Professional's Needs

# Cordless Straight Shears 1.6mm (16Ga)

## BJS160 14.4V 3.0Ah LITHIUM-ION  BJS161 18V 3.0Ah LITHIUM-ION

# Straight design provides smooth control



# High cutting performance

**Cuts up to 1.6mm (16Ga) thick mild steel sheet; capable of cutting a layer of two 0.8mm (22Ga) thick roofing metal sheets in a single pass.**

| Max cutting capacity | |
|---|---|
| | Steel up to 400 N/mm² : 1.6mm |
| | Steel up to 600 N/mm² : 1.2mm |
| | Aluminum up to 200 N/mm² : 2.5mm |

**Lightweight**
**1.9kg** (Model BJS160) **2.0kg** (Model BJS161)




**On-tool storage for hex wrench**

**Powered by Li-ion Battery**

**BJS161:** BL1830 (18V/3.0Ah)

**BJS160:** BL1430 (14.4V/3.0Ah)

Photo: BJS161

**Externally accessible carbon brush**

**Easy-to-operate slide-type on/off switch with lock-on function**

**Easy-to-grip motor housing**

- Small circumference for easy handling
- Rubberized soft grip for more comfort and better control with minimized hand fatigue and pain.

**Easy and fine cutting**


- Double cutting mechanism for less workpiece deformation than single blade cutting.
- The blade clearance can be adjusted according to thicknesses of workpiece so that cutting surface is fine without burrs.

**Anti-restart function (with warning lamp)**

The motor does not start up if battery is inserted with the switch locked on. In this case, the lamp starts blinking slowly, indicating that the Anti-restart function is on.

**Battery capacity warning lamp**

When remaining battery capacity decreases below a certain limit, the motor automatically stops and solid red light reminds you to replace battery.

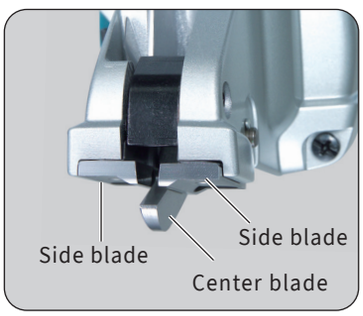


**Anti-restart function process**

Inserts battery with slide switch is ON

↓

Warning lamp starts blinking

↓

NO START UP by working Anti-restart function

## Accessories

**Fast Charger**
DC18RA
Charging time approx. 22 minutes



**Center blade**
Part No. 792534-4



**Side blade set**
Part No. 792533-6



## Cordless Straight Shear

Anti-restart function



## BJS160 / BJS161 1.6mm (16Ga)

| | |
|---|---|
| **Capacity** | **Steel up to 400 N/mm² :** *1.6mm* |
| | **Steel up to 600 N/mm² :** *1.2mm* |
| | **Aluminum up to 200 N/mm² :** *2.5mm* |
| **Strokes per minute (spm)** | *4,300* |
| **Dimensions** | *362 x 78 x 103mm (14-1/4" x 3-1/16" x 4-1/16") BJS160* |
| **(L x W x H)** | *362 x 78 x 118mm (14-1/4" x 3-1/16" x 4-5/8") BJS161* |
| **Net weight** | *1.9kg (4.2lbs) BJS160* |
| | *2.0kg (4.4lbs) BJS161* |
| **Voltage** | *14.4V BJS160* |
| | *18V BJS161* |

**Standard Equipment**
DJS161Z: Thickness gauge: 762013-6(1), Hex. wrench 3: 783201-2(1)


**Makita Power Tools India Pvt. Ltd.**
Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in