



Rotary Hammer
HR4002 40mm (1-9/16")

Satisfy Professional's Needs



**TOP EFFICIENCY
AND SPEED**



2 Mode Rotary Hammer



SDS-Max Shank



2 Mode Change Lever


Hammering with Rotation

Hammering

Chisel locking at 12 different positions




Slide Chuck

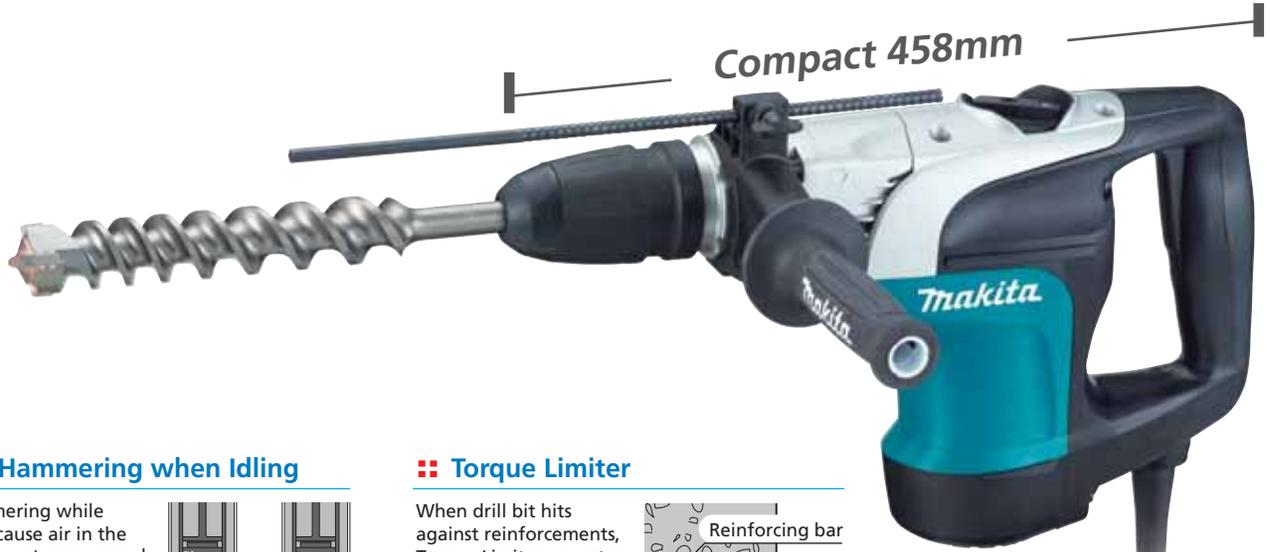

Compact 458mm


No Hammering when Idling

No Hammering while idling because air in the cylinder is not compressed unless tool is pressed against ground. This function ensures machine's long life.



Torque Limiter

When drill bit hits against reinforcements, Torque Limiter operates to stop the rotation of drill bit, ensuring safety in your work.



Rubberized Grip

Provides more comfort and control while minimizing hand fatigue and pain.



Aluminum Housing

Provides high quality and toughness.

Auto Cut-Out Carbon Brush

When Carbon Brush wears out, it will automatically stop the motor. It protects commutator and indicates time for maintenance.


Comparison of Efficiency

Note: 1. It may differ under some conditions.
2. Numbers in the charts below are relative values when the capacities of Competitor "B" are indexed at 100.


1 Test conditions: Drilled in concrete with compressive strength of 40N/mm² to a depth of 40mm.

2 Test conditions: Chipped concrete with compressive strength of 40N/mm², and measured the amount of concrete removed.

1 Drilling (Bit diameter: 35mm)

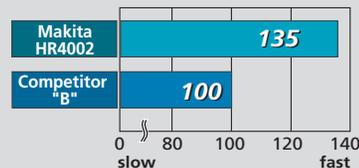

2 Chipping

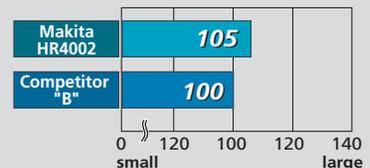

Rotary Hammer

Double Insulation

Torque Limiter

Carrying Case



HR4002 40mm (1-9/16")

350 rpm

Continuous rating Input	1,050W (10A: North America)
Max. bit dia.	40mm (1-9/16")
Max. core bit dia.	105mm (4-1/8")
Blows per minute	2,500bpm
No load speed	680rpm
Dimensions (L x W x H)	458mm x 114mm x 256mm (18" x 4-1/2" x 10-1/8")
Net weight	6.2kg (13.7lbs)
Power supply cord	5.0m (16.4ft)

Standard Equipment

Depth Gauge, Grip Assembly, Grease Vessel (Tool does not come with bit)

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23315-2 2007-04