



Satisfy Professional's Needs

# Straight Metal Shear JS1601 1.6mm(16Ga)

JS1601



Easy and Comfortable Handling



# Ingenious Aesthetic Design Provides More Control and High Maneuverability




## Ergonomically best possible barrel grip for straight shear

achieved by the ingenious design of motor housing and rear cover that feature:

- 1** Motor housing with a small circumference of 180mm obtained by using non-protruding brush holders and designed as close to a perfect circle as possible
- 2** Motor housing and rear cover ergonomically and uniquely ribbed for sure and comfortable finger hold
- 3** Rear cover ergonomically tapered for easy grip



## Minimum cutting radius

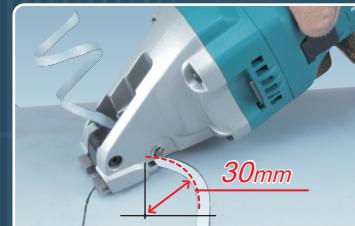

Model: JS1000

Cutting radius may differ by cutting condition or material.

**On-tool storage for hex wrench**  
Hex wrench can be stored on either side for operator's convenience.



## Accessories

Center blade & Side blade



Side blade

For Model	Center blade	Side blade
	Part No.	Part No.
JS1601	792534-4	792533-6
JS1000	792537-8	792536-0

Powerful  
380W

## Side blades fixed more stably

The 2 holes to fix side blades are strengthened for extended tool life.

Double Insulation



JS1601

## Metal Shear

JS1000 1.0mm (20Ga) 459

Continuous rating Input Capacity	380W
	Steel up to 400N/mm <sup>2</sup> : 1.6mm
	Steel up to 600N/mm <sup>2</sup> : 1.2mm
	Steel up to 800N/mm <sup>2</sup> : 0.8mm
	Aluminum up to 200N/mm <sup>2</sup> : 2.5mm
Min. cutting radius	250mm (9-7/8")
Strokes per minute (spm)	4,500
Dimensions (L x W x H)	320x70x78mm (12-5/8"x2-3/4"x3-1/16")
Net weight*	1.4kg (3.1lbs)
Power supply cord	2.5m (8.2ft)
Standard Equipment	Thickness gauge: 762013-6(1), Hex. wrench: 3 783201-2(1)



## Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,  
Hoskote Taluk, Bengaluru - 560067  
Email: info@makita.in Website: www.makita.in