




Low Vibration & Low Noise

(vibration value = vector sum of 3 axes)

Comparison of Vibration level


(loaded)

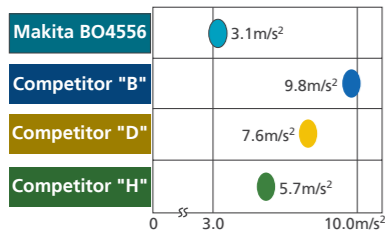

Vibration level of BO4556 is less than half of vibration level of competitor "B" or "D".

Comparison of Noise level

(loaded)

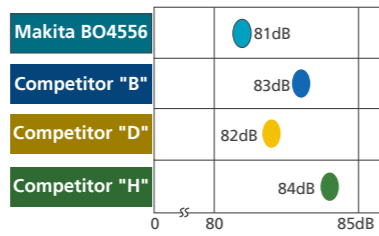

Noise level of three BO4556s is equal to that of one competitor "H".



Accessories

Plastic Carrying Case
Part No. 824806-0



Paper dust bag holder
Part No. 193932-9

Paper bag (5pcs./set)
Part No. 193712-3

Dust bag assembly
Part No. 166078-4



Abrasive paper
For Model: BO4555, BO4556
Paper Size: 114mm x 140mm



Grit	per pkg.	Part No.
60	10	794216-460
80	10	794469-5
100	10	794215-660
150	10	794214-8

Punch plate
Part No. 450066-4
For Model: BO4555, BO4556



Finishing Sander BO4555 / BO4556 / BO4565 / BO4566

Double Insulation

Dust Collecting

Hook & Loop
(BO4555 / BO4565 / BO4566)



	BO4555	BO4556	BO4565	BO4566
Continuous rating Input	200W	200W	200W	200W
Pad size	112 x 102mm (4-3/8" x 4")	112 x 102mm (4-3/8" x 4")	112 x 190mm (4-3/8" x 7-1/2")	100 x 164mm (3-15/16" x 6-1/2")
Abrasive paper size	Hook & loop: 114 x 102mm (4-1/2" x 4")	-	114 x 102mm (4-1/2" x 4")	102 x 166mm (4" x 6-1/2")
Clamp:	114 x 140mm (4-1/2" x 5-1/2")	114 x 140mm (4-1/2" x 5-1/2")	-	-
Triangle:	-	-	96 x 96 x 96mm (3-3/4" x 3-3/4" x 3-3/4")	-
Dimensions (L x W x H)	131 x 112 x 142mm (5-1/8" x 4-3/8" x 5-5/8")	131 x 112 x 141mm (5-1/8" x 4-3/8" x 5-9/16")	219 x 112 x 139mm (8-5/8" x 4-3/8" x 5-1/2")	197 x 100 x 137mm (7-3/4" x 3-15/16" x 5-3/8")
Orbits per minute (opm)	14,000	14,000	14,000	14,000
Net weight	1.1kg (2.4lbs)	1.1kg (2.4lbs)	1.1kg (2.4lbs)	1.1kg (2.4lbs)
Power supply cord	2.0m (6.6ft)	2.0m (6.6ft)	2.0m (6.6ft)	2.0m (6.6ft)
Standard Equipment	Abrasive Paper set, Dust Bag, Punch plate	Abrasive Paper set, Dust Bag, Punch plate	Abrasive Paper set, Dust Bag	Dust Bag



Finishing Sander

BO4555/ BO4556/ BO4565/ BO4566



Freestyle Sanding

Smooth Sanding
by Powerful 200w motor

Comfortable Sanding
by Low Noise and Low Vibration

Clean Sanding
by High Dust Extraction



Makita Power Tools India Pvt. Ltd.


Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk, Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007
Email: sales@makita.in Website: www.makita.in

Powerful
200W
motor

Freestyle Sanding

Ergonomically Contoured Grip with Non-Skid Elastomer Covered Surface.

Fits your palm perfectly. Also provides more control and comfort while minimizing hand fatigue and pain when gripping the tool from the side.

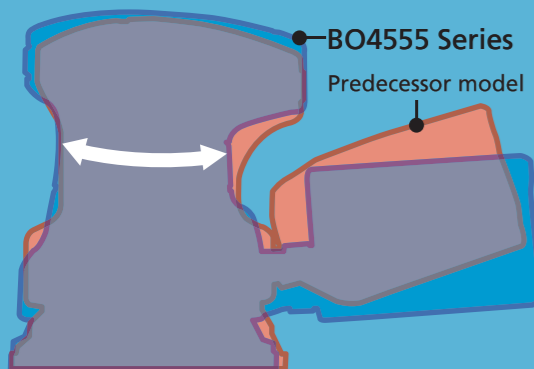

Slimmer design allows secure grip with all the fingers relaxed.

Ergonomic shape of the tool head designed based on research of palm sizes.



BO4566
Hook & Loop



BO4565
Hook & Loop



BO4555
Clamp/
Hook & Loop



BO4556
Clamp



Low Vibration : 3.1m/s² (loaded)*
Dual counterweight balancing system for reduced vibration.
Low noise 81dB (loaded)*
by aluminum foot and counterweight
*In case of using BO4556



Rigid aluminum foot
with dust-proof sponge for longer tool life
Enhanced Foot



High Dust Extraction
Dust is extracted through 6-hole under Pad and collected into Dust Bag. Also, instead of Dust Bag, Makita Vacuum Cleaner can be connected to the tool using Adapter.



Easy-to-Operate Paper Clamp
(BO4555 and BO4556)
Easy installation/removal of paper with rolled clammer's edges



•Conveniently located ON / OFF Switch for One-Handed Operation.
•Rubber Switch Cover prevents ingress of dust.