

Satisfy Professional's Needs

Makita[®]

Circular Saw
HS7600 / HS7000 185mm (7-1/4")

Smooth and powerful cutting



ita

1,200W

Continuous rating input

Aluminum plate base (HS7600)

Soft grip
provides more comfort

One-finger trigger switch

1

2

Aluminum diecast safety cover



Steel plate base (HS7000)

1 Rear dust exhaust port


exhausts sawdust backward only, preventing it from scattering around to provide comfortable operation.



Optional dust nozzle
Part No. 196843-7

2 Single action lever

for quick adjustment of cutting depth and bevel angle

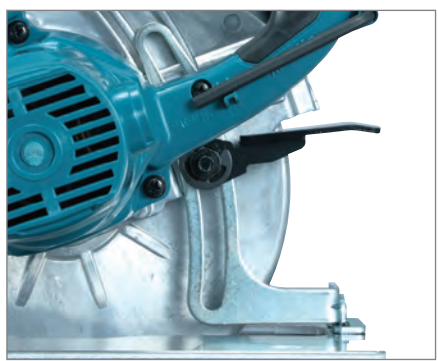

3 Flat Motor Housing Design

Increases stability when changing blades.


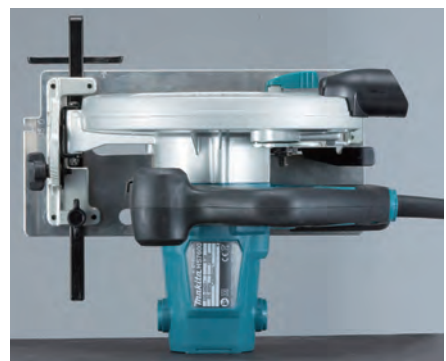


Photo : HS7000

Comparison of Efficiency (Cutting speed)

Note: Numbers in the chart below is relative values when the capacities of Predecessor Model is indexed at 100.

Test material: Melapi (60mm thick x 300mm long)
Bevel angle: 0 degree

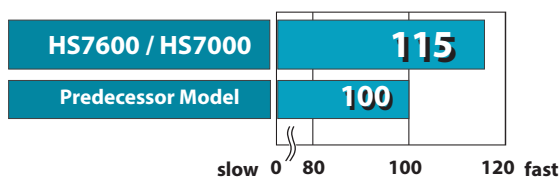

Circular Saw

HS7600 / HS7000 185mm (7-1/4") 303

- Double Insulation
- Dust Collecting

	HS7600	HS7000
Continuous rating Input	1,200W	1,200W
Max cutting capacity	at 0 degrees :	at 0 degrees :
	64mm (2-1/2")	65mm (2-9/16")
	at 45 degrees :	at 45 degrees :
	42mm (1-5/8")	43mm (1-11/16")
Blade diameter	185mm (7-1/4")	185mm (7-1/4")
No load speed (rpm)	5,200	5,200
Dimensions (LxWxH)	309x234x255	298x230x255
Net weight	(12-1/8"x9-1/4"x10")	(11-11/16"x9-1/16"x10")
Power supply cord	3.9kg (8.6lbs)	4.0kg (8.9lbs)
	2.5m (8.2ft)	2.5m (8.2ft)

Standard Equipment :
Carbide-tipped saw blade, Hex wrench, Rip fence (guide rule)

weight according to EPTA-Procedure 01/2003
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-BA