

Satisfy Professional's Needs

Makita[®]

Circular Saw
HS7600 185mm (7-1/4")

Smooth and powerful cutting



1,200W

Continuous rating input

Aluminum plate base (HS7600)

Soft grip provides more comfort

One-finger trigger switch

1

2

Aluminum diecast safety cover



3

Steel plate base (HS7000)



1 Reardust exhaust port

exhausts sawdust backward only, preventing it from scattering around to provide comfortable operation.

2 Single action lever



for quick adjustment of cutting depth and bevel angle

3 Flat Motor Housing Design

Increases stability when changing blades.




Optional dust nozzle Part No. 196843-7

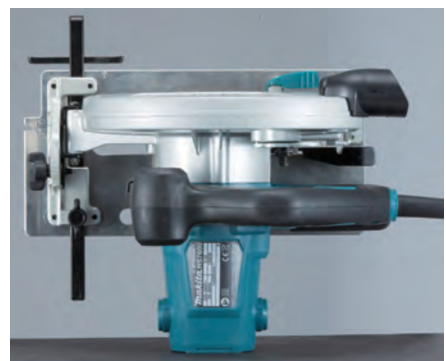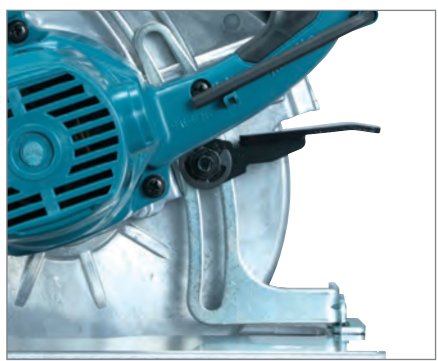

Comparison of Efficiency (Cutting speed)

Note: Numbers in the chart below is relative values when the capacities of Predecessor Model is indexed at 100.

Test material: Melapi (60mm thick x 300mm long)
Bevel angle: 0 degree

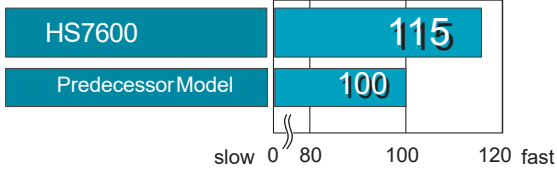

Circular Saw

HS7600 185mm (7-1/4")

303

Double Insulation	HS7600
Dust Collecting	HS7600
Continuous rating Input	1.200W
Max cutting capacity	at 0 degrees: 64mm (2-1/2") at 45 degrees: 42mm (1-5/8")
Blade diameter	185mm (7-1/4")
No load speed (rpm)	5.200
Dimensions (LxWxH)	309x234x255 (12-1/8"x9-1/4"x10")
Net weight	3.9kg (8.6lbs)
Power supply cord	2.5m (8.2ft)
Standard Equipment:	
Guide rule: 164095-8(1), Hex. wrench: 5 783217-7(1), TCT SAW: 185X40T D-81038(1)	

weight according to EPTA-Procedure 01/2003
Items of standard equipment and specifications may vary by country or area.



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in

