

Max. cutting capacity (height x width)

Cross Cut	Miter Cut (left & right)	Bevel Cut (left & right)	Compound Cut	Crown molding, 45 degree type	Baseboard (Skirt board)
92 x 382 3-5/8" x 15"	45° left/ right	45° left	Bevel 45° left 61 x 268 (2-3/8" x 10-1/2") Miter 45° left/ right 71 x 255 (2-13/16" x 10")	Upright cutting 203 (8")	Upright cutting 171 (6-3/4")
107 x 363 4-1/4" x 14-1/4"	60° left/ right	45° right	Bevel 45° right 44 x 268 (1-3/4" x 10-1/2") Miter 45° left/ right 54 x 255 (2-1/8" x 10")	Horizontal cutting 320 (12-5/8")	Horizontal cutting 416 (16-3/8")

Optional Accessories

Vertical vise assembly
Part No. 126617-2

Dust bag assembly
Part No. 122852-0

Stand
Part No. WST06

Horizontal vise assembly
Part No. 122470-4

Stand
Part No. 198688-9

Stand
Part No. WST05

Crown molding stopper set
Part No. 192628-9



Slide Compound Miter Saw

LS1219/ LS1219L 305 mm (12")

Double Insulation	LS1219/ LS1219L
Brake	Continuous rating input 1,800W
Constant Speed	Blade Diameter 305 mm (12")
Soft Start	Miter Angle 60° L / 60° R
Bevel Cutting 45° LR	Bevel Angle 48° L / 48° R
Dust Collection	Max Cutting Capacity 90°: 107 x 363 mm (4-1/4" x 14-1/4")
Laser Marker	45°: 107 x 255 mm (4-1/4" x 10")
	No Load Speed (RPM) 3,200
	Sound Pressure Level 91dB(A)
	Sound Power Level 100 dB(A)
	Vibration Level 2.5 m/s² or less
	Dimensions (L x W x H) 898x664x725 mm
	(35-1/4"x26-3/8"x28-1/2")
	Net weight LS1219: 29.3 kg (64.6 lbs)
	LS1219L: 29.5 kg (65.0 lbs)
	Power supply cord 2.5m (8.2ft.)

Standard Equipment : LS1219L : Dust bag assembly: 122852-0(1), Vise assembly: 126617-2(1), Triangular rule: 762001-3(1), Hex. wrench 6: 781044-6(1), Hex. wrench 2.5: 783208-8(1), TCT BLADE305X100T WOOD EFFICUT B-67474(1)



Slide Compound Miter Saw
LS1219/ LS1219L 305mm (12")

Single sliding system enables smooth operation to produce superior cuts

DXT



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in

High precision cutting




DXT

Diameter of slide pipe is changed from 25mm to 30mm. Moreover, by redesigning Arm section shape, the precision at bevel cutting is increased.



Integration of Guide fence and Lower fences provides the rigidity more than the separation structure.

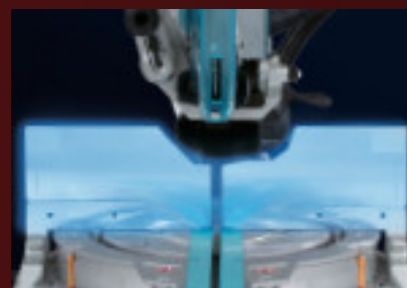

Rail-forward design enable to be placed against a wall for maximizing work space

Motor head slides on fixed pipes without extending machine rear end, so the machine can be placed close to wall.

Conventional model
needed to set apart from the wall




LS1219/LS1219L
can be placed close to wall



Excellent dust extraction

When cutting the low height workpiece, the dust extracting is more effective than current model because of the dual improved dust extracting port.

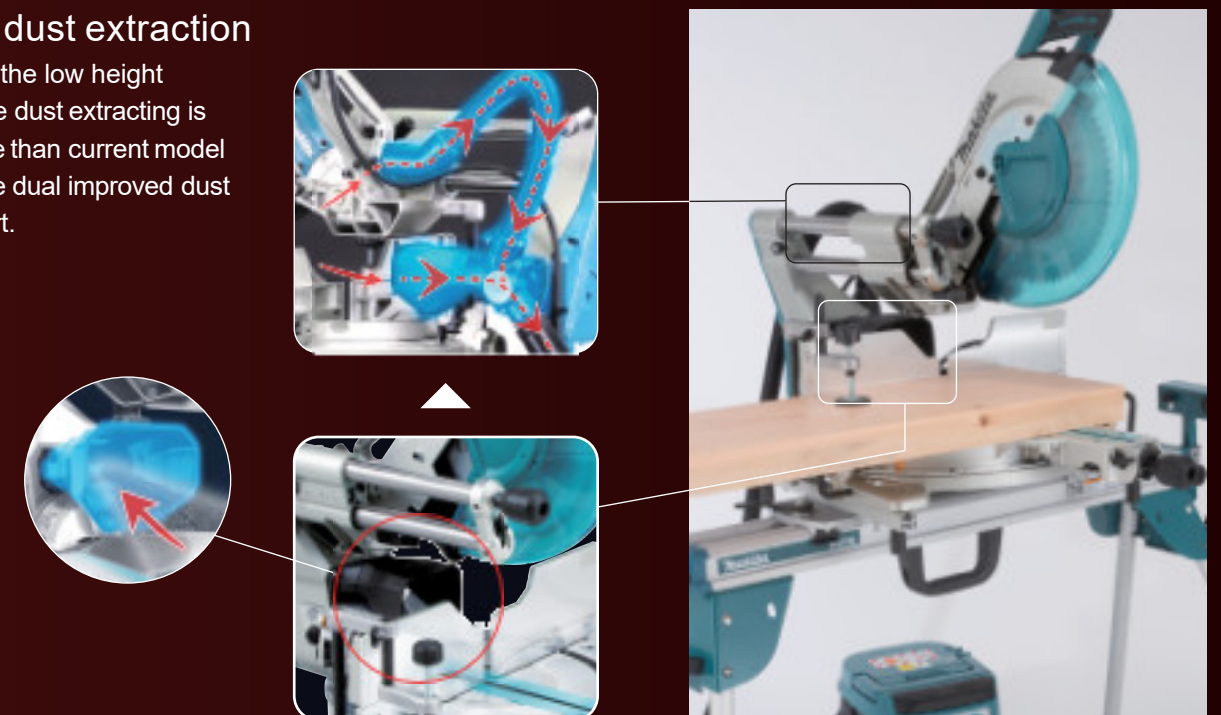


Large turn base

supports even large workpiece stably.

Easy-to-operate miter angle lock

Miter angle can be unlocked by turning Knob counterclockwise while pushing down Lock lever.

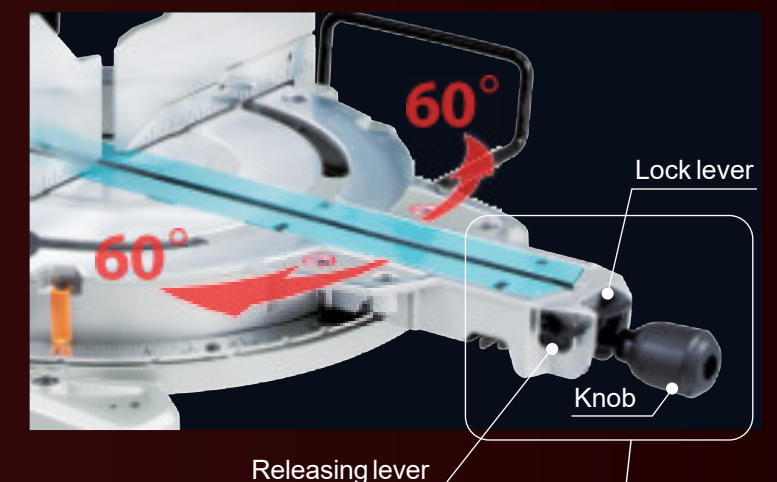

Once Releasing lever is pushed down:

- Turn base can be moved without pushing down Lock lever.
- The turning action is smooth because positive stops are released.
- Miters 0°-60° left and right, with positive stops at 0°, 15°, 22.5°, 31.6°, 45° and 60° (left and right)