
Satisfy Professional's Needs

Cordless Trimmer
RT001G 6 mm (1/4"), 8 mm (3/8")

Accessories


Easy-to-Customize

Trimmer base assembly with Square base plate



Convenient for cutting workpiece using guide rule, auxiliary wood fence

Offset base plate with Grip attachment & Grip



Convenient for cutting wide workpiece

Plunge base assembly with Side grip



Convenient for cutting while holding weight on one of the two handles of the base

Trimmer base with Grip attachment set




Convenient for trimming while holding two handles of the Trimmer base

Trimmer base assembly with Straight guide & Trimmer guide assembly




Plunge base assembly with Dust nozzle, Straight guide, Guide rail adapter set, Guide rail & Clamp set

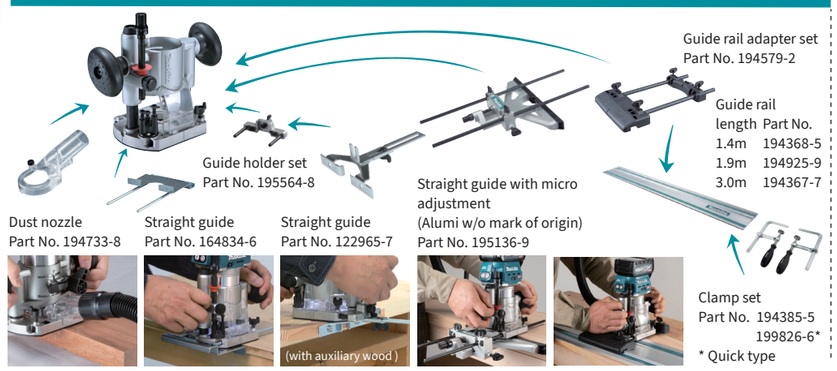


Templet guide

for Plunge base



A(mm)	B(mm)	C(mm)	Part No.
7.7	9.5	11.5	164379-4
9	11	13	164775-6
10	12	9	164388-3
11	12.7	13	164776-4
14	17	20	165366-6
14.5	16	13	193043-0
18	20	13	164393-0
22	24	13	165364-0
24	27	13	164470-8
25	29	15	163080-8
27	30	13	164471-6
37	40	13	165046-4
37	40	13	164472-4

for Trimmer base



A(mm)	B(mm)	C(mm)	Part No.
8	10	9.5	343577-5

Base plate

Trimmer base plate — Part No. 454842-8

Plunge base plate — Part No. 450819-1

Tilt base plate — Part No. 413150-6

Offset base plate — Part No. 413148-3

Collet cone



Size	Part No.
8mm	763618-5
6mm	763636-3
1/4''	763637-1

Charging Time

	DC40RA (Fast Charging)	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040 4.0Ah	45 min	67 min

*1 Recommended battery

Cordless Trimmer — RT001G 6 mm (1/4"), 8 mm (3/8")

- Variable Speed
- Brake
- Constant Speed
- Soft Start
- Dust Collection
- Built-in Job Light
- Carrying Case

Collet Size	*6/ 8 mm (1/4/ 3/8")*
No Load Speed (RPM)	*110,000 - 31,000*
Plunge Capacity	*w/ Trimmer Base: 0 - 40 mm (0 - 1-9/16")*
	w/ Plunge Base: 0 - 35 mm (0 - 1-3/8")
Vibration Level	*Rotation without Load: 2.5 m/s² or less*
Sound Pressure Level	*81 dB(A)*
Sound Power Level	*92 dB(A)*
Dimensions (L x W x H)	*w/ BL4020 / BL4025: 126 x 89 x 245 mm (5 x 3-1/2 x 9-5/8")*
	w/ BL4040: 141 x 89 x 251 mm (5-9/16 x 3-1/2 x 9-7/8")
Net weight	*2.2 - 2.5 kg (4.9 - 5.5 lbs.)*

Standard Equipment : RT001GZ14:Straight guide assembly: 122965-7(1), Dust nozzle:195559-1(1), Templet guide: 10 343577-5(1), Collet cone 8: 763618-5(1), Wrench 13: 781039-9(1), Wrench 22: 781043-8(1)

RT001GM207:Straight guide assembly: 122965-7(1), Dust nozzle:195559-1(1), Templet guide 10: 343577-5(1), Collet cone 8: 763618-5(1), Wrench 13: 781039-9(1), Wrench 22: 781043-8(1), Tray: 837247-1(1), Connector plastic case (type 4): 821552-6(1), Battery BL4040: 191B31-3(2), FAST CHARGER: DC40RA(1)

Makita Power Tools India Pvt. Ltd.
Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in

High Speed trimming 35%* UP





***Compared to predecessor model**

Cut a 1m long groove in Melapi at a depth of 6mm using ø6mm straight bit.

XGT 40Vmax Li-ion



BL MOTOR


BL motor delivers the power and performance for corded demands

Push button switch
Lock/unlock button
On/off switch button

Variable speed control
by dial

High durability and accuracy obtained
by using aluminum for body housing

Shaft lock
Flat-top design and provides stability for easier bit change.

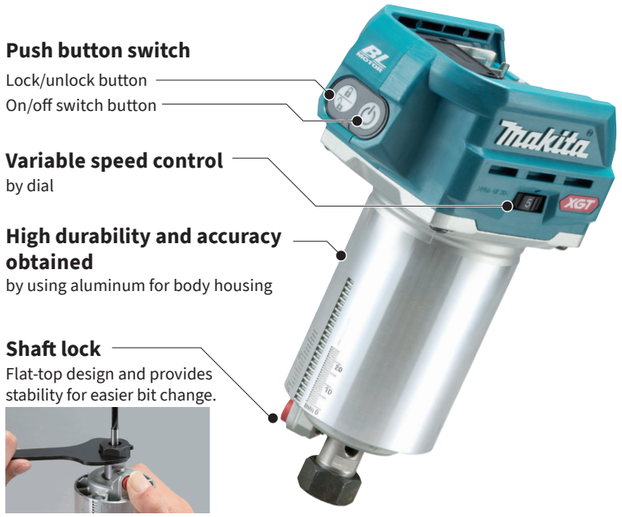

Twin LED job lights
illuminate cutting edge and increase visibility



Collet size
Accepts 6mm & 8mm collets, 1/4"collet.



Soft start
minimizes start-up shock and makes the tool start smoothly

AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth.
The vacuum cleaner automatically runs while the switch is on.




Wireless unit
is compatible with all supported tools

Bluetooth®

Constant speed control

minimizes the reduction in bit speed to provide stable trimming.

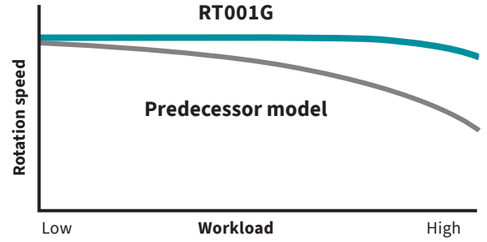

BRAKE

Electric brake (Soft-brake)
The gentle stop of the product reduces the damage to the work material due to the reaction of the stop.

XPT **eXtreme Protection Technology**

Easy-to-Customize



with Trimmer base

Round base for smooth and fast cutting with easy handling



Non-slip elastomer-covered body grip for increased operator comfort.



Precision cutting depth adjustment

Simple and efficient base lock system

High durability and accuracy obtained by using aluminum for trimmer base

Replaceable, non-marring plastic base plate for protection of trimmer base and smooth sliding on work surface



with Tilt base (option)

Ergonomic body grip easy-to-grasp with one hand
Tilting capacity: -30˚ to 45˚



Non-slip elastomer-covered body grip for increased operator comfort.



Precision cutting depth adjustment

Simple and efficient base lock system

High durability and accuracy obtained by using aluminum for base holder

Replaceable, non-marring plastic base plate for protection of plunge base and smooth sliding on work surface



with Plunge base (option)

Precision cutting depth adjustment
Plunge capacity: 0 - 35mm (0 - 1-3/8")



Ergonomically contoured knob style handles



Optional Fine adjusting straight guide can be used.



Easy-to-operate lock lever

Rubberized soft grip

3 stage cut depth adjustment

High durability and accuracy obtained by using aluminum for plunge base

Replaceable, non-marring plastic base plate for protection of plunge base and smooth sliding on work surface



with Offset base (option)

Stable trimming is possible with a bit set in offset position.
Able to cut close to a wall or corner-18.5mm at closest



Non-slip elastomer-covered body grip for increased operator comfort.

Simple and efficient base lock system

High durability and accuracy obtained by using aluminum for offset base

Replaceable, non-marring plastic base plate for protection of trimmer base and smooth sliding on work surface

