



Satisfy Professional's Needs

Chain Saw UC3041A/ UC3541A/ UC4041A



Photo: UC4041A

Tool-less saw chain/ tension adjustment

300mm (12") UC3041A/ 350mm (14") UC3541A/ 400mm (16") UC4041A

New adjustment lever for easier tool-less saw chain/ tension adjustment



Soft rear-handle

Easy-to-grip Front loop handle

The whole shape is firmly held, especially when the machine is tilted sideways.

Photo : UC3541A

1. extendable to allow for:

- Easier saw chain tightening
- Higher tightening torque

2. can be quickly retracted at any angle.

3. reduces the projections on Sprocket cover than ever.




Improved oil pump

keeps the delivery of chain oil constant regardless of temperature and the oil viscosity.



Large view window of Oil tank

allows operator to easily check oil level.

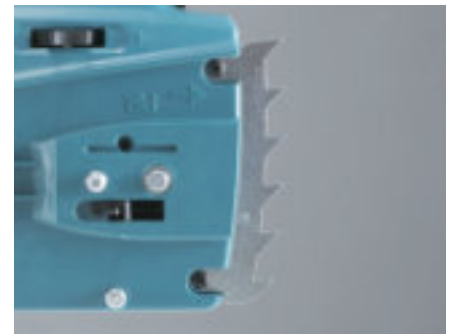

Large separate-type metal spike bumper

An optimum design has been achieved by employing separate-type. The spike grips workpiece firmly to provide more control.

Chain Saw

UC3041A 300mm (12"), UC3541A 350mm (14"), UC4041A 400mm (16")

153

- Double Insulation
- Brake
- Automatic Oiling
- Chain Brake
- Toolless Blade Change



Continuous rating input	1,800W
Chain speed per minute	870m/min (2,900ft/min)
Guide bar length	UC3041A: 300mm (12") UC3541A: 350mm (14") UC4041A: 400mm (16")
Chain blade	Pitch: 3/8" Gauge: 0.043" / 0.050"
Dimensions (L x W x H)	455x245x200mm (17-7/8"x9-5/8"x7-7/8")
Net Weight*	UC3041A: 4.6kg (10.1lbs) / 4.7kg (10.3lbs) UC3541A: 4.7kg (10.3lbs) / 4.8kg (10.5lbs) UC4041A: 4.7kg (10.5lbs) / 4.8kg (10.6lbs)
Power supply cord	0.3m (0.98ft)

Standard Equipment:

UC4041A: Hook complete: 158024-1(1), Guide bar: 165247-4(1), Saw chain 16: 191H03-4(1), Chain cover 419242-9(1)



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Konalur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in