



Optional Accessories

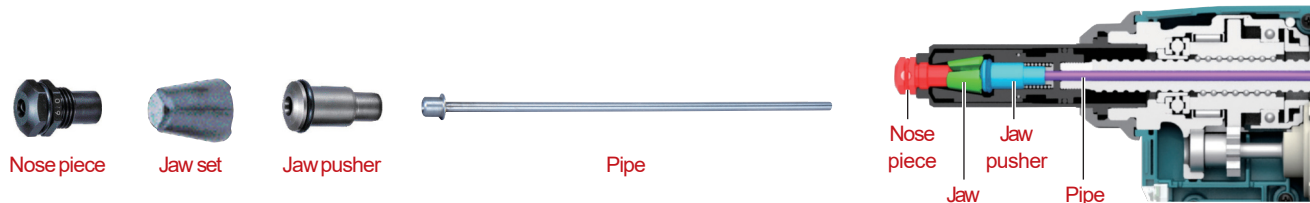

Model		DRV150 / DRV250				DRV250			
Rivet	Size	Ø2.4 (3/32")	Ø3.2 (1/8")	Ø4.0 (5/32")	Ø4.8 (3/16")	Ø4.0 (5/32")	Ø4.8 (3/16")	Ø6.0 (3/16")	Ø6.4 (3/16")
	Mandrel diameter: mm	Ø1.4-1.6	Ø1.8-2.1	Ø2.2-2.6	Ø2.6-3.2	Ø2.2-2.6	Ø2.6-3.2	Ø3.1-3.5	Ø3.5-3.9
Nose piece and Jaw pusher set *with pipe	Size	Ø2.4 (3/32")	Ø3.2 (1/8")	Ø4.0 (5/32")	Ø4.8 (3/16")	Ø4.0 (5/32")	Ø4.8 (3/16")	Ø6.0 (3/16")	Ø6.4 (3/16")
	Part No.	*199729-4	*199728-6	191C04-2	191C03-4	*191F80-4	*191F79-9	*199725-2	*191F78-1
Jaw set (3pcs set)	Size	4.8				6.4			
	Part No.	199731-7				199730-9			
Nose piece assy		127230-9	127229-4	127228-6	127225-2	127228-6	127225-2	127224-4	127223-6
Jaw pusher assy	Color / Size	Gray / 1.9	Black / 2.5	Gray / 3.1	Black / 3.6	Gray / 3.1	Black / 3.6	Gray / 4.0	Black / 4.5
	Part No.	127478-3	127477-5	127476-7	127475-9	127476-7	127475-9	127474-1	127473-3
Pipe	Color / Size	Silver / 2.3	Black / 2.8	Pipe is not necessary for operation. (DRV150)		Silver / 3.5	Silver / 4.2		Silver / 4.6
	Part No.	162747-5	162746-7			162745-9	162744-1		162743-3


Tool Protector

	For Nose	For Motor	Set
DRV150	422572-9	422571-1	191G65-6
DRV250	422573-7		191G66-4

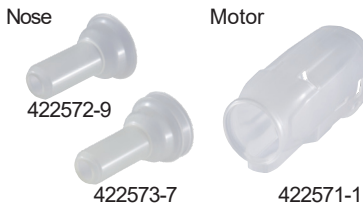

Battery Protector

BL1815N/ BL1820B
459937-2

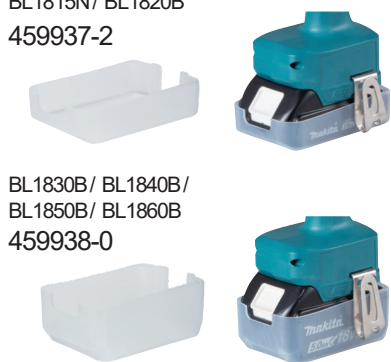

Greaseset (5g)

Jaw grease for maintenance
(Grease to jaw case & jaws)
Molybdenum disulfide grease
191D57-7



Hook
281012-4

Cordless Rivet Gun
DRV150 / DRV250

	DRV150	DRV250
Max pulling force	10 kN	20 kN
Length of Stroke	25 mm (1")	30 mm (1-3/16")
Center height	26 mm (1")	26 mm (1")
Sound Pressure Level	75 dB(A)	74 dB(A)
Vibration Level	2.5 m/s ² or less	2.5 m/s ² or less
Dimensions (L x W x H)	w/ BL1815N/ BL1820B: 310x80x270 mm (12-1/4"x3-1/8"x10-5/8") w/ BL1830B/ BL1840B/ BL1850B/ BL1860B: 310x80x287 mm (12-1/4"x3-1/8"x11-1/4")	w/ BL1815N/ BL1820B: 320x80x270 mm (12-5/8"x3-1/8"x10-5/8") w/ BL1830B/ BL1840B/ BL1850B/ BL1860B: 320x80x287 mm (12-5/8"x3-1/8"x11-1/4")
Net weight	1.9 - 2.2 kg (4.2 - 4.9 lbs.)	2.1 - 2.4 kg (4.6 - 5.3 lbs.)

Standard Equipment

DRV150Z : Accessory BS for 4.0: 1911U1-3(1), Accessory S for 3.2: 1911U4-7(1), Grease: 191D57-7(1), Accessory S for 2.4: 1911U6-3(1), Jaw 4.8: 199731-7(1) Hook: 346317-0(1)

DRV150RFE : Accessory BS for 4.0: 1911U1-3(1), Accessory S for 3.2: 1911U4-7(1), Grease: 191D57-7(1), Accessory S for 2.4: 1911U6-3(1), Jaw 4.8: 199731-7(1), Hook: 346317-0(1), Plastic case: 821755-2(1), Battery BL1830B: 197605-6(2), DC18RC FAST CHARGER DC18RC(1)

DRV250Z : Accessory BS for 4.8: 1911T9-0(1), Accessory S for 6.0: 1911V0-2(1), Grease: 191D57-7(1), Jaw 4.8: 199731-7(1), Hook: 346317-0(1)

DRV250RFE : Accessory BS for 4.8: 1911T9-0(1), Accessory S for 6.0: 1911V0-2(1), Grease: 191D57-7(1), Jaw 4.8: 199731-7(1), Hook: 346317-0(1), Plastic case: 821755-2(1) Battery BL1830B: 197605-6(2), DC18RC FAST CHARGER DC18RC(1)

	DC18RC	DC18RD	DC18SD
BL1815N 1.5Ah	15min	30min	
BL1820B 2.0Ah	24min	45min	
BL1830B 3.0Ah	22min	60min	
BL1840B 4.0Ah	36min	90min	
BL1850B 5.0Ah	45min	110min	
BL1860B 6.0Ah	55min	130min	



Cordless Rivet Gun
DRV150 / DRV250

Satisfy Professional's Needs



Easyplate joint



DRV150

[Compatible rivet diameter]
Ø2.4mm / 3.2mm /
4.0mm / 4.8mm



DRV250


[Compatible rivet diameter]
Ø4.8mm / 6.0mm / 6.4mm
Ø2.4mm / 3.2mm / 4.0mm
(use with optional Nosepiece, Jaw
pusher and pipe)



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Korlur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in





Insert rivet into the hole.




Pull trigger to tighten the rivet.



Jawcase designed to enable tight space operation

The short center height allows for tight space operation such as close-to-wall riveting.

Center height
26 mm

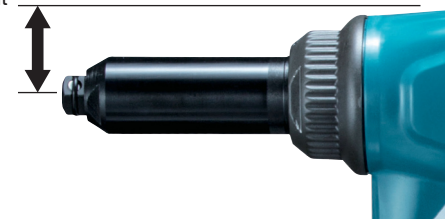

Rivet holding mechanism




Once a rivet is installed, it is held in place and do not drop out even when the tool is directed downward.
No need for holding the rivet by hand even in vertical down application

High speed riveting as same as pneumatic tools.



Twin LED job light
With pre-glow and afterglow functions



Compatible with various sizes of blind rivets

A wide range of nosepieces and jawpushers allow for tightening various sizes of blind rivets.

DRV150
[Compatible rivet diameter]
Ø2.4mm / 3.2mm / 4.0mm / 4.8mm

DRV250
[Compatible rivet diameter]
Ø4.8mm / 6.0mm / 6.4mm
Ø2.4mm / 3.2mm / 4.0mm
(use with optional Nosepiece, Jawpusher and pipe)



Transparent container for spent mandrels*
The amount of spent mandrels* can be checked.
* mandrel shaft broken off from a tightened rivet



Work amount on a full battery charge (approx)

2,300 rivets

Model: DRV150
Mandrel diameter: Ø4.8mm
Battery: BL1850B (5.0Ah)

DRV250: 2,000 rivets (5.0Ah)

BL MOTOR XPT