



Cordless Impact Driver DTD157



**Slim body
thanks to
compact BL motor**

Bit is option



Max Fastening Torque
140N·m





Bit is option

Anti-bit wobbling structure

- Two ball bearings are used to securely hold the anvil for reduced bit wobbling.
- Despite the internal design change for the rigidity, redesigned gear section makes the overall length 2mm shorter than Predecessor Model.

Slim body

Compact housing sizes around the motor allow for easy screwdriving in tight corners.



Best possible ergonomic handle for screwing applications



- A** In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened to perfectly fit the U-shape formed between user's thumb and index finger.
- B** Ribbed soft grip enables all finger tips to hold the handle securely against the strong rotational force of counter torque even in single-handed operation.

Aluminum hammer case

Twin LED job light



with preglow and afterglow functions

Variable speed switch




Belt clip

Impact power selection

Hard / Soft impact modes



A-mode (Assist mode) for controlled screwdriving

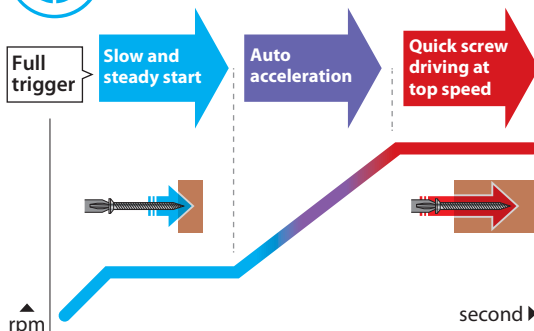

Accessories

Tool hanger

Part No.
191K57-9



BL MOTOR XPT

Charging Time

	DC18RC	DC18SD
18V LITHIUM-ION		
BL1815N 1.5Ah	15 min	30 min
BL1820B 2.0Ah	24 min	45 min
BL1830B 3.0Ah	22 min	60 min
BL1840B 4.0Ah	36 min	90 min
BL1850B 5.0Ah	45 min	110 min
BL1860B 6.0Ah	55 min	130 min

Cordless Impact Driver

DTD157

Variable Speed	Capacity	Machine Screw: M4 - M8 mm (5/32 - 5/16") Standard Bolt: M5 - M14 (3/16 - 9/16") High Strength Bolt: M5 - M12 (3/16 - 1/2") Coarse thread (in length): 22 - 90 mm (7/8 - 3-1/2")
Brake	Hex Shank	6.35 mm (1/4")
Reversing	No Load Speed (RPM)	Hard / Soft: 0 - 3,000 / 0 - 1,300
Electronic 2-Speed	Impacts Per Minute (IPM)	Hard / Soft: 0 - 4,100 / 0 - 2,000
Built-in Job Light	Max Fastening Torque	140 N·m (1,240 in.lbs.)
Carrying Case	Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 11.5 m/s ²
	Sound Pressure Level	95 dB(A)
	Sound Power Level	106 dB(A)
	Dimensions (L x W x H)	w/o Battery: 133 x 81 x 185 mm (5-1/4 x 3-3/16 x 7-1/4") w/ BL1830B / BL1840B / BL1850B / BL1860B: 133 x 81 x 232 mm (5-1/4 x 3-3/16 x 9-1/8")
	Net weight	1.2 - 1.5 kg

Standard Equipment:

DTD157Z: Hook 346317-0(1).
DTD157RTJ: Hook 346317-0(1), Connector plastic case (type 2) 821550-0(1), Inner tray 837670-0(1), Battery BL1850B (2), Fast Charger DC18RC(1).



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in