

**XGT**  
**40V Li-ion max**

40Vmax series



40Vmax mechanism



This movie was filmed in Japan. Models and specs may vary by country.

Satisfy Professional's Needs



**Makita**

**Cordless Rotary Hammer HR005G 40 mm (1-9/16")**

Adapted for SDS-MAX bits

**High Power**  
**Durability**



**XGT**  
**40V Li-ion max** **XGT X2**  
**80Vmax**

Rotary Hammer HR006G Demolition Hammer HM002G



**XGT**

**40V Li-ion max**

Impact energy [EPTA-Procedure 05/2009]

**8.0 Joule**

**Portable Power Pack**

**PDC01**

Powered by up to four 18V LXT batteries



**PDC1200**

Equipped with built-in battery cells

Charger: DC4001

Charging time: 6hours



**Adapter (40Vmax)**

Part No. 191N62-4



**Accessories**

**Dust Extractor Attachment**

**Drilling / Hammering**

Part No. 199142-6

**Drilling mode**



**Hammering mode**




**Hammering**

without Vacuum hose

Part No. 199143-4

with Vacuum hose

Part No. 199144-2

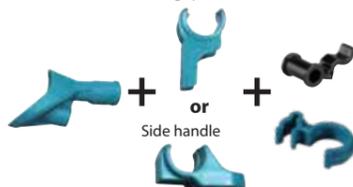

**Cordless Rotary Hammer**

**HR005G 40 mm (1-9/16") Adapted for SDS-Max bits**

Variable Speed	<b>Impact Energy</b> EPTA-Procedure 05/2009: 8 J
Brake	<b>Capacity</b> Concrete (w/ TCT Bit): 40 mm (1-9/16")
Adapted for SDS-MAX bits	<b>Blows Per Minute (BPM)</b> 1,450 - 2,900
Torque Limiter	<b>No Load Speed (RPM)</b> 250 - 500
Constant Speed	<b>Sound Pressure Level</b> 91 dB(A)
Soft Start	<b>Sound Power Level</b> 102 dB(A)
Dust Collection	<b>Vibration Level</b> Hammer Drilling into Concrete: 5.0 m/s <sup>2</sup>
Built-in Job Light	Chiselling Function w/ Side Grip: 4.0 m/s <sup>2</sup>
Carrying Case	Chiselling Function w/ Side Handle: 4.0 m/s <sup>2</sup>
	<b>Dimensions (L x W x H)</b> w/o Battery: 477 x 115 x 286 mm (18-3/4 x 4-1/2 x 11-1/4")
	w/ BL4040: 500 x 115 x 286 mm (19-3/4 x 4-1/2 x 11-1/4")
	w/ BL4050F: 520 x 115 x 305 mm (20-1/2 x 4-1/2 x 12")
	<b>Net weight</b> 7.4 - 8.2 kg (17.0 - 18.1 lbs.)
	<b>Standard Equipment:</b>
	HR005GZ: Side grip assembly 123138-5(1), Grease vessel 194683-7(1), Side handle 73 196792-8(1), Depth gauge 331955-1(1), Plastic case 821837-0(1).
	HR005GM201: Side grip assembly 123138-5(1), Grease vessel 194683-7(1), Side handle 73 196792-8(1), Depth gauge 331955-1(1), Plastic case 821837-0(1), Battery BL4040 191B31-3(2), Fast Charger DC40RA(1).

**As powerful as AC tools**

**Net weight**

**7.7 kg**

with BL4040



Impact energy  
[EPTA-Procedure 05/2009]  
**8.0**  
Joule

diameter 32mm (1-1/4") / Drilled holes to a depth of 140 mm / Concrete with compressive strength of 40N/mm<sup>2</sup>



## Anti-Vibration Technology

**AVT** Vibration level at main handle  
**5.0 m/s<sup>2</sup>**

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.




**SOFT NO LOAD**




## AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.

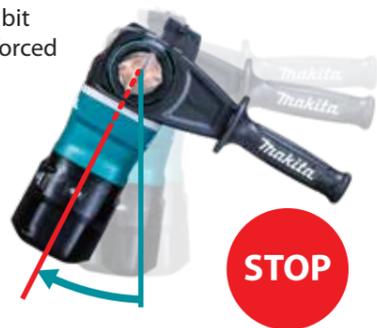

## AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

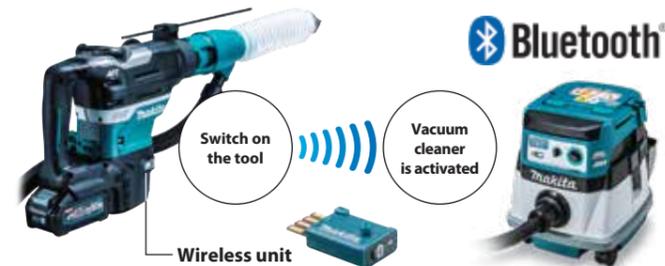

## XPT eXtreme Protection Technology

Technology



Type

Side grip



Side handle



**BL MOTOR**