



Angle Grinder

GA5080R 125mm (5")



Just One Click



PULL

Pull & Release

RELEASE

XLOCK

Quick and Easy Wheel Change System

Snap-in in a second



PUSH

CLICK

Continuous Rating Input

1,400 w

GA5080R:

with Anti-restart function


XLOCK

Quick and easy wheel change

X-LOCK



Just one click to attach the accessories
easy removal just simply pull the lever

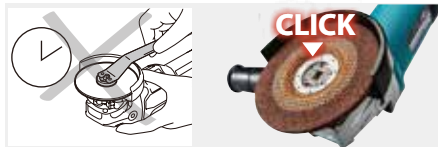

No downtime
of installing and removing the accessories.
Improve your work efficiency and work environment




No tool required
X-LOCK mechanism ensures that the accessory is properly mounted to the tool even without nut, flange, and spanner.



No over-tightening
X-LOCK accessories are firmly attached and cannot be mounted incorrectly.



No scratching workpiece
by nuts even when flat grinding.

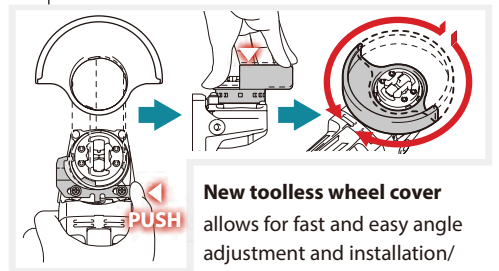

New toolless wheel cover
allows for fast and easy angle adjustment and installation/removal of wheel cover.



Function of LED light
GA5080R only



Solid Green indicates that
the tool is ready to work.



Anti-restart function
prevents accidental startup
Even if plugged in with the switch "ON", the tool does not start with a blinking red light for visual warning.

Accessories

Dust Collection wheel guard

for Diamond wheel
Part No. 191G05-4



Wheel cover

for abrasive cut-off wheel
Part No. 162708-5
Part No. 140U29-1 (for US)




Anti-vibration grip

Part No. 194514-0



Dust cover attachment set

Part No.
193903-6



125mm X-LOCK wheels

125mm X-LOCK accessories are compatible with conventional angle grinders.

Grinding wheel / Metal

Part No. E-00393(EN)



Thin Cut-off wheel (Flat)

Part No. E-00418(EN)



Grinding wheel / Stainless

Part No. E-00402(EN)



Diamond wheel / concrete

Part No. E-02076



Angle Grinder

GA5080 / GA5080R 125 mm (5")

318 mm

- Double Insulation
- Constant Speed
- Soft Start
- Dust Collection

Standard Equipment:

Depressed Center Wheel,
Side Grip, Wheel Cover

Continuous rating input	1,400W
Wheel Diameter/ Hole Diameter	125 mm (5") / 22.3 mm (7/8")
Max Cutting Depth	31 mm (1-1/4")
No Load Speed (RPM)	12,000
Vibration Level	Surface Grinding w/ Normal Side Grip: 7.5m/s ²
Sound Pressure Level	84dB(A)
Sound Power Level	95dB(A)
Dimensions	309 x 141 x 113 mm
(L x W x H)	(12-1/8 x 5-9/16 x 4-7/16")
Net weight	2.5 - 3.6 kg (5.5 - 7.9 lbs.)
Power supply cord	2.5 m (8.2 ft)

The weight may differ depending on the attachment(s), including the battery cartridge.

The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk,
Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007
Email: info@makita.in Website: www.makita.in