



Portable Power Pack

PDC01

Powered by up to four 18V LXT batteries



PDC1200

Powered by 36V-40Vmax built-in battery



Charger: DC4001

Adapter set (40Vmax)

Part No. 191N62-4



Adapter between Battery box of
Portable power pack and Product
on 40Vmax XGT platform

Accessories

Trimmer head

Part No. 196324-1
Cord/Line : 2.4mm x3.6m
Ref. : UN-74L



Part No. 197296-3
Cord/Line : 2.0mm x3m
Ref. : ECO 4L



Part No. 191D89-4

Cord/Line : 2.0mm x4m
Ref. : 96-M10L



Part No. 198892-0

198893-8 (EU)
Cord/Line : 2.0mm x3m
Ref. : 95-M10L



Part No. 197804-0

197993-1 (EU)
Cord/Line : 2.4mm x3m
Ref. : 95-M10L




Four-leaf Spiral Nylon cord

Green	Size	Part No.	Orange	Size	Part No.
	2.0mmx15m	197472-9		2.4mmx15m	198501-1
	2.0mmx30m	197473-7		2.4mmx30m	198502-9
	2.0mmx160m	197474-5		2.4mmx120m	198503-7
	2.0mmx280m	197475-3		2.4mmx180m	198504-5

Shoulder strap assembly

Comfort
Part No.122906-3



Single
Part No.127508-0



Plastic blade (255mm)

Plastic blade Set
Part No. 198383-1
with nut
M10x1.25 LH



Replacement plastic blade
Part No. 198426-9
12pcs. set



Brushcutter blade

3-tooth blade
Part No. 195298-3
Blade dia. : 230mm
Thickness : 3.0mm



4-tooth blade
Part No. 195150-5
Blade dia. : 230mm
Thickness : 1.8mm



Protection guard for brush cutting blades

Exclusive
Part No. 197294-7



Charging Time Reference

	DC40RA	DC40RC
40V^{Li-ion}max		
BL4020 2.0Ah	22min	30min
*BL4025 2.5Ah	28min	38min
*BL4040 4.0Ah	45min	67min
*BL4050F 5.0Ah	50min	85min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.

The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Cordless Grass Trimmer

UR002G / UR003G

Variable Speed	Cutting Width	Metal Blade: 230 mm (9") Nylon Cutting Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
Brake	No Load Speed (RPM)	High / Mid / Low: 0 - 6,500 / 5,300 / 3,500
Reversing	Spindle Size	M10 x 1.25 LH
Electronic 3-Speed	Sound Power Level	Nylon Cutting Head: 89.7 dB(A)
Constant Speed	Sound Pressure Level	Nylon Cutting Head: 72.2 dB(A)
Soft Start	Vibration Level	Left / Right: 2.5 / 2.5 m/s ² or less
	Dimensions (L x W x H)	w/o Cutting Tool, w/ BL4020 / BL4025 / BL4040: UR002G: 1735 x 630 x 500 mm (68-1/4 x 24-3/4 x 19-3/4") UR003G: 1735 x 355 x 230 mm (68-1/4 x 14 x 9")
	Net weight	UR002G: 4.6 - 5.2 kg (10.1 - 11.5 lbs.) UR003G: 4.1 - 4.7 kg (9.0 - 10.4 lbs.)

Standard Equipment : UR002GZ - Band assembly 122906-3(1); Trimmer head assembly 98-M10L 1915D8-4(1);
Box driver 16-17 783013-3(1); Hex. wrench 4 783202-0(1)

Wet Guard

photo: UR002G

Net weight

5.2 kg

model: UR002G
battery: BL4050F

High power as 25mL engine tool



BL MOTOR

Outer Rotor BL Motor provides high operating efficiency

Constant speed

Aluminum motor housing


Direct drive system
for more power, more speed and longer run time

High rotation speed
6,500 min⁻¹

ADT

Automatic torque Drive Technology


Automatically changes the cutting speed according to grass density.

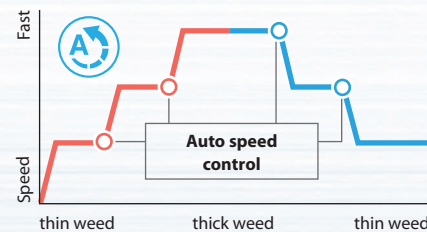

AFT

Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

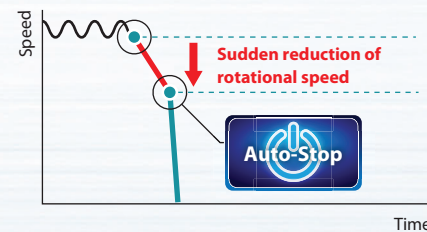


The vertical center line of the handle bar always stays aligned with that of user (UR002G only)




- enabling user to work with less fatigue even in long continuous operation.
- allowing for a wider swing.

Multi functional control panel: near right hand position for easy access and operation

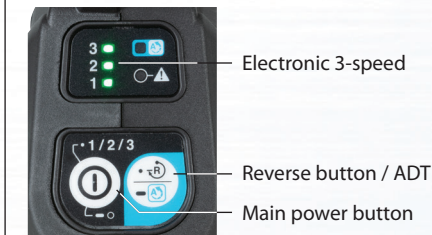

Operation mode can be selected to suit the type of blade.

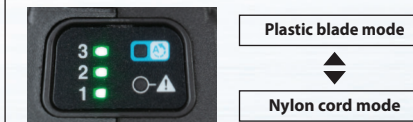

Large push button main power switch
allows for easy on/off even with gloved hand.

Work amount

on a single full battery charge

about
290 m²

Battery: BL4050F

Work amount depends on the condition of battery, the type of grass, season, etc.

Run Time*

Nylon cutting head

High	Med	Low
45	80	259
min with BL4050F		

*on a single full battery charge / No load

Reverse switch



Reverse switch for clearing entangled weeds and grass from cutting head

Toolless handle lock mechanism for good portability



WG
WET GUARD



High water-resistance allows to operate the machine even if it is wet with water.

XPT

eXtreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather

UR002G

Offset bike Handle



UR003G

Loop-Handle

