



Powered by 36V-40Vmax built-in battery

Charger: DC4001

Part No. 191D89-4

Cord/Line : 2.0mm x4m

Part No. 191D91-9

Cord/Line : 2.4mm x3m

Four-leaf Spiral Nylon cord

Green

Size

Ref.: 96-M10L

Ref. : 96-M10L

PDC1200

Part No. 197296-3

Cord/Line : 2.0mm x3m

Ref. : ECO 4L

40Vmax mechanism movie

ΠŰ

Adapter set (40Vmax)

Adapter between Battery box of Portable power pack and Product

Part No. 198893-8 (EU)

Orange

Part No.

Size

Cord/Line : 2.0mm x3m

Ref.: 95-M10L

Part No.

on 40Vmax XGT platform

Part No. 191N62-4

This movie was filmed in Japan. Models and specs may vary by country.

Portable Power Pack

PDC01

Powered by up to four 18V LXT batteries



Accessories

Trimmer head Part No. 196324-1

Cord/Line : 2.4mm x3.6m Ref. : UN-74L Part No. 198266-5

Ref.: UN-72L

Cord/Line : 2.4mm x6m

Brushcutter blade

For UR006G / UR007G

		2-tooth blade	3-tooth blade	4-tooth blade
	Blade dia	Nikila		
	230mm	197997-3	195298-3	195150-5
_	255mm	198345-9	195299-1	196895-8

Plastic blade

	Cutting width	Plastic blade Set	Replacement plastic blade
-	255mm	198383-1	198426-9
-	305mm	199868-0	199870-3

Charging Time Reference

	DC40RA	DC40RC	
40Vmax	Fast Charging		
BL4020 2.0Ah	22min	30min	
*1 BL4025 2.5Ah	28min	38min	
*1 BL4040 4.0Ah	45min	67min	
*1 BL4050F 5.0Ah	50min	85min	
*1 Recommended battery			

	4-loolii biaue					
			2.0mmx15m	197472-9	2.4mmx15m	198501-1
			2.0mmx30m	197473-7	2.4mmx30m	198502-9
			2.0mmx160m		2.4mmx120m	
	195150-5		2.0mmx280m	197475-3	2.4mmx180m	198504-5
		Protection gu	ard for brush	cutting l	olades	
	196895-8	Part No. 191B54-1		Part N	No. 191B55-9	
	l	UR006G / UR007G		UR00	8G	
					6	~
m	ent plastic blade					
		Shoulder stra	p assembly			
All and the second s		Comfort			Single	
198426-9		Part No.122906-3	X		Part No.127759-	5
199870-3		from	nt ba	ack	Trak	ita
			U	Ø		
Cordless Grass Trimmer						
UR006G / UR007G / UR008G						
	20				000000 ()	

	Variable Speed	Cutting Width	Metal Blade: 255 mm (10") (UR006G / UR007G only)
	Valiable Speed	-	Nylon Cutting Head: 430 mm (17")
	Marake		Plastic Blade: 305 mm (12")
•		No Load Speed (RPM)	Metal Blade (3 / 2 / 1): 0 - 7,000 / 0 - 5,500 / 0 - 4,600
0min	Reversing		Nylon Cutting Head (3/2/1): 0 - 5,500/0 - 5,000/0 - 4,600
	Keversing		Plastic Blade (305 mm) (3 / 2 / 1): 0 - 7,000 / 0 - 5,500 / 0 - 4,600
	Electronic 3-Speed	Spindle Size	M10 x 1.25 LH
8min	Electronic 3-Speed	Dimensions (L x W x H)	w/o Cutting Tool, w/ BL4050F:
	Constant Speed		UR006G: 1,840 x 681 x 563 mm (72-1/2 x 26-3/4 x 22-1/4")
	Constant Speed		UR007G: 1,840 x 400 x 269 mm (72-1/2 x 15-3/4 x 10-5/8")
7.			UR008G: 1,828 x 227 x 301 mm (72 x 8-15/16 x 11-7/8")
7min	Soft Start	Net Weight	UR006G: 5.6 - 6.2 kg (12.3 - 13.7 lbs.)
		-	UR007G: 5.2 - 5.8 kg (11.5 - 12.9 lbs.)
_			UR008G: 5.0 - 5.6 kg (11.0 - 12.4 lbs.)
5min			
	Standard Equipment : Sa	fety Goggles, Metal Blade (UR	006G / UR007G) / Nylon Cutting Head / Plastic Blade (country-specific), Blade

Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver (UR006G / UR007G), Shoulder Belt, Battery, Charger


The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation 3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan PRINTED IN JAPAN 202105





As powerful as 30cc petrol grass trimmer

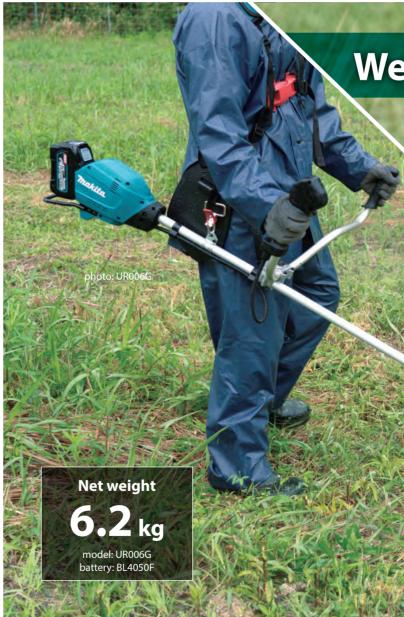







Wet Guard



High power as 30cc engine tool







eXtreme Protection Technology Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather





Rear end mounted motor Makes the tool weight balance similar to engine grass trimmers, enabling user to easily lift up the saw head for ridge weed removal, etc.




Toolless handle lock mechanism for

good portability (UR006G only)

ADT

Automatic torque Drive Technology

Automatically changes the cutting speed according to grass density.



The vertical center line of the

handle bar always stays aligned

with that of user (UR006G only)

• Enabling user to work with less fatigue

even in long continuous operation.

• Allowing for a wider swing.



New tool-less quick fastening

Compatible with two-piece handle bar


independently adjustable without tool.

• Each handle-to-shaft angle is

handle holder

(UR006G only)

Torque limiter turns the motor off if the tool is suddenly forced to lock



UR007G


Loop-Handle


UR008G Loop-Handle

Nylon Cutting Head and Plastic Blade only











Active Feedback sensing



 $\mathbf{0}$



Reverse switch for clearing entangled weeds and grass from cutting head

Max Output


1.0 kw

Electronic 3-speed

Multi functional control panel: near right hand position for easy access and operation

Reverse button / ADT

Aain power button



allows for easy on/off even with gloved hand.

UR006G Offset bike Handle

Cutting width: 430mm (17")

similar to 30mL class engine grass trimmers.

Protector (UR006G / UR007G)

- Dual-purpose protector, Nylon cutting head can be used by attaching Extension.
- Cutting width: 255mm with Metal blade 430mm with Nylon cutting head



Protector (UR008G)

• Designed exclusively for use with Nylon cutting head. Narrow design for wide working field Cutting width: 430mm

Run Time* Nylon cutting head Med High Low **12 / 24 / 38** min with BL4050F

*on a single full battery charge / No load