



photo:UA004G



photo:UA003G

Optional Accessories

Guide bar / Sawchain / Guide bar cover

Guide Bar

Saw Chain

Bar Cover

Drive sprocket

Cutter type: CC:Chamfer chisel

Guide Bar				Saw Chain						Bar Cover	Drive sprocket			
Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No.	Part No.	Type	Part No.		
25cm/10"	A041	Sprocket nose bar	191G14-3	40	1.1mm/ .043"	3/8"LP	90PX	OC	191H00-0	458501-6	Sprocket 3/8"LP	226992-7		
30cm/12"			191G15-1	46					191H01-8	419288-5				
25cm/10"			191G22-4	40	1.3mm/ .050"		91PX		191H08-4	458501-6				
30cm/12"			191G23-2	46					191H10-7	419288-5				

Band assembly set PartNo. 191K37-5

The weight of the tool can be distributed on shoulders for reduced operator fatigue.



Portable Power Pack

PDC1200

Powered by 36V-40Vmax built-in battery



PDC01

Powered by up to four 18V LXT batteries



Adapter set

Part No. 191N62-4



Charging Time

	Fast Charging	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min	
BL4025 2.5Ah	28 min	38 min	
*1BL4040 4.0Ah	45 min	67 min	
*1BL4050F 5.0Ah	50 min	85 min	

*1 Recommended battery

Cordless Pole Saw	UA001G 250 mm (10")	UA003G 300 mm (12")
Cordless Telescopic Pole Saw	UA002G 250 mm (10")	UA004G 300 mm (12")

	UA001G / UA003G	UA002G / UA004G
Variable Speed	UA001G: 250 mm (10") UA003G: 300 mm (12")	UA002G: 250 mm (10") UA004G: 300 mm (12")
Saw chain	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)	0 - 20.0 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL	160 mL
Dimensions (L x W x H)	2,230 x 156 x 187 mm (88 x 6-1/8 x 7-3/8")	2,516 - 3,748 x 156 x 187 mm (99 - 147-1/2 x 6-1/8 x 7-3/8")
without guidebar and Battery or with Battery BL4040	UA001G: 2,470 x 156 x 192 mm (97-1/4 x 6-1/8 x 7-9/16")	UA002G: 2,765 - 3,997 x 156 x 192 mm (109 - 157-1/2 x 6-1/8 x 7-9/16")
with guidebar, Saw chain and Battery BL40450F	UA003G: 2,526 x 156 x 192 mm (99-1/2 x 6-1/8 x 7-9/16")	UA004G: 2,812 - 4,044 x 156 x 192 mm (110-1/2 - 159 x 6-1/8 x 7-9/16")
Net weight	UA001G: 6.0 - 7.2 kg (13.2 - 15.9 lbs.) UA003G: 6.1 - 7.4 kg (13.4 - 16.3 lbs.)	UA002G: 7.7 - 8.9 kg (17.0 - 19.6 lbs.) UA004G: 7.8 - 9.1 kg (17.2 - 20.1 lbs.)

Standard Equipment : UA004GZ: Guide bar 12: 191G15-1(1), Saw chain 12: 191H01-8(1), Band assembly: 191K37-5(1), Oil vessel: 199897-3(1), Chain cover: 419288-5(1), Cap 24: 424434-7(1), Hex. wrench 4: 783202-0(1), Cap 28: 422596-5(2)
UA004GM101: Battery BL4040: 191B31-3(1), Guide bar 12: 191G15-1(1), Saw chain 12: 191H01-8(1), Band assembly: 191K37-5(1), Oil vessel: 199897-3(1), Chain cover: 419288-5(1), Cap 24: 424434-7(1), Hex. wrench 4: 783202-0(1), Cap 28: 422596-5(2), FAST CHARGER: DC40RA(1)



Cordless Pole Saw series
UA001G / UA002G 250mm (10")
UA003G / UA004G 300mm (12")

Satisfy Professional's Needs



High power
X
Long reach
II
High efficiency



photo:UA002G

250mm (10")


UA001G Fixed length

UA002G Telescopic

300mm (12")

UA003G Fixed length

UA004G Telescopic

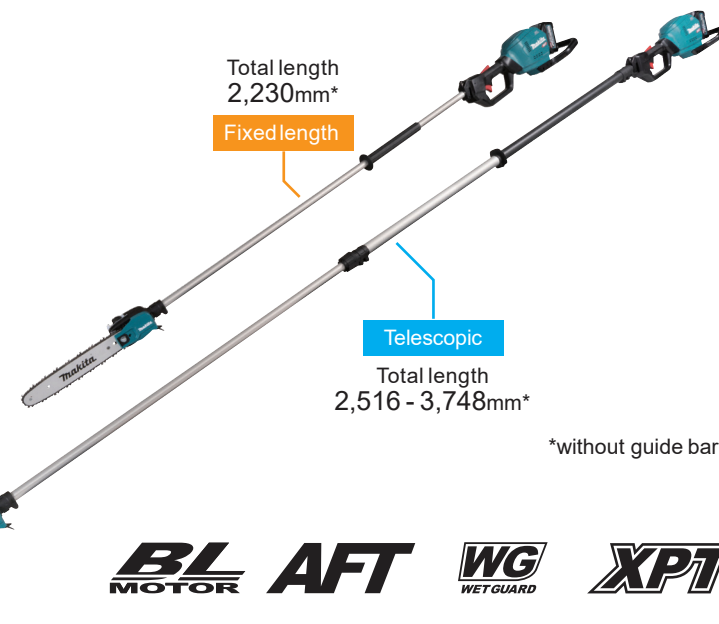

Total length 2,230mm*

Fixed length

Telescopic

Total length 2,516 - 3,748mm*

*without guide bar

No load chain speed

20.0m/s



*Saw head weight
0.7kg

Excellent tool balance

The motor is located in the battery housing at the bottom of the tool. This bottom-mounted motor reduces the saw head weight, allowing for:

- Easy to control the saw head for easy access to a desired cutting position
- Reduced user fatigue and stress

*without guide bar, saw chain and oil

Telescopic pole
(UA002G / UA004G only)
Tool-less pole extension and fixing for easy adjustment of pole length

BL MOTOR High operating efficiency

High power BL motor delivers the same or higher operation efficiency than 35mL class engine models.

AFT Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

Retractable oil tank cap knob decreases the chance that the saw head will be snagged in branches.

Slim saw head
The same slim design as engine pole saws provides easy maneuverability into branches.

Saw head width
87mm

Chain oil tank with high transparency allows to easily check the amount of remaining oil.

Maximum total length
3,748mm

Shortest total length
2,516mm

Telescopic

Fixed length

Anti-fall captive nut

Integrated branch hook convenient for removing cut branches from trees

XPT / WG / IPX4
WET GUARD

250mm (10")	300mm (12")
UA001G Fixed length	UA003G Fixed length
UA002G Telescopic	UA004G Telescopic

Battery guard also can be used as an auxiliary grip.