


High Power
Durability
Digital
Communication



■ Cordless Pin Nailer Series

DPT353

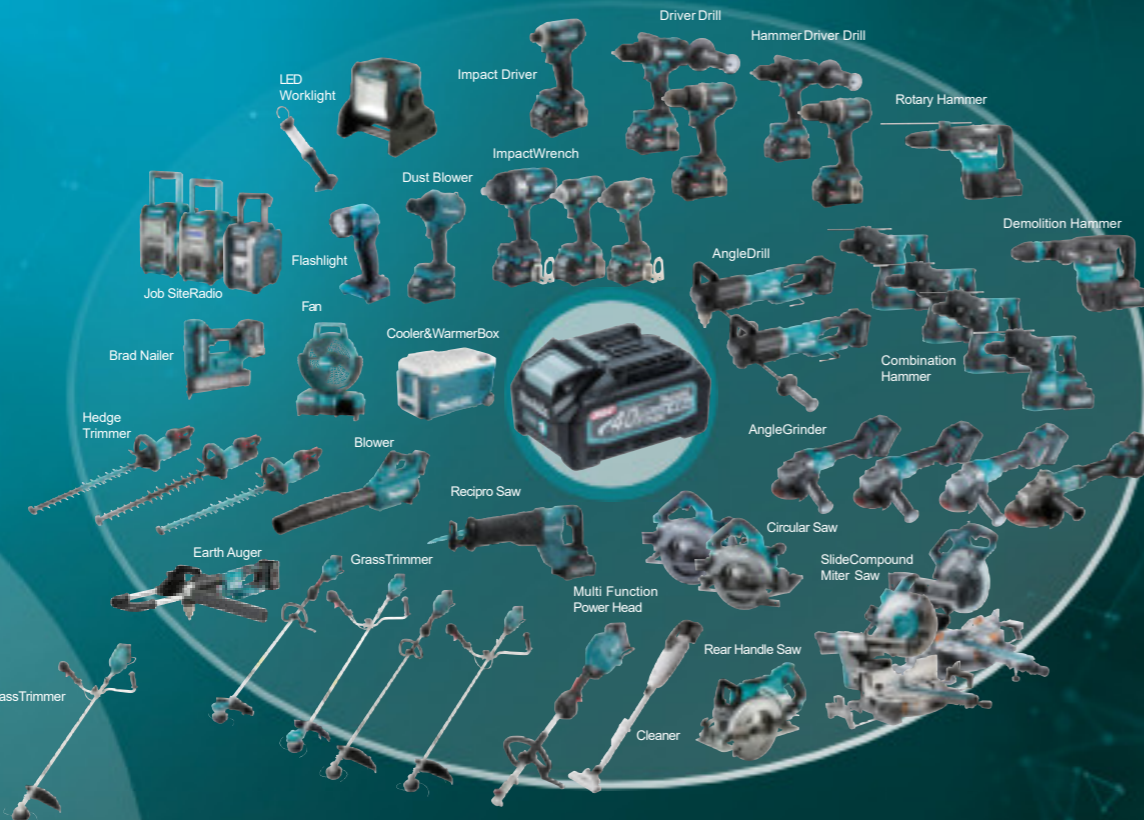

PT354D



■ Optional Accessories

Nose adapter
Part No. 422872-7
Nose adapter for flat nailing



■ Charging Time

	Fast Charging	
	DC40RA	DC40RC
*1BL4020 2.0Ah	22 min	30 min
*1BL4025 2.5Ah	28 min	38 min
BL4040 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Pin Nailer		
PT001G		
Depth Adjustment	Capacity	Length: 15, 18, 25, 30, 35 mm (5/8, 11/16, 1, 1-3/16, 1-3/8") Dia.: 0.6mm (1/32") Gauge: 23 Ga
Auto Firing Stop	Magazine Capacity	120
Built-in Job Light	Approx. work volume on a full battery charge	6,000
Carrying Case	Vibration Level	2.5 m/s ² or less
	Sound Pressure Level	79 dB(A)
	Dimensions(L x W x H)	w/ BL4020/ BL4025: 265 x 86 x 226 mm (10-3/8 x 3-3/8 x 8-7/8")
	Net weight	2.4 - 3.0kg (5.3 - 6.6 lbs.)

Standard Equipment : PT001GZ: Hook: 346317-0(1), Hex. wrench 3: 783201-2(1), Nose adapter: 422844-2(2)

PT001GD101: Battery BL4025:191B41-0(1), Hook: 346317-0(1), Hex. wrench 3: 783201-2(1), Plastic case: 821834-6(1), Inner tray: 835V71-8(1), Nose adapter: 422844-2(2), DC40RA.FAST CHARGER DC40RA(1)

Work volume on a single full battery charge about **6,000** shots
Battery: BL4025

Quick firing thanks to BL motor



BL MOTOR

Firing quickness

about **20% UP**

Use of BL motor and redesigned driving spring shortens the time required to compress and release the spring, providing drastically quicker firing.

PT001G	120
Predecessor Model 18V	100

slow Firing quickness fast

Beautiful finish



Improved Driver durability

achieved by redesigning the shape of the driver tip and reducing thin places.



Low recoil mechanism

- enables easy nailing of long pins without pushing down the pin nailer firmly.
- achieves high-quality finish nailing.



Nosetip (with Nose adapter)

thickness **4 mm**



Fires both vertically and horizontally

Nails can be fired in the groove of baseboard.



Work volume on a single full battery charge about **6,000** shots
Battery: BL4025

Pin nails
Diameter **Ø0.6mm**
Length
15/18/25/30/35 mm

Compact & Lightweight



Contact arm mechanism

enables "continuous nailing" and "drag nailing".
[If the nosetip isn't pressed to a workpiece, the trigger cannot be pulled.]



Ergonomically designed grip




Single LED job light



with pre-glow and after-glow functions

Driving depth adjustment by dial



- Able to drive up to 35mm pin nails
- Anti-dry fire mechanism

XPT



eXtreme Protection Technology