

High Power  
Durability  
Digital  
Communication



**XGT**  
**40V<sup>Li-ion</sup>max** **XGT X2**  
**80V<sup>Li-ion</sup>max**



### Optional Accessories

Tool hanger set

Part No. 191F58-7

Enable to hook the machine quickly on a snap hook of waist belt, to prevent the machine from falling.



### Charging Time

|                 | Fast Charging<br>DC40RA | DC40RC  |
|-----------------|-------------------------|---------|
| *1 BL4020 2.0Ah | 22 min                  | 30 min  |
| *1 BL4025 2.5Ah | 28 min                  | 38 min  |
| *1 BL4040 4.0Ah | 45 min                  | 67 min  |
| BL4050F 5.0Ah   | 50 min                  | 85 min  |
| BL4080F 8.0Ah   | 76 min                  | 170 min |

\*1 Recommended battery

| Cordless Impact Driver |                                                                                          |
|------------------------|------------------------------------------------------------------------------------------|
| TD003G                 |                                                                                          |
| Variable Speed         | Capacity                                                                                 |
| Brake                  | Machinescrew: M4- M8(5/32- 5/16"), Standard bolt: M5- M16(3/16- 5/8")                    |
| Reversing              | High strength bolt: M5- M14(3/16- 9/16"), Steel: 22mm (7/8")                             |
| Electronic 4-Speed     | Coarse thread (in length): 22- 125mm (7/8- 4-7/8")                                       |
| Constant Speed         | No Load Speed (RPM) Max/ Hard/ Med/ Soft/ Tmode:                                         |
| Built-in Job Light     | 0- 3,700/ 0- 3,200/ 0- 2,100/ 0- 1,100/ 0- 2,400                                         |
| Carrying Case          | Impact per minute (IPM) Max/ Hard/ Med/ Soft: 0- 4,100/ 0- 3,600/ 0- 2,600/ 0- 1,400     |
|                        | Hard/ Med/ Soft: 170/ 50/ 20N·m (1,510/ 440/ 180in.lbs.)                                 |
|                        | Max fastening torque                                                                     |
|                        | 210 N·m (1,860 in.lbs.)                                                                  |
|                        | Vibration Level                                                                          |
|                        | Impact tightening of fasteners of the maximum capacity of the tool: 11.9m/s <sup>2</sup> |
|                        | Sound Pressure Level                                                                     |
|                        | 95 dB(A)                                                                                 |
|                        | Sound Power Level                                                                        |
|                        | 106 dB(A)                                                                                |
|                        | Dimensions (L x W x H)                                                                   |
|                        | w/o Battery: 121x86x195mm (4-3/4x3-3/8x7-5/8")                                           |
|                        | w/ BL4020/ BL4025: 121x86x245mm (4-3/4x 3-3/8x 9-5/8")                                   |
|                        | w/ BL4040: 121x86x252mm (4-3/4x 3-3/8x 9-7/8")                                           |
|                        | Net weight                                                                               |
|                        | 1.7-2.9kg (3.7-6.4 lbs.)                                                                 |
|                        | Standard Equipment : TD003GZ: Hook: 346317-0(1)                                          |
|                        | TD003GA201: Hook: 346317-0(1),                                                           |
|                        | Connector plastic case: 821550-0(1), Inner tray: 835F94-0(1),                            |
|                        | Battery BL4020: 191L34-7(2), FAST CHARGER DC40RC(1)                                      |

Max fastening  
torque  
**210**  
N·m



Work amount on a full battery charge BL4025

approx **280** pcs.

Drove 120mm coarse thread screws into melapi.





**BL  
MOTOR**

Aluminum hammer case


One-touch bit installation

Smoother installation of the bit has been achieved by reducing the resistance against insertion of the bit.

Anti-bit wobbling structure



Max fastening torque  
**210**  
N·m

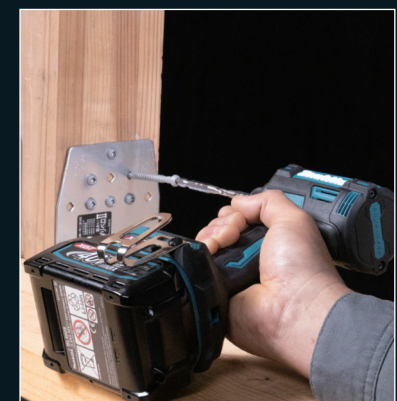

## Simple impact power selection

| Mode                            | Rotation direction | Assist function                                                         |
|---------------------------------|--------------------|-------------------------------------------------------------------------|
| 4 modes<br>(for bolt)           | Forward            | Stops the machine approx 0.2 seconds after it has stopped impact blows. |
|                                 | Reverse            | No                                                                      |
| T-mode<br>(for thin metal only) | Forward            | No                                                                      |
|                                 | Reverse            | Stops the machine at the same time as impact blow is detected.          |



4 modes  
(Max/ Hard/ Med./ Soft for bolt)

1 T-mode  
(for thin metal only)

One LED job light each on both sides

Light mode

- To turn on the light, set F/R change lever in the neutral position, then pull the switch trigger. To turn off the light, pull the switch trigger again.
- The light turns off automatically one hour after turned on.



Constant speed control

Allows to operate the tool at the same speed as that at which you operate the tool on a full charged battery, even when the remaining battery capacity becomes low.

Variable speed control by trigger

**XPT**

eXtreme Protection Technology

