




Angle Grinder

GA9080 230 mm (9")

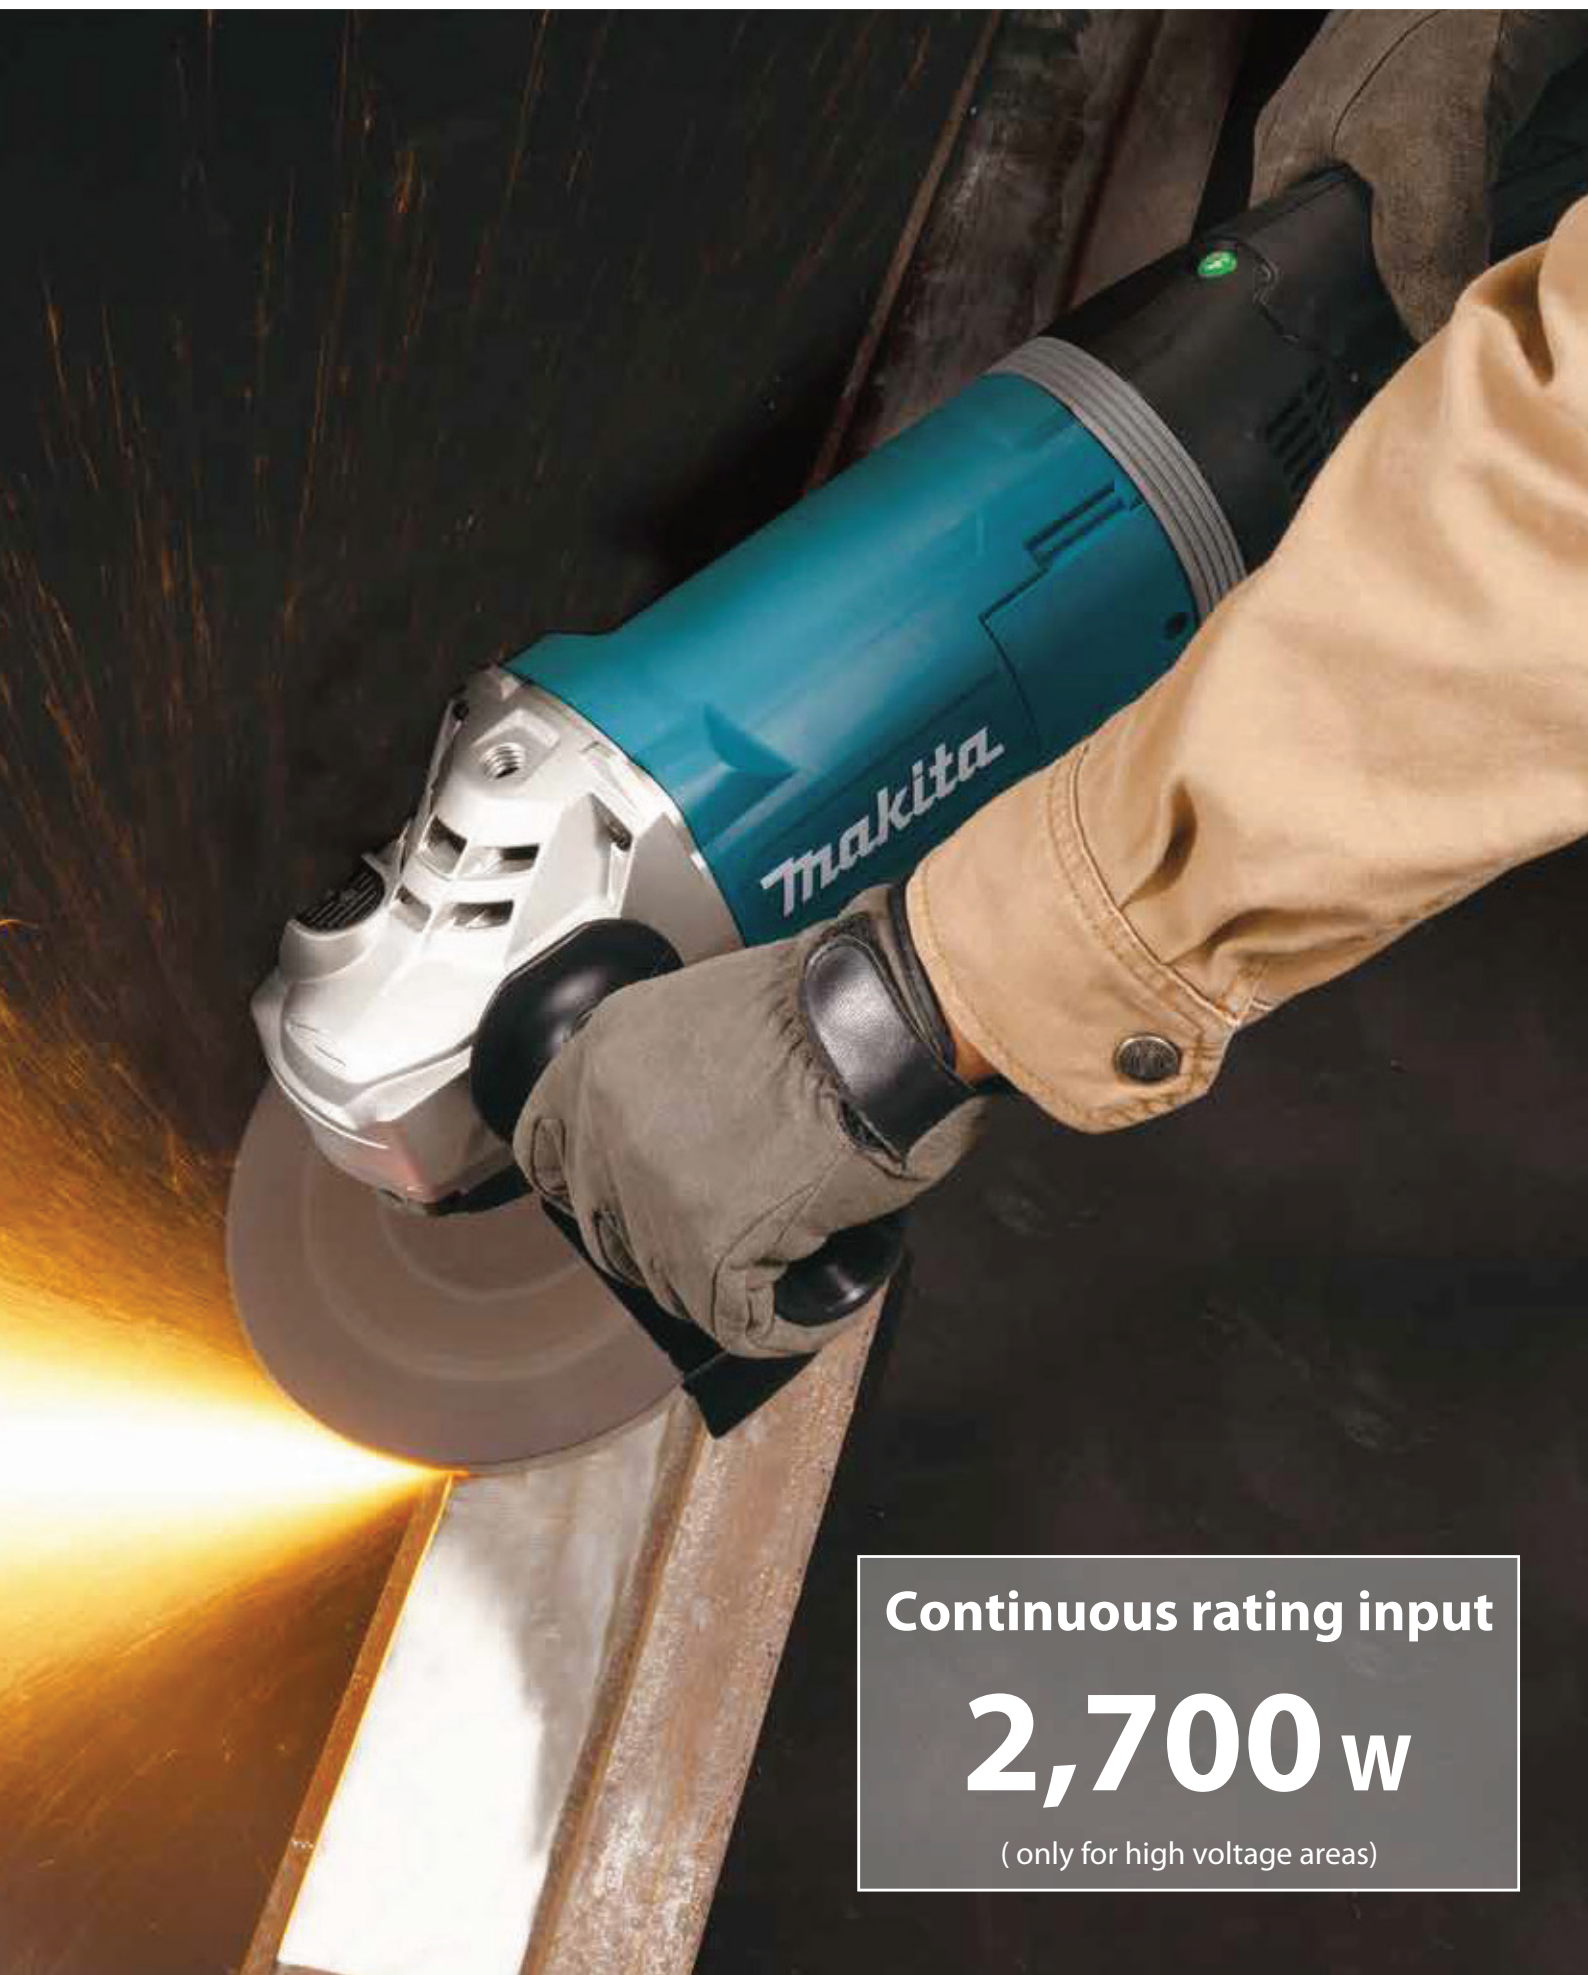

Continuous rating input

2,700 w

(only for high voltage areas)

2,700 W motor with Anti-restart function, Anti-vibration main handle and Soft start

Indication lamp

The indication lamp lights up green when the tool is plugged.

Anti-restart function

The tool does not start with the switch being lock-oneven when the tool is plugged. At this time, the indication lamp blinks in red to show the unintentional restart proof device is working.



Large trigger switch



Torque limiter

Minimizes the chance of overtightening the lock nut at startups and in heavy duty applications.

Rotatable main handle


Can be positioned to suit most cutting and grinding operations.



Wheel diameter

GA7080 180 mm (7")

GA9080 230 mm (9")

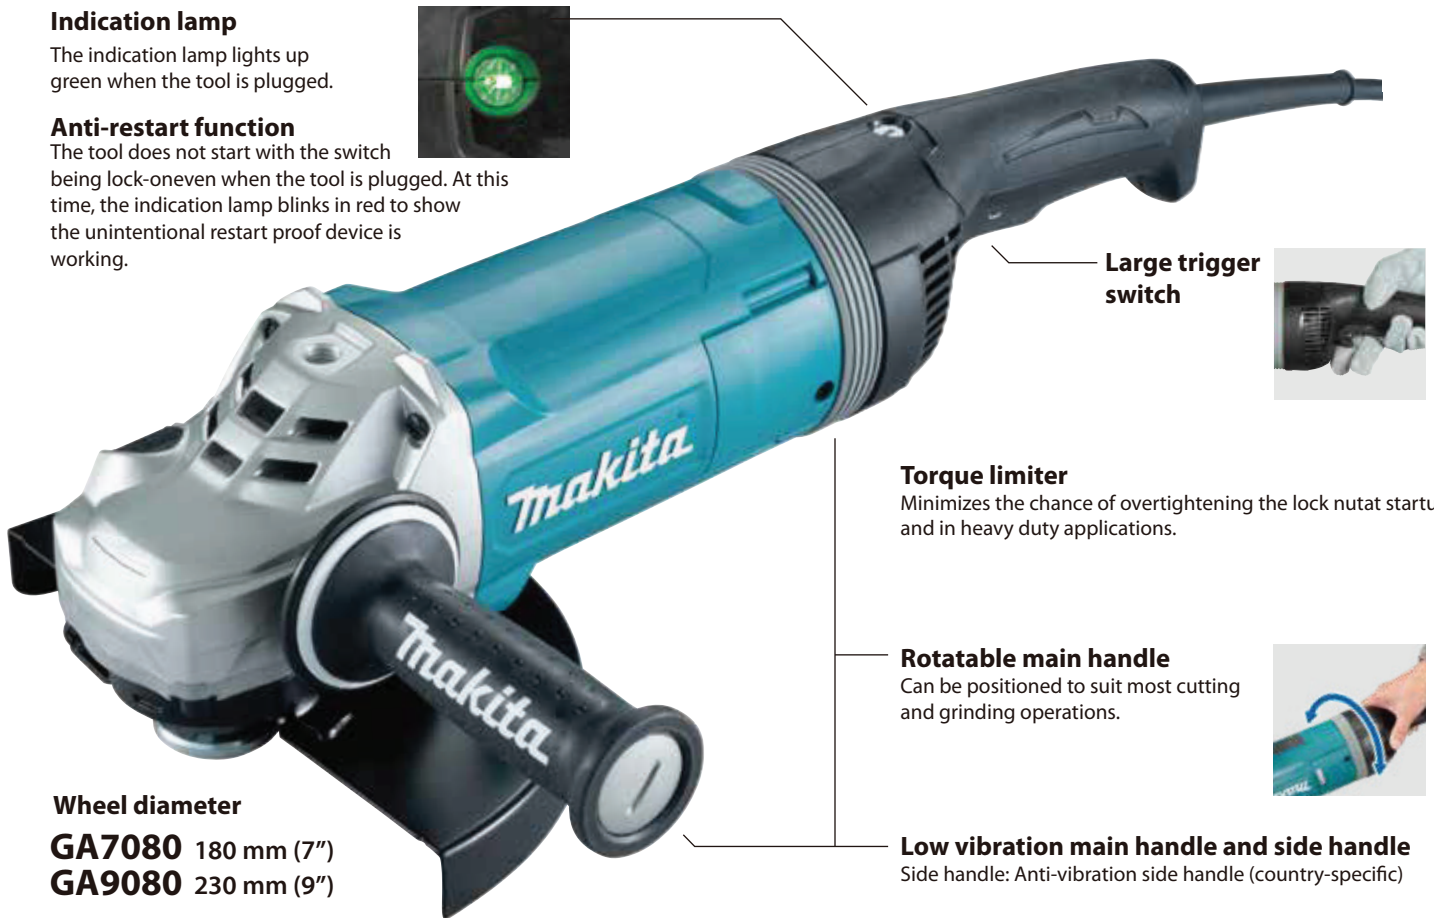

Low vibration main handle and side handle

Side handle: Anti-vibration side handle (country-specific)

Accessories

Dust collecting wheel guard for diamond cutting wheel

GA7080: Part No. 198514-2
Max cutting depth: 35mm

GA9080: Part No. 198440-5
Max cutting depth: 60mm



Wheel cover for cut-off wheel

GA7080:
Part No. 122914-4

GA9080:
Part No. 122913-6



Dust collect cover for 180mm offset diamond wheel

Part No. 191X44-6



Loop handle set

Part No. 199176-9



Dust cover attachment set can be attached to the air vent to reduce ingress of dust.

Part No. 191T14-1



Angle Grinder		GA9080 230 mm (9")	224
	Double Insulation	GA9080	
	Torque Limiter	Continuous Rating Input	2,700W
	Soft Start	Wheel Diameter	230 mm (9")
	Dust Collection	No Load Speed (RPM)	6,600
		Sound Pressure Level	95 dB(A)
		Sound Power Level	103 dB(A)
		Vibration Level	surface grinding with anti vibration side grip 5.3 m/s ²
		Dimensions (L x W x H)	509 x 250 x 144 mm (20 x 9-7/8 x 5-5/8")
		Net weight	6.5-8.6 kg (14.3 - 19.0 lbs.)
		Power supply cord	2.5 m (8.2 ft)
Standard Equipment : Wheel Cover, Anti-Vibration Grip or Side Grip (country-specific), Lock Nut Wrench			

The weight may differ depending on the attachment(s). The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Korallur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in