

Optional Accessories

Dust cover attachment set
Set of covers to attach to the vents of the machine to reduce ingress of dust



GA4590, GA4591, GA4592, GA5090, GA5091, GA5092	GA4593, GA4594, GA4595, GA5093, GA5094, GA5095
Part No. 191V72-9	Part No. 191Y29-8

Grip
Vibration proof
Part No. 194514-0




Made of plastic and elastomer
Part No. 1910X6-8



Made of plastic only
Part No. 1910X5-0



Wheel cover set
For cut-off wheels.



Wheel diameter	Part No.
115mm	1910X9-2/ *1910X7-6
125mm	1910Y0-7/ *1910X8-4

Clip-on cutting wheel guard attachment

Cutting wheel cover attachment that can be easily attached/detached from Wheel cover for depressed center wheel

Wheel diameter	Part No.
115mm	199709-0
125mm	199710-5



Dust collecting wheel guard for grinding

For use during cutting applications of offset diamond wheel

Part No. 191W05-0
*1911K2-1



Dust collecting wheel guard for cutting-off

For use during cutting applications of Diamond wheel

Part No. 191G06-2



Super flange 47
Makes it easy to remove the grinding wheel etc. after grinding operations.

Part No. 192227-7



Toolless lock nut M14
Part No. 195354-9/ 195462-6 (20pcs)



Sanding lock nut 5/8-48
Part No. 193048-0



Angle Grinder

GA5090

125 mm (5")

264 mm

- Double Insulation
- Variable Speed
- Anti-restart function
- Constant Speed
- Soft Start
- Dust Collection

Continuous rating Input	1,900W
Wheel diameter	125 mm (5")
No load speed (RPM)	2,800 - 11,500
Dimensions at grip portion (W x H)	66 x 59 mm (2-5/8 x 2-5/16")
Circumference of grip portion	205 mm (8-1/8")
Sound pressure level	93 dB(A)
Sound power level	101 dB(A)
Vibration level *	7.9 m/s ²
Dimensions (L x W x H)	326 x 140 x 123 mm (12-7/8 x 5-1/2 x 4-7/8")
Net weight	2.6 - 3.8 kg (5.7 - 8.4 lbs.)

Standard Equipment: Cutting wheel cover attachment 125: 199710-5(1), Lock nut wrench: 35 782423-1(1), GRINDING WHEEL 125 WA36N: A-80656(1)



1,900 W Angle Grinder series

Slide switch
125mm (5") GA5090/ GA5091/ GA5092



photo: GA5091




Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Korlur Village, Kasaba Hobli, Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in

Continuous rating input: 1900W

Continuous rating input is drastically increased thanks to the following two improvements:

- Heat generation in armature body is reduced by high grade steel sheet
- Cooling performance improved by repositioned electrical parts, vent shapes and added diffuser

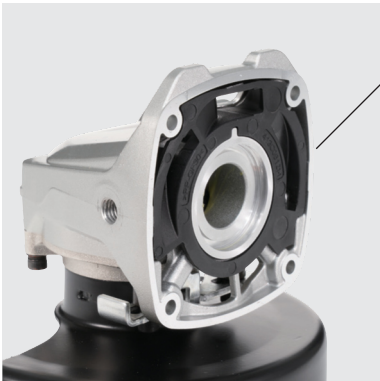

Added diffuser



photo: GA4590

High grade steel sheet



Super Joint System II

Leafspring absorbs vibration and relieves shock during operation.


Easy-to-hold barrel grip housing

Circumference of grip portion

GA4590/ GA4591/ GA4592/ GA5090/ GA5091/ GA5092:205mm
GA4593/ GA4594/ GA4595/ GA5093/ GA5094/ GA5095:207mm


Toolless wheel cover with Slide style lever

Bevel can be adjusted and removed by sliding the lever.

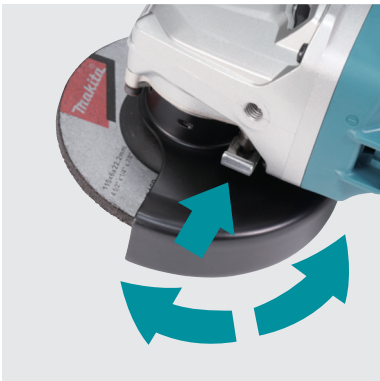

AFT Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

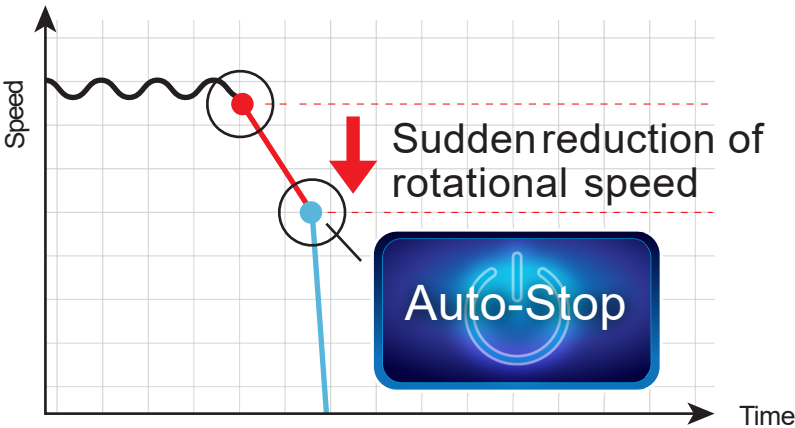

Wheel size		Mechanical brake	Variable speed control by dial	Soft Start	Current limiter	Constant speed control	Anti-restart function
115mm	125mm						
GA4590	GA5090	—	•	•	•	•	•
GA4591	GA5091	•	•	•	•	•	•
GA4592	GA5092	—	—	•	•	•	•
GA4593	GA5093	•	•	•	•	•	•
GA4594	GA5094	•	—	•	•	•	•
GA4595	GA5095	—	—	•	•	•	•

Slide switch

115mm (4-1/2") GA4590/ GA4591/ GA4592
125mm (5") GA5090/ GA5091/ GA5092

Paddle switch

115mm (4-1/2") GA4593/ GA4594/ GA4595
125mm (5") GA5093/ GA5094/ GA5095

