



1,900 W Angle Grinder series

Slide switch

115mm (4-1/2") GA4590/ GA4591/ GA4592

125mm (5") GA5090/ GA5091/ GA5092



photo: GA5091

Paddle switch

115mm (4-1/2") GA4593/ GA4594/ GA4595

125mm (5") GA5093/ GA5094/ GA5095



photo: GA5093




GA4591, GA4593,
GA4594, GA5091,
GA5093, GA5094

Continuous rating input: 1900W

Continuous rating input is drastically increased thanks to the following two improvements:

- Heat generation in armature body is reduced by high grade steel sheet
- Cooling performance improved by repositioned electrical parts, vent shapes and added diffuser



Added diffuser



photo: GA4590

High grade steel sheet



Super Joint System II

Leaf spring absorbs vibration and relieves shock during operation.


Easy-to-hold barrel grip housing

Circumference of grip portion

GA4590/ GA4591/ GA4592/ GA5090/ GA5091/ GA5092: 205mm
GA4593/ GA4594/ GA4595/ GA5093/ GA5094/ GA5095: 207mm


Toolless wheel cover with Slide style lever

Bevel can be adjusted and removed by sliding the lever.



AFT Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

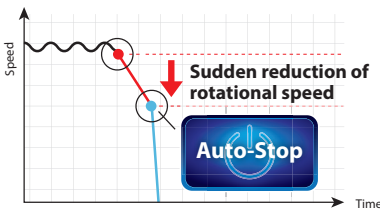

Wheel size		Mechanical brake	Variable speed control by dial	Soft Start	Current limiter	Constant speed control	Anti-restart function
115mm	125mm						
GA4590	GA5090	-	•	•	•	•	•
GA4591	GA5091	•	•	•	•	•	•
GA4592	GA5092	-	-	•	•	•	•
GA4593	GA5093	•	•	•	•	•	•
GA4594	GA5094	•	-	•	•	•	•
GA4595	GA5095	-	-	•	•	•	•

Slide switch

115mm (4-1/2") GA4590/ GA4591/ GA4592
125mm (5") GA5090/ GA5091/ GA5092

Paddle switch

115mm (4-1/2") GA4593/ GA4594/ GA4595
125mm (5") GA5093/ GA5094/ GA5095



Angle Grinder



- Double Insulation
- Dust Collection
- Anti-restart function
- Soft Start
- Constant Speed

Continuous rating input	1,900 W (230-240 V)	218
Amperage	8.3 A (110 V)	
Wheel diameter	125 mm (9")	
No load speed	11,500 min ⁻¹	
Vibration Level	3 m/s ²	
Uncertainty (K)	1.5 dB(A)	
Sound Pressure Level	94 dB(A)	
Sound Power Level	102 dB(A)	
Dimensions (L x W x H)	326 x 140 x 123 mm	
Net weight	2.6 - 3.8 kg	
Power supply cord	2.5 m (8.2 ft)	

Standard Equipment: Lock nut wrench 35 782423-1(1), GRINDING WHEEL 125 WA36N A-80656(1)



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in