



Battery Powered Pruning Shears DUP180



Cordless Pruning Saw

DUC150

18V

BL XPT



Battery Powered Pruning Shears

DUP362

18V x2

XPT



Cordless Earth Auger

DDG461

18V x2

BL ADT XPT



Battery Powered Wheelbarrow

DCU180

18V

BL XPT



DCU601

18V x2

BL XPT



DCU602

18V x2

BL XPT



DCU603

18V x2

BL XPT WG



DCU604

18V x2

BL XPT WG



DCU605

18V x2

BL WG



Accessories

Shear blade U set

Replacement upper blade for Pruning shears



Shear blade L set

Replacement lower blade for Pruning shears



Dresser stone set

Dresser stone for Shear blade sharpening



Holster

Storage and carrying of the machine



MAKPAC TYPE3

For smart organization and easy transportation of power tools and accessories



Charging Time

| Battery | Fast Charging | |
|---------------|---------------|---------|
| | DC18RC | DC18SD |
| BL1815N 1.5Ah | 15 min | 30 min |
| BL1820B 2.0Ah | 24 min | 45 min |
| BL1830B 3.0Ah | 22 min | 60 min |
| BL1840B 4.0Ah | 36 min | 90 min |
| BL1850B 5.0Ah | 45 min | 110 min |
| BL1860B 6.0Ah | 55 min | 130 min |

Battery Powered Pruning Shears

DUP180

- Brake
- Anti-restart function
- Torque Limiter
- Carrying Case

| | |
|----------------------|------------------------------|
| Capacity | Max cutting: 30 mm (1-3/16") |
| Vibration level | 2.5 m/s ² or less |
| Sound pressure level | 70 dB(A) or less |
| Dimensions* | 296 x 40 x 99 mm |
| (L x W x H) | (11-5/8 x 1-9/16 x 3-7/8") |
| Net weight* | 0.68 kg (1.5 lbs.) |

*Without standard equipment such as battery, battery adapter, harness, and controller for operation

Standard Equipment :

Oil spray, Hex wrench, Socket wrench, Dressing stone, Holster, Battery, Charger



Max cutting capacity
ø30 mm

about
8,000 pcs*

Lightweight
0.68 kg
Tool only

Battery adapter type



*When cutting ø15mm branches of Japanese cypress, with BL1860B battery

The weight according to EPTA-Procedure 01/2014 is shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202311





Max cutting capacity
Ø30mm
 Lightweight
0.68kg
 Tool only



Battery adapter

Cord length : 1.4m

The battery is separated by the adapter to reduce hand and arm fatigue.





Slim and Lightweight design

The use of BL Coreless motor*¹ allows for reduction in the grip diameter and weight to reduce user's fatigue from pruning.

*¹ BL motor without iron core on which copper coil wire is wound

BL
 MOTOR

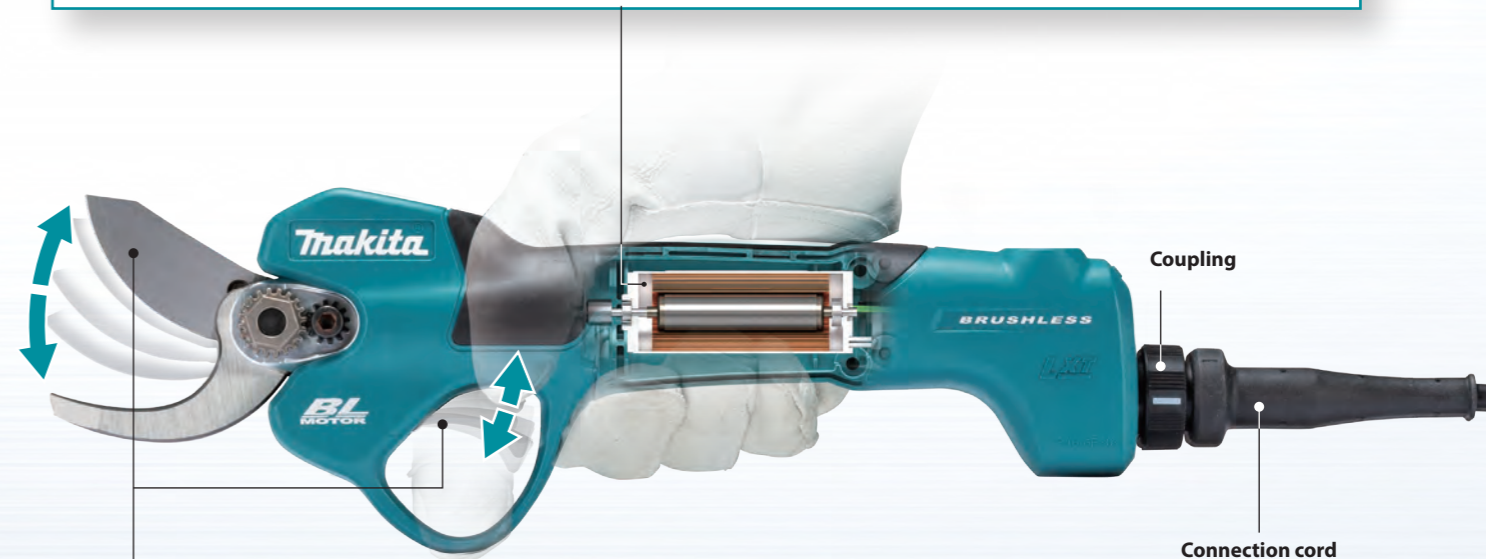

The blades work smoothly along with the trigger due to the sensor on the motor.

The blades respond to the trigger with sensitivity, ensuring a comfortable use experience.



Select from four angles to match branch thickness.

Thin branch ← → Thick branch

Ø10mm Ø18mm Ø25mm Ø30mm



with BL1860B

Work amount on a full battery charge

When cutting Ø15mm branches of Japanese cypress

about **8,000 pcs**

Standby mode

To turn off the tool, pull and hold the switch trigger for more than 3 seconds to close the shear blades, then release the switch trigger, and then press the main power button.

LED indicator

Indicator lamp



Power on

Blinking: Battery capacity warning (when the capacity is 20% or less)


Solid on: Error indication (No battery capacity/ Thermal protection/ Overload)



XPT

Adjustment of blade overlap when closed

(by pressing and holding Blade opening angle adjustment button for 3 seconds or more when fully closed)

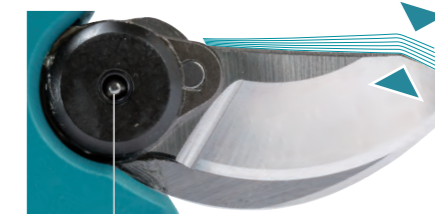

External oil port

Lubrication oil can be injected without disassembling the blades.

