




# Pneumatic Coil Nailer

AN454 45 mm (1-3/4")

## Improved Trigger Valve Design Provides Quick Nail Driving in Contact Actuation Mode

AN454

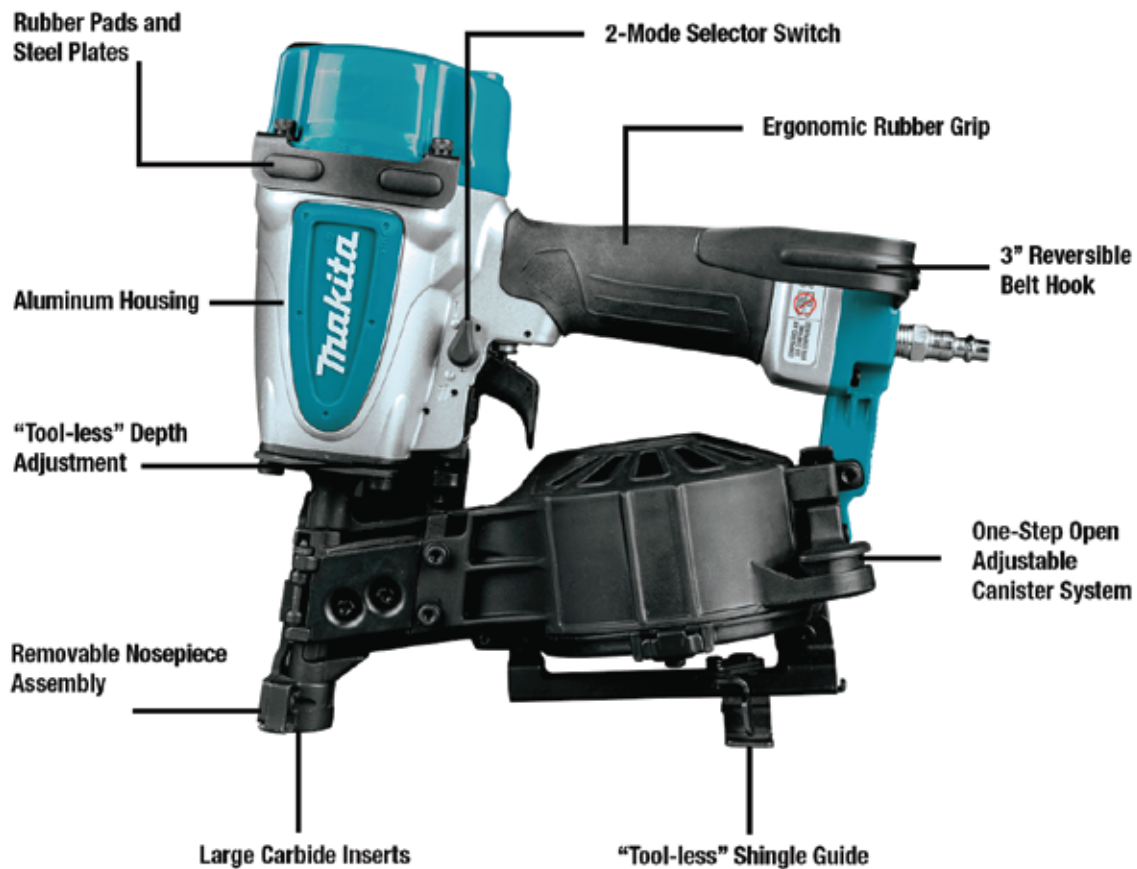


PNEUMATICS



\* Most tools available as "Tool Only" (battery and charger not included), and/or in "Kits"

### Pneumatic Coil Nailer



-  Depth Adjustment
-  Sequential & Bump-fire
-  Wire Collated Nail

<b>Capacity</b>	Length: 19 - 45 mm (3/4 - 1-3/4") Nail gauge: 3.05 mm (0.120")
<b>Driving stroke</b>	82 mm
<b>Cylinder bore diameter</b>	41.6 mm (1-5/8")
<b>Operating pressure</b>	0.49 - 0.83 MPa (70 - 120 PSI)
<b>Magazine capacity</b>	120
<b>Sound pressure level</b>	N/A dB(A)
<b>Sound power level</b>	N/A dB(A)
<b>Noise K factor</b>	N/A dB(A)
<b>Vibration level</b>	N/A m/s <sup>2</sup>
<b>Vibration K factor</b>	N/A m/s <sup>2</sup>
<b>Dimensions (L x W x H)</b>	w/o Hook: 256 x 117 x 271 mm (10-1/8 x 4-5/8 x 10-5/8")
<b>Net weight</b>	2.4 kg (5.2 lbs.)

**Standard Equipment:** Hook, Oil supply (country-specific), Hex wrench



### Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk,  
Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007  
Email: info@makita.in Website: www.makita.in