





Slide Compound Miter Saw LS1110F 255 - 260 mm (10 - 10-1/4")

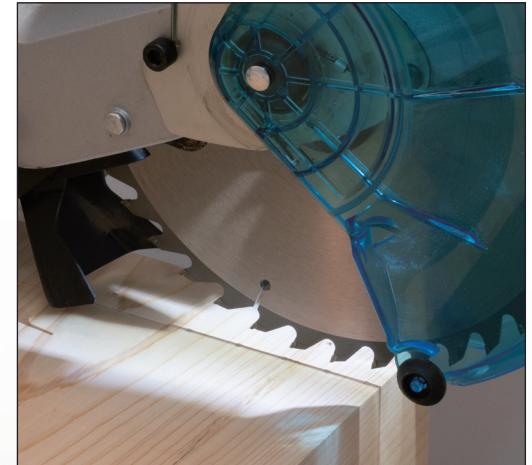

LED job light with cut line guide function

LED job light with cut line guide function


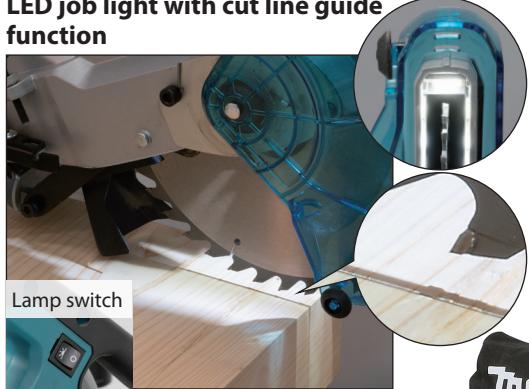


LED job light casts a shadow of the saw blade onto the workpiece as an exact cutting line. By aligning the shadow with the ink line on the workpiece, you can make an exact cut.

Bevel range of 47° left and 2° right

Easy bevel angle change from 45° to 47° left and from 0° to 2° right with simple operation of a push-button

Lever (for bevel angle)




Sub base

can be pulled out for more stable cutting of wide workpiece.

Cutting capacity (height x width)

with 260mm (10-1/4") saw blade


Cross Cut



Miter 0°
Bevel 0°

91 x 310 mm
(3-5/8 x 12-1/4")

Miter Cut (left & right)



Miter 45° left / right
Bevel 0°

91 x 220mm
(3-5/8 x 8-5/8")

Bevel Cut (left & right)



Miter 0°
Bevel 45° left

50 x 310mm
(2 x 12-1/4")

Compound Cut



Miter 45° left / right
Bevel 45° left

50 x 220mm
(2 x 8-5/8")

Accessories

Miter Saw Stand WST06



Slide Compound Miter Saw

LS1110F 255 - 260 mm (10 - 10-1/4")

	Double Insulation	Continuous rating Input Wheel diameter Bevel angle Miter angle No load speed (RPM) Sound pressure level Sound power level Dimensions (L x W x H) Net weight Power supply cord	1,450W 255 - 260 mm (10 - 10-1/4") Left: 47° / Right: 2° Left: 47° / Right: 47° 4,500 min ⁻¹ 91 dB (A) 102 dB (A) 745 x 497 x 565 mm (29-1/4 x 19-1/2 x 22-1/4") 16.4 kg (36.2 lbs.) 2.0 m (6.6 ft)
	Brake		
	Soft Start		
	Dust Collection		
	Built-in Job Light		

Standard Equipment : TCT saw blade, Vertical vise, Dust bag, Hex wrench

Weight according to EPTA-Procedure 01/2014

Items of standard equipment and specifications may vary by country or area.



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Korallur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067

Email: info@makita.in Website: www.makita.in