




# Pneumatic Framing Nailer

## AN924 90 mm (3-1/2")

Nail loading from the upper opening of magazine is convenient to insert an additional strip

AN924

PNEUMATICS

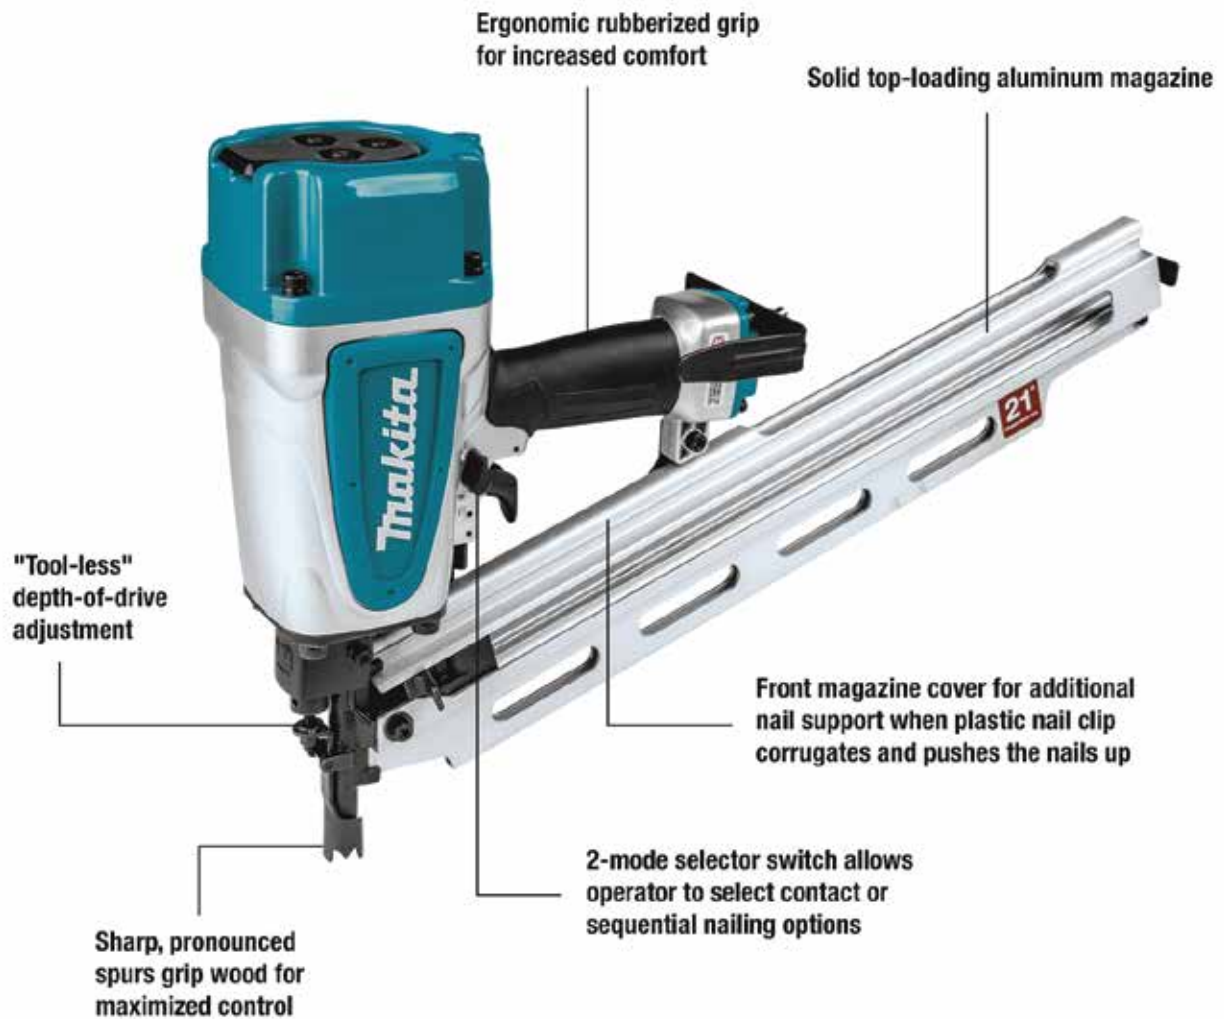

### Pneumatic Framing Nailer



Depth Adjustment



Wire Collated Nail



Auto Firing Stop

<b>Capacity</b>	Length: 50 - 90 mm (2 - 3-1/2") Dia.: 2.9 - 3.76 mm (0.113 - 0.148") / Angle: 21°
<b>Operating pressure</b>	0.49 - 0.83 MPa (70 - 120 PSI)
<b>Magazine capacity</b>	64 - 73
<b>Driving stroke</b>	126 mm (5")
<b>Cylinder bore diameter</b>	57 mm (2-1/4")
<b>Sound pressure level</b>	N/A dB(A)
<b>Sound power level</b>	N/A dB(A)
<b>Noise K factor</b>	N/A dB(A)
<b>Vibration level</b>	N/A m/s <sup>2</sup>
<b>Vibration K factor</b>	N/A m/s <sup>2</sup>
<b>Dimensions (L x W x H)</b>	560 x 117 x 348 mm (22 x 4-5/8 x 13-3/4")
<b>Net weight</b>	3.8 kg (8.3 lbs.)

**Standard Equipment :** Oil supply (country-specific), Hook, Hex wrench



**Makita Power Tools India Pvt. Ltd.**

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk,  
Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007  
Email: info@makita.in Website: www.makita.in