



# Angle Grinder GA7090 / GA9090 180 mm (7") / 230 mm (9")



**Continuous rating input: 2,200W**



Weight  
GA7090 / GA9090

**5.1 kg / 5.3 kg**

Overall length  
GA7090 / GA9090

**438 mm**



### GA7090

180 mm (7")



### GA9090


230 mm (9")




## Compact and lightweight / Excellent maneuverability

The side grip can be attached closer to the center of the wheel rotation to reduce the load on the user's hand for improved maneuverability in grinding operation.

### Overall length

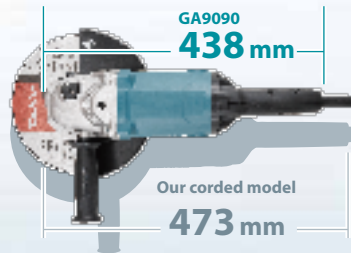

### Light weight

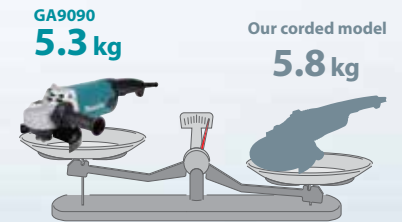

### Reduced core abrasion

(Stator) core abrasion is reduced by adding a water absorption process to the nylon motor housing after molding to reduce dimensional changes of the housing in humid conditions.

## Accessories

### Wheel cover

for Abrasive cut-off wheel

GA7090

Part No. 122914-4

GA9090

Part No. 122913-6



### Dust collect cover

for Diamond wheel

GA7090

Part No. 198514-2

GA9090

Part No. 198379-2 / 198440-5 / 198509-5



### Vibration proof grip set

Part No. 194543-3



### Loop handle set

Part No. 199176-9



### Lock nut release socket 35 set

Part No. 194305-9



### Rubber pad

Part No. 192978-2



## Angle Grinder

### GA7090 / GA9090 180 mm (7") / 230 mm (9")

Double Insulation

Dust Collection

	GA7090	GA9090
Continuous rating input	2,200 W	2,200 W
Wheel diameter	180 mm (7")	230 mm (9")
Hole diameter	22.23 mm (7/8")	22.23 mm (7/8")
No load speed	8,500 min <sup>-1</sup>	6,600 min <sup>-1</sup>
Cutting depth	69 mm (2-3/4")	69 mm (2-3/4")
Vibration level	Surface grinding w/ Normal side grip: 6.9 m/s <sup>2</sup> Surface grinding w/ Anti-vibration side grip: 7.3 m/s <sup>2</sup> Disc sanding w/ Normal side grip: 2.9 m/s <sup>2</sup> Disc sanding w/ Anti-vibration side grip: 3.5 m/s <sup>2</sup>	Surface grinding w/ Normal side grip: 7.0 m/s <sup>2</sup> Surface grinding w/ Anti-vibration side grip: 6.7 m/s <sup>2</sup> Disc sanding w/ Normal side grip: 2.7 m/s <sup>2</sup> Disc sanding w/ Anti-vibration side grip: 2.5 m/s <sup>2</sup>
Vibration K factor	1.5 m/s <sup>2</sup>	1.5 m/s <sup>2</sup>
Sound pressure level	92 dB(A)	93 dB(A)
Sound power level	100 dB(A)	101 dB(A)
Noise K factor	3 dB(A)	3 dB(A)
Dimensions (L x W x H)	438 x 200 x 144 mm (17-1/4 x 7-7/8 x 5-5/8")	438 x 250 x 144 mm (17-1/4 x 9-7/8 x 5-5/8")
Net weight	5.1 - 7.3 kg (11.2 - 16.1 lbs.)	5.3 - 7.4 kg (11.7 - 16.3 lbs.)
Power supply cord	2.0 m (6.6 ft)	2.0 m (6.6 ft)

Standard Equipment : Side grip, Lock nut wrench, Wheel cover for cut-off wheel

The weight may differ depending on the attachments. The lightest and heaviest combinations, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.



## Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,

Hoskote Taluk, Bengaluru - 560067

Email: info@makita.in Website: www.makita.in