




High Power  
Durability  
Digital Communication

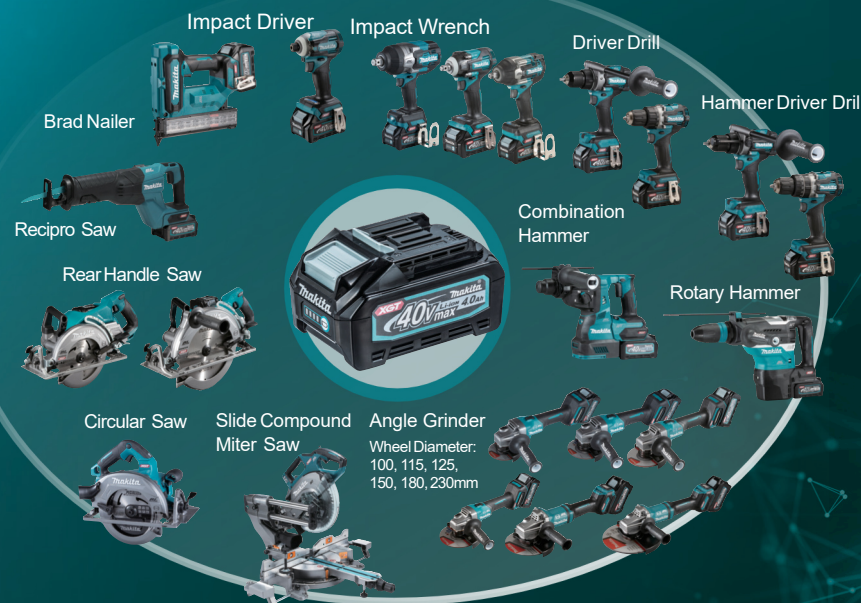

## Portable Power Pack

PDC01

Powered by up to four  
18V LXT batteries

PDC1200

Powered by 36V-40Vmax  
built-in battery

Adapter set (40Vmax)

Part No. 191N62-4

Charger:  
DC4001

Charging time:  
6 hours

Adapter between Battery box of  
Portable power pack and Product  
on 40Vmax XGT platform

## Optional Accessories

Adapter pipe 85-72 set

Part No. 191L96-5

Extension nozzle set \*

Part No. 197888-8

Flat nozzle set \*

Part No. 197889-6

Narrow profile improves air speed for  
removing heavier debris such as wet leaves

Gutter nozzle set \*

Part No. 191B03-8

End nozzle 80 set


Part No. 191P97-7

For blowing fallen leaves


Shoulder Belt

Part No. 166094-6

\*Use with Adapter pipe 85-72 set (Part No. 191L96-5)

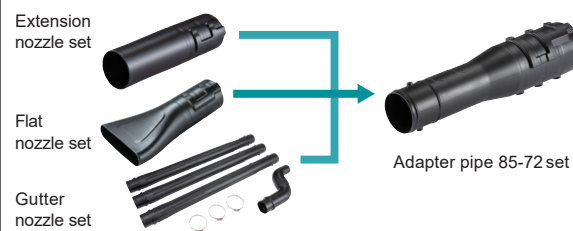

## Cordless Blower UB001G



|                        |                                                                 |
|------------------------|-----------------------------------------------------------------|
| Max Air Volume         | Cruise Control Mode: 0 - 13.5 m³/min<br>Boost Mode: 16.0 m³/min |
| Max Air Velocity       | Cruise Control Mode: 53 m/s<br>Boost Mode: 64 m/s               |
| Blowing Force          | Cruise Control Mode: 0 - 12 N<br>Boost Mode: 17 N               |
| No Load Speed (RPM)    | Cruise Control Mode: 0 - 20,000<br>Boost Mode: 23,000           |
| Sound Pressure Level   | 83.7 dB(A)                                                      |
| Sound Power Level      | 94.1 dB(A)                                                      |
| Vibration Level        | 2.5 m/s² or less                                                |
| Dimensions (L x W x H) | w/ BL4040: 917 x 1,017 x 167 mm<br>(36 - 40 x 6-9/16 x 11-3/4") |
| Net weight             | 3.1 - 3.9 kg (6.8 - 8.6 lbs.)                                   |

### Standard Equipment :

UB001GZ: Adapter pipe 85-72: 191L96-5(1), End nozzle 80: 191P97-7(1), Extension nozzle: 197888-8(1), Flat nozzle: 197889-6(1)  
UB001GM101: Battery BL4040: 191B31-3(1), Adapter pipe 85-72: 191L96-5(1), End nozzle 80: 191P97-7(1), Extension nozzle: 197888-8(1), Flat nozzle: 197889-6(1), FAST CHARGER: DC40RA(1)  
UB001GM201: Adapter pipe 85-72: 191L96-5(1), End nozzle 80: 191P97-7(1), Flat nozzle: 197889-6(1), Extension nozzle: 197888-8(1), Battery BL4040: 191B31-3(2), FAST CHARGER DC40RA(1)



Cordless Blower  
UB001G



**40V Li-ion max**

Lightweight  
but  
High power

Powerful  
blowing force  
Max 17 N\*

\*Boost mode


Net weight  
**3.1 kg**  
with BL4025





## Lesskickback but powerful blowing

Nozzle is designed so that its end points downward. This small change can displace the reaction force towards the handle side to minimize the return tilting action of the machine, reducing user's arm fatigue.

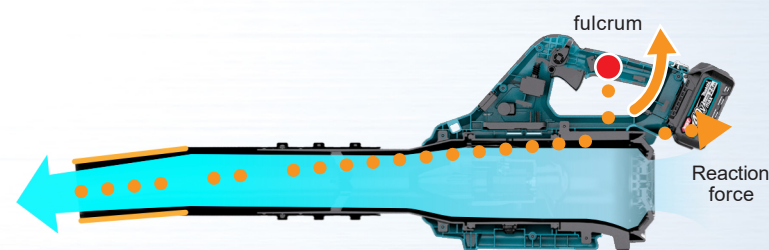

**BL**  
**MOTOR**

### Lightweight design

Improvement in power efficiency makes BLmotor more compact and lightweight.

Net weight  
**3.1 kg**  
with BL4025

### Low noise level

Smoother airflow, which is achieved by redesigning the position of controller and the air intake port, decreases noise while increasing blowing force.

Noise level  
at max blowing force

**59dB**

ANSI measurement standard



## Boost mode

To use the machine in the Boostmode, pull the switch trigger until the switch trigger stops in the halfway position, and then pull the switch trigger fully.

Blowing Force

**17N**



Variable speed control  
by trigger

| Available operation time          |                                               |
|-----------------------------------|-----------------------------------------------|
| Time per run*1<br><b>0.5-5min</b> | Cumulative<br>operation time*2<br><b>6min</b> |
| with BL4040                       |                                               |

\*1 Max time per run is at least 30 seconds or longer and depends on usage environment.

\*2 Total operation time when the machine was intermittently used in Boostmode only.

Usage time of Boostmode is restricted to protect the machine. Available operation time in boost mode, under environment temperature of 25°

## Variable control trigger + Cruise control lever

Blowing Force

**0~12N**

Cruise control lever



Variable speed control  
by trigger

Cruise control lever allows you to lock the variable speed control trigger at a desired power level.

**WG**  
**WET GUARD**




High water-resistance allows to operate the machine even if it is wet with water.

3-stage telescopic long nozzle with an adjustment range of 100mm (4")



Best grip-to-frame angle

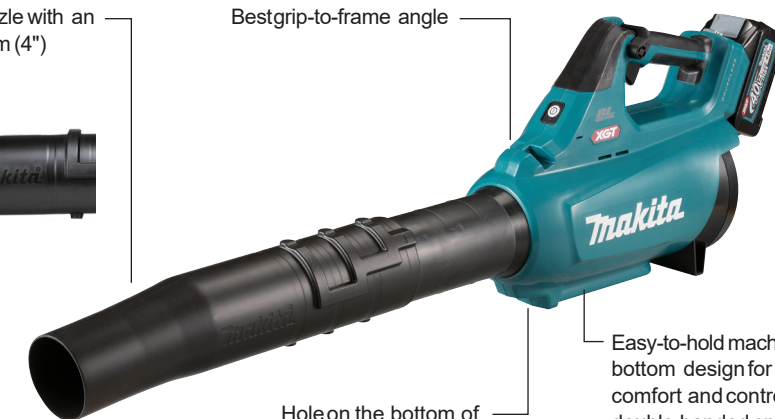

Hole on the bottom of  
housing for hanging

Easy-to-hold machine  
bottom design for added  
comfort and control in  
double handed operation