



Cordless Die Grinder GD001G / GD002G

Satisfy Professional's Needs



XGT
40V Li-ion
max

GD001G
Slide-switch

High power for high-efficiency grinding

Powerful grinding for fine tasks

GD002G
Paddle switch

BL **AFT** **XPT**
MOTOR

XGT
40V Li-ion
max

Work efficiency
Increased by approx. **40%**


*Compared to our 18V model

BL
MOTOR

AFT

Active Feedback sensing Technology

Shuts down the tool, if the
rotation speed suddenly
slows down.

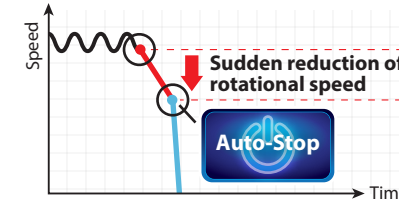

Speed adjustment dial

enables adjustment of the
rotation speed to suit the
application

Dial	No load speed (min ⁻¹)	Application
1	7,000	Polishing and finishing
2	12,500	Paint removal
3	18,500	Rust removal
4	23,500	Burr removal
5	29,000	Grinding

Charging Time

	Fast Charging DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
BL4080F/H 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Die Grinder

GD001G / GD002G

Brake	No load speed	7,000 - 29,000 min ⁻¹
Anti-restart function	Circumference of grip portion	146 mm (5-3/4")
Constant Speed	Vibration level*	GD001G: 5.4 m/s ² Surface grinding (artificial wheel 25-50 mm) GD001G: 15.2 m/s ² Surface grinding (artificial wheel 50 mm over) GD002G: 5.7 m/s ² Surface grinding (artificial wheel 25-50 mm) GD002G: 14.6 m/s ² Surface grinding (artificial wheel 50 mm over)
Soft Start	Uncertainty (K) : for Vibration*	1.5 m/s ²
Built-in Job Light	Sound pressure level*	78 dB (A) No load (artificial wheel 25-50 mm) 80 dB (A) No load (artificial wheel 50 mm over) 91 dB (A) No load (artificial wheel 50 mm over)
	Sound power level*	3 dB (A)
	Uncertainty (K) for Noise*	3 dB (A)
	Dimensions (L x W x H)	452 x 85 x 119 mm (17-3/4 x 3-3/8 x 4-11/16")
	Net weight	2.2 - 3.4 kg (4.9 - 7.5 lbs.)

Standard Equipment : Wrench, Collet cone, Battery, Charger

*EN60745-2-23

The net weight value includes the lightest and heaviest combination of the attachment(s) and battery cartridge(s) which are specified in the instruction manual.
Items of standard equipment and specifications may vary by country or area.



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk,
Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007
Email: sales@makita.in Website: www.makita.in