



Cordless Impact Driver TD004G

Satisfy Professional's Needs



XGT
40V Li-ion
max

Excellent fastening performance in heavy-duty tasks

Max fastening torque
230 N·m



Delivers excellent fastening performance in heavy-duty tasks, such as tightening hex head or hexalobular (star-shaped) hole head course thread screws, which are less prone to cam-out.



XGT
40V Li-ion
max


Max fastening torque

230 N·m

- Delivers excellent fastening performance in heavy-duty tasks, such as tightening hex head or hexalobular (star-shaped) hole head course thread screws, which are less prone to cam-out.
- Capable of smoothly fastening screws on hard materials, such as LVL (Laminated Veneer Lumber)

4-stage impact power selection + T-mode (for thin metal sheets only)

- The impact power can be adjusted to four stages to match the type of screw and material.
- For tasks requiring attention to cam-out, such as with Phillips head screws, the impact force can be adjusted accordingly.
- Equipped with the T-Mode to minimize screw stripping, which is likely to occur when a self-drilling screw is tightened into a thin metal sheet workpiece under light load.

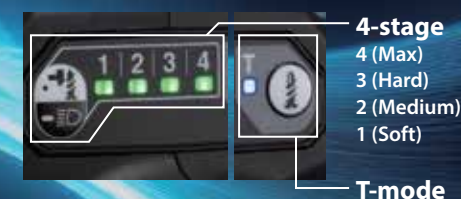

Accessories

Tool hanger set
Part No. 191K57-9



Drill chuck

Part No. 192173-4



Charging Time

		DC40RA	DC40RC
40V Li-ion max			
*1 BL4020 2.0Ah	22 min	30 min	
*1 BL4025 2.5Ah	28 min	38 min	
*1 BL4040/F 4.0Ah	45 min	67 min	
BL4050F 5.0Ah	50 min	85 min	
BL4080F 8.0Ah	76 min	170 min	

*1 Recommended battery



One-touch bit installation

Reduced resistance allows for easier bit installation.



LED job light

Twin LEDs with preglow and afterglow functions



Variable speed control by trigger

Allows for speed adjustments based on the material or application.

XPT
eXtreme Protection Technology



Overall length
136 mm



Cordless Impact Driver TD004G

	Variable Speed	Capacity	Steel: 22 mm (7/8") / Wood (Auger bit): 24 mm (15/16")
	Brake	Max fastening torque	230 N·m (2,040 in.lbs.)
	Reversing	No load speed	Max / Hard / Med. / Soft: 0 - 3,900 / 0 - 3,000 / 0 - 2,100 / 0 - 1,200 min ⁻¹
	Anti-restart function	Impacts per minute	Max / Hard / Med. / Soft: 0 - 3,900 / 0 - 3,600 / 0 - 3,100 / 0 - 1,900 min ⁻¹
	Electronic 4-Speed	Vibration level (EN62841-2-2)	Impact tightening of fasteners of the maximum capacity of the tool: 23.5 m/s ²
	Built-in Job Light	Vibration K factor (EN62841-2-2)	Impact tightening of fasteners of the maximum capacity of the tool: 1.5 m/s ²
	Carrying Case	Sound pressure level (EN62841-2-2)	100 dB (A)
		Sound power level (EN62841-2-2)	108 dB (A)
		Noise K factor (EN62841-2-2)	3 dB (A)
		Dimensions (L x W x H)	136 x 86 x 248 mm (5-3/8 x 3-3/8 x 9-3/4")
		(Battery)	BL4025
		Net weight	1.8 - 3.1 kg (4.0 - 6.8 lbs.)
		(Battery)	BL4020-BL4080F

Standard Equipment: Battery, Charger, Hook, Hand strap

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combinations are shown in the table. Items of standard equipment and specifications may vary by country or area.



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk,
Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007
Email: sales@makita.in Website: www.makita.in