



Cordless Flat-head Angle Grinder
GA055G / GA056G 125 mm (5")

Satisfy Professional's Needs



XGT
40V^{Li-ion}max

Efficient grinding in tight spaces



Tip access angle

39°

* with 4 mm thick offset wheel



BL MOTOR **AFT** **XPT**


XGT
40V^{Li-ion}max

Efficient grinding in tight spaces with angles as small as 39°



AFT Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

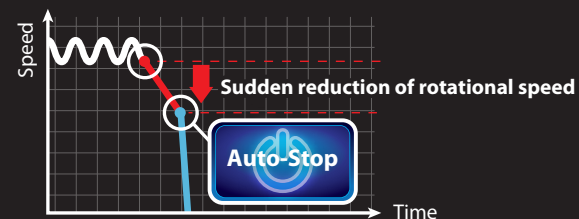

Electric brake

Stops the wheel immediately when the switch is released.



Anti-restart function

Prevents accidental start-up when the battery is installed while the switch is on.



Speed adjustment dial


Allows stepless speed control from 1 to 5 to suit the application.

Number	No load speed
1	3,000 min ⁻¹
2	4,500 min ⁻¹
3	6,000 min ⁻¹
4	7,500 min ⁻¹
5	9,000 min ⁻¹



XPT eXtreme Protection Technology

High water-resistance compatible with XPT

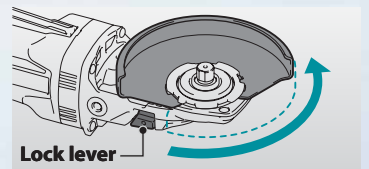

Toolless wheel cover

Tool-less installation and removal, with angle adjustment using the lock lever.

Accessories / Optional

Side grip

Part No. 1910X6-8

For added comfort and control

Part No. 194514-0

Anti-vibration side grip for lower vibration



Wheel guard (GA055G only)

Part No. 1915U6-7

Wheel cover 125ct set



Charging Time

	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
BL4080F/H 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Flat-head Angle Grinder

GA055G / GA056G

Variable Speed

Brake

Anti-restart function

Soft Start

Carrying Case

* EN62841-2-3

Wheel diameter	125 mm (5")
Minimum access angle	39°
No load speed	3,000 - 9,000 min ⁻¹
Cutting depth	30 mm (1-3/16")
Vibration level*	GA055G: 5.0 m/s ² / GA056G: 5.1 m/s ² GA055G: 5.9 m/s ² / GA056G: 6.3 m/s ² 2.5m/s ² or less
Uncertainty (K) for Vibration ¹	1.5m/s ²
Sound pressure level*	GA055G: 83 dB(A) / GA056G: 84 dB(A)
Sound power level*	GA055G: 91 dB(A) / GA056G: 92 dB(A)
Uncertainty (K) for Noise*	3 dB(A)
Dimensions (L x W x H)	483 x 140 x 136 mm (19 x 5-1/2 x 5-3/8")
(Battery)	BL4040F
Net weight	3.1 - 4.4 kg (6.8 - 9.7 lbs.)
(Battery)	BL4020 - BL4080F

Standard Equipment : GA055GZ-Lock nut wrench 35-782423-1(1)
GA056GZ-Lock nut wrench 35-782423-1(1)

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.

Items of standard equipment and specifications may vary by country or area.



Makita Power Tools India Pvt. Ltd.
Unit II, Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in | Website: www.makita.in