

40Vmax Chain Saw series

Equivalent to 50cc-class chain saws
UC030G
(Captivenuts type)



photo: UC030G

Equivalent to 42cc-class chain saws
UC010G/ UC011G/ UC012G/
UC013G/ UC020G*
*(Motor unit only)
(Captivenuts type)



photo: UC012G

UC014G/ UC015G/
UC016G/ UC017G
(Tool-less chain adjustment type)



photo: UC016G

Equivalent to 35cc-class chain saws
UC024G/ UC025G/
UC026G
(Captivenuts type)



photo: UC024G


UC021G/ UC022G/
UC023G
(Tool-less chain adjustment type)



photo: UC021G

Accessories

Guide bar / Sawchain / Guide bar cover / File diameter / Drive sprocket




Guide bar			Saw chain						Bar cover Part No.	File diameter		Drive sprocket	
Bar length	Type	Part No.	No. of drive links	Gauge	Pitch	Cutter type	Type OREGON	Saw chain Part No.		1st half of top plate	2nd half of top plate	Pitch/ No. of teeth	Part No.
25cm/10"	Sprocket nose bar (Micro-Lite)	191T85-8	46	1.1mm/ .043"	.325"	80TXL	MC	191T89-0	413X66-9	4.0mm	4.0mm	.325" / 7	1916N6-4
30cm/12"	Sprocket nose bar	191G15-1	46	1.1mm/ .043"	3/8"	90PX	CC	191H01-8	413G23-5	4.5mm	4.0mm	3/8" / 6	1916N7-2

File and File holder

The file holder guides sharpening at 30° and controls depth to 4/5 of the file diameter.



Size	Saw chain type	File		File and File holder Part No.
		Q'ty	Part No.	
4.0mm	80TXL	2	D-67359	D-70948
		12	D-67365	
4.5mm	90PX	2	D-67371	D-70954
		12	D-67387	





Flat file and File handle



Flat file		File handle	
Q'ty	Part No.	Q'ty	Part No.
1	D-67452	1	D-67496
12	D-67468	12	D-67505

Depth gauge jointer

After sharpening the chain, check the height of the depth gauge using the chain gauge tool.

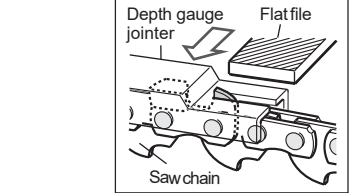


Round file bit

6.35mm (1/4) Hex shank (MZ)



Angle plate

25 / 30deg



Size	Round filebit		Angleplate Part No.	Angleplate & filebit set Part No.
	Part No.	Part No.		
4.0mm	D-73748	D-75605	D-75611	D-75627
4.5mm	D-73754	D-75605		

File set in roll-up pouch

Round File(3pcs) /
File Holder / Flat
File / Handle(2pcs)
/ Depth Gauge set



Filing vise



Part No.
D-67480

Chain oil

Capacity	Part No.
100ml	199897-3
1L	195093-1 196946-7



Spike bumper set

Part No.
1917P5-6



Charging Time

	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Chain Saw

UC031G

	Variable Speed	Chain type 80TXL/ 90PX
	Brake	Guide bar length 250, 300mm (10, 12")
	Anti-restart function	Chain speed (at no load) 0 - 24.0m/s
	Automatic Oiling	Chain pitch 0.325/ 3/8
	Chain Brake	Chain gauge 1.1/ 1.1 mm (0.043/ 0.043")
		Oil tank capacity 150 mL (5.1 oz)
		Dimensions(L x W x H) 295 x 188 x 203mm (11-5/8 x 7-3/8 x 8")
		(Battery) BL4025
		(Attachment) w/o Guidebar, Sawchain
		Net weight 3.2 - 3.8 kg (7.1 - 8.4 lbs.)
		(Battery) BL4025 - BL4050F
		(Attachment) 200 - 300mm guidebar, 80TXL sawchain, chain oil

Standard Equipment : UC031GZ: Guide bar 10: 191T85-8(1), Saw chain 10: 191T89-0(1), Guide bar case 280: 413X66-9(1)



Cordless Chain Saw
UC031G



XGT
40V **Li-ion**
max

Excellent combination of high efficiency and a lightweight design



Performance equal to or greater than

27cc-class
chain saws




Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Korlur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in

Excellent tool balance with optimal center of gravity

A shorter distance between the top handle and the center of gravity improves balance and reduces arm strain during horizontal cutting.

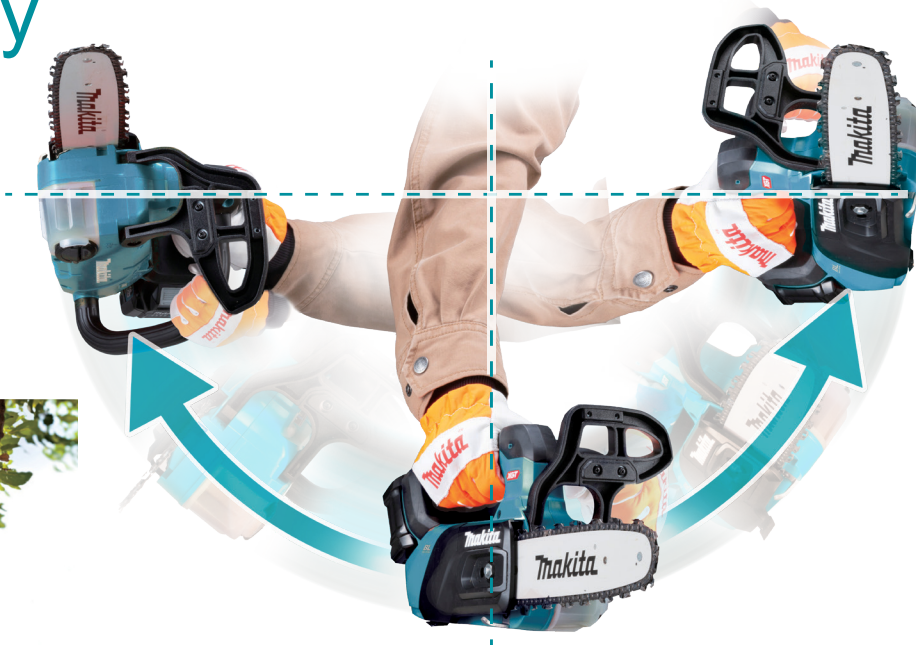


Lightweight
at **3.2 kg**

with BL4025, Guide bar 250mm
Saw Chain 80TXL

Work amount on a full
battery charge

Approx. **85 pcs**

With BL4025, 80TXL saw chain
Cutting 100 x 100 mm square cedar timber

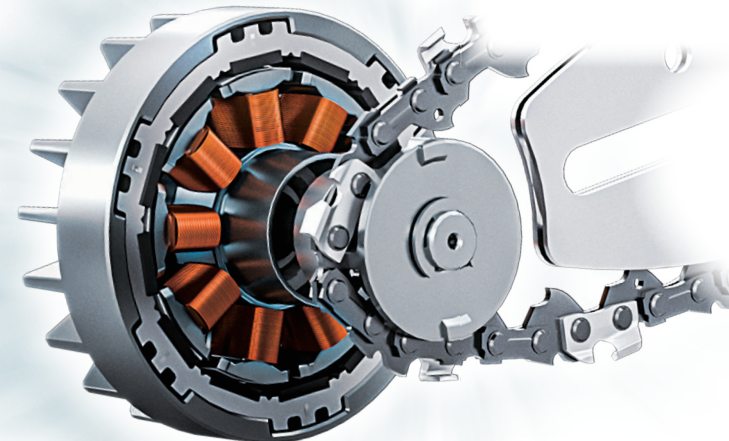


BL
MOTOR

High efficiency with
Outer-rotor brushless motor
and Direct-drive system

Excellent acceleration



Enhanced trigger response provides fast acceleration, enabling efficient continuous and repetitive cutting tasks such as pruning.

Chain speed
24.0 m/s

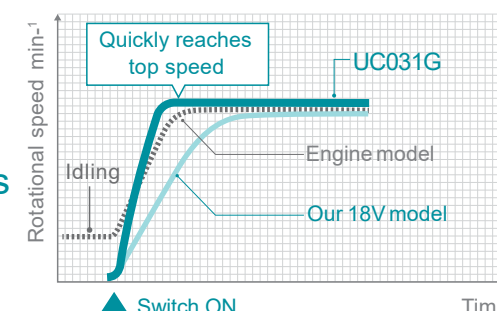


Excellent restartability (when locked)

If the tool locks due to load, removing the load immediately allows the motor to start again without retriggering, making it possible to resume cutting operations.




Main power button with enhanced operability

The button provides tactile feedback. The main power lamp and the two-color warning lamp clearly indicate power and error states.

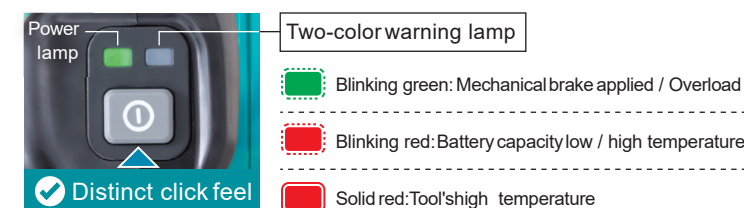

Hook with quick attachment/ detachment

Allows one-handed attachment to and removal from a carabiner or similar devices.



Retractable hook

High water-resistance

IPX4

This tool is rated IPX4 for water resistance.

XPT

High water-resistance compatible with eXtreme Protection Technology



- Captive nuts prevent loss of nut when removing sprocket cover to replace the guide bar or saw chain.
- Adjustable automatic chain lubrication
- Variable speed trigger Allows for speed adjustments based on the material or application.
- Chain oil level window Allows the operator to easily check the oil level.