



Cordless Combination Hammer HR011G / HR012G

28 mm (1-1/8") Adapted for SDS-PLUSbits



40V Li-ion max

Impact energy

3.3

Joule

Maximum drilling efficiency in its class*

Compact and lightweight design with low vibration

* In the category of 28 mm-class cordless hammer drills with SDS-plus shank. According to our research as of November 2025.

Dust collection system

DX17/DX18

Clean operation with excellent maneuverability

Photo: HR011G+ DX17

Low vibration

Hammerdrilling into concrete

HR011G **10.5** m/s²

HR012G **10.2** m/s²

Work efficiency
increased by

about **30** %

Compared to our previous model

Max. drilling capacity

28mm

HR011G



Dust collection
system DX17
(option)

HEPA
filter

HR012G

Quick change
drill chuck



Dust collection
system DX18
(option)



HEPA
filter

AWS

BL
MOTOR

AFT

AVT

XPT

Maximum drilling efficiency in its class

* In the category of 28 mm-class cordless hammer drills with SDS-plus shank. According to our research as of

Drilling efficiency
increased by about

30%

Compared to our previous
model

- Drill diameter: $\varnothing 16.0$ mm
- Depth: 60 mm
- Concrete with compressive strength of 40 N/mm²

HR011G 130

Our previous model 100

Slow Drilling efficiency Fast

Compact and lightweight
600g lighter than our
previous model



Filter cleaning
Turning the dial removes dust
from the filter and restores dust
collection performance.

Our previous model

* With the dust collection system installed

Photo: HR011G+ DX17

AVT

Anti-Vibration Technology

Low vibration

HR011G


- Hammerdrilling into concrete: 10.5 m/s²
- Hammerdrilling into concrete with DX17: 11.0 m/s²
- Chiselling: 7.3 m/s²

HR012G

- Hammerdrilling into concrete: 10.2 m/s²
- Hammerdrilling into concrete with DX18: 9.1 m/s²
- Chiselling: 6.9 m/s²

According to EN62841-2-6

Minimizing user strain during
continuous operation.

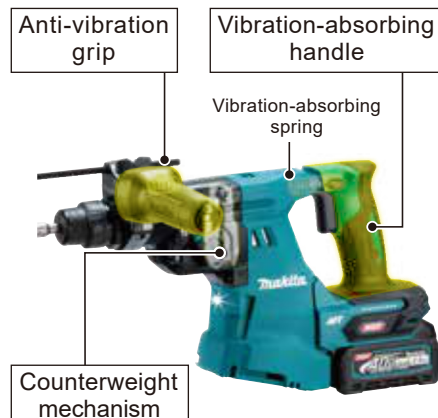


Reduces vibration by counterbalancing piston movement.

AFT

Active Feedback sensing Technology

Turns the motor off if bit rotation is suddenly forced to stop.

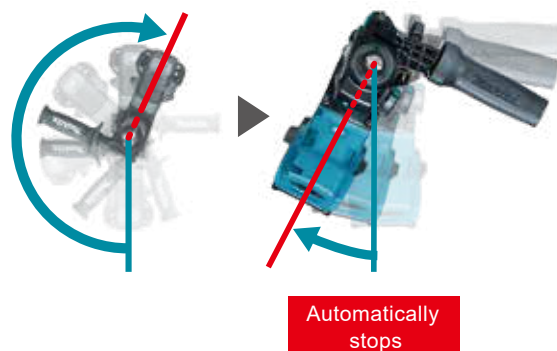

...lling efficiency with excellent maneuverability

ass*

November 2025.

**BL
MOTOR**

High-power brushless motor



XPT

High water-resistance compatible with XPT(eXtreme Protection Technology)

Three operation modes

Rotation with
Hammering



Photo: HR011G
with DX17

Hammering
only



Photo: HR011G
with Dust cup set

Rotation only



Photo: HR012G
with Quick change
drill chuck

Electronic speed switch

From heavy-duty tasks to delicate tasks




Speed indicator	Blows per min: min ⁻¹	Recommended application
4	5,000	Drilling, chiseling and chipping work
3	4,250	Scraping and chiseling work
2	3,250	Reducing breakage and wear when drilling with small-diameter bits
1	1,400	Minimizing edge chipping when drilling into tiles



One-touch attachment
and removal

Dust collection system DX17/DX18

Clean operation with excellent maneuverability

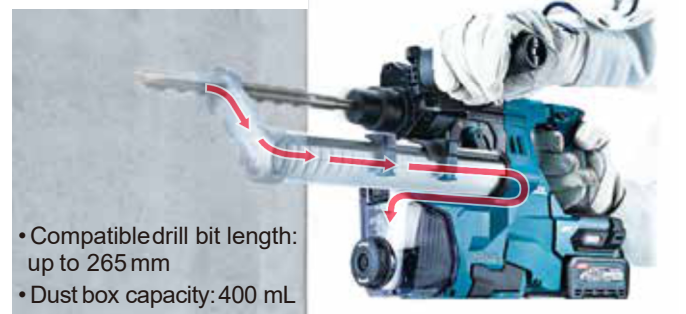

- Compatible drill bit length: up to 265 mm
- Dust box capacity: 400 mL

AWS


Auto-start Wireless System

Connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



New light structure

By adopting a light-guiding structure that directs the tool's LED light to the front of the dust collection system, the need for an LED light and LED circuit within the system is eliminated.

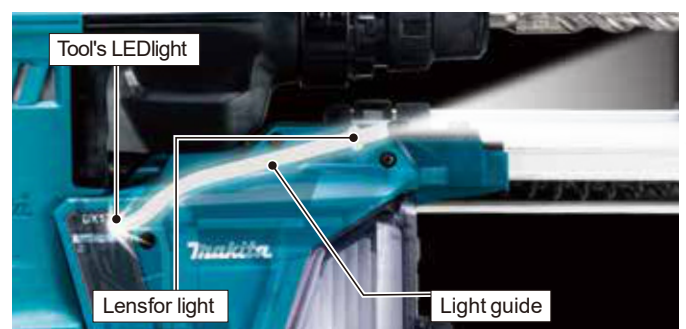

■ Combination Hammer and Rotary Hammer with Dust collection system series

40V max

HR009G+DX11
Capacity: 30mm
Impact energy: 3.9 J

Quick change
drill chuck



40V max

HR007G+DX15
Capacity: 28mm
Impact energy: 3.0 J



40V max

HR008G+DX10
Capacity: 30mm
Impact energy: 3.9 J



40V max

HR010G+DX16
Capacity: 20mm
Impact energy: 2.1 J



■ Optional Accessories

Dust case set

Part No.
1916C0-9
1916C1-7 (For North
American countries only)



HEPA Filter set

Part No.
199596-7

HEPA
filter



Dust cup set
For drilling

Part No.
HR011G: 1914L7-6
HR012G: 1914L8-4



Dust cup set
For hammering

Part No.
HR011G: 1914L9-2
HR012G: 1914M0-7



Tool holder set

HR012G only
Part No.
191F47-2



Keyless drill chuck set

Part No.
194254-0



Hook set

Part No.
191W90-3



Grease vessel set

Part No.
198993-4
194683-7



Wireless unit set

Part No.
199393-1
198901-5
198900-7



Drill chuck set

Part No.
194041-7



■ Charging Time

	Fast Charging DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min
BL4080F/H 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Combination Hammer

HR011G/ HR012G 28 mm (1-1/8") Adapted for SDS-PLUS bits

Brake	Blows per minute	0 - 5,000 min ⁻¹
Reversing	No load speed	0 - 1,130 min ⁻¹
Anti-restart function	Capacity	Concrete (w/ TCT bit): 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Electronic 4-Speed	Impact energy	3.3 J
Adapted for SDS-PLUS bits	Vibration level *	HR011G: 10.5 m/s ² / HR012G: 10.2 m/s ² (Mode: Hammer drilling into concrete) HR011G: 11.0 m/s ² (Mode: Hammer drilling into concrete with DX17) HR012G: 9.1 m/s ² (Mode: Hammer drilling into concrete with DX18) HR011G: 7.3 m/s ² / HR012G: 6.9 m/s ² (Mode: Chiselling)
Torque Limiter	Uncertainty (K) for Vibration *	HR011G: 1.5 m/s ² / HR012G: 1.8 m/s ² (Mode: Hammer drilling into concrete) 1.5 m/s ² (Mode: Chiselling)
Constant Speed	Sound pressure level *	HR011G: 97 dB(A), 98 dB(A) (with DX17) HR012G: 96 dB(A), 98 dB(A) (with DX18)
Dust Collection	Sound power level *	HR011G: 105 dB(A), 105 dB(A) (with DX17) HR012G: 104 dB(A), 106 dB(A) (with DX18)
Built-in Job Light	Uncertainty (K) for Noise *	3 dB(A), 3 dB(A) (with DX17/ DX18)
Carrying Case	Dimensions (L x W x H)	HR011G: 391 x 104 x 223 mm (15-3/8 x 4-1/8 x 8-3/4") HR012G: 419 x 104 x 223 mm (16-1/2 x 4-1/8 x 8-3/4") (BL4040/BL4040F) (Battery) Net weight HR011G: 3.8 - 5.5 kg (8.4 - 12.1 lbs.) / HR012G: 4.0 - 5.4 kg (8.8 - 11.9 lbs.) (Battery) BL4020 - BL4080F

Standard Equipment :

HR012GZ: Drill chuck: 191F46-4(1), Grease vessel: 194683-7(1),
Depth gauge: 331886-4(1)

HR012GM202: Drill chuck: 191F46-4(1), Grease vessel: 194683-7(1), Depth gauge: 331886-4(1),
Connector plastic case (type 4): 821552-6(1), INNER TRAY: 836491-7(1), Battery BL4040: 191B31-3(2),
Sealing cap: 422784-4(5), FAST CHARGER: DC40RA(1)

HR012GM201: Drill chuck: 191F46-4(1), Grease vessel: 194683-7(1), Depth gauge: 331886-4(1),
Connector plastic case (type 4): 821552-6(1), INNER TRAY: 836491-7(1), Battery BL4040: 191B31-3(2),
FAST CHARGER: DC40RA(1)



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in