



Cordless LED Flashlight DML806

Satisfy Professional's Needs

18V
LITHIUM-ION

14.4V
LITHIUM-ION


LXT
LITHIUM-ION

360 degrees illumination



Three-stage brightness switch

3-stage brightness switch

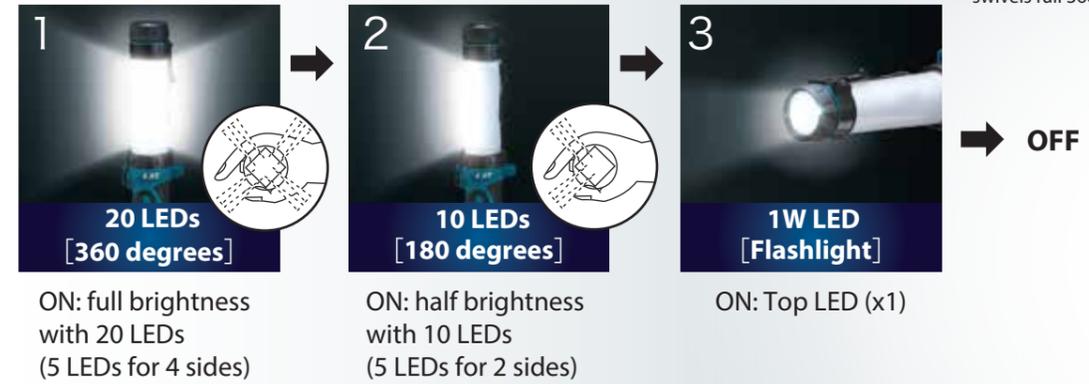

Light diffusing plastic (color: milky white)



1W LED on the top with light-diffusing reflector and transparent lens



Convenient metal hook
• can be retracted and stored behind the light head.
• swivels full 360 degrees



Cordless LED Flashlight

DML806 18V, 14.4V	
Continuous use (hours)	Main : 20LEDs-11.0(5.0Ah-18V)/6.5(4.0Ah-14.4V), 10LEDs-21(5.0Ah-18V)/12.5(4.0Ah-14.4V), Sub : 1 X 1W LED -59.0(5.0Ah-18V)/38.0(4.0Ah-14.4V)
Dimensions (L x W x H)	365x78x119mm (BL1830) 14-3/8"x3-1/16"x4-11/16"
Net weight*	0.69kg (1.5lbs) (BL1415N)

Battery and charger are sold separately. *weight according to EPTA-Procedure 01/2003
Items of standard equipment and specifications may vary by country or area.

Light source		
Type	Illuminance (lx)*	Luminous flux (lm)
20 LEDs	310	620
10 LEDs	280	310
1W LED	2,100	90

*Measured in the center point of an illuminated field; 50cm from the light source

Continuous use

	BL1815N	BL1820	BL1830	BL1840	BL1850	BL1415N	BL1430	BL1440
20 LEDs	3.0h	4.0h	6.0h	8.5h	11.0h	2.5h	4.0h	6.5h
10 LEDs	6.0h	8.5h	11.5h	16.5h	21.0h	4.5h	8.0h	12.5h
1W LED	17.0h	23.0h	33.0h	46.0h	59.0h	14.5h	24.0h	38.0h
Charging time	15min	24min	22min	36min	45min	15min	22min	36min

DC18RC



Makita Power Tools India Pvt. Ltd.
Unit II, Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067

Email: info@makita.in
Website: www.makita.in