

■ Accessories / Optional

EFFICUT T.C.T. saw blade

EFFICUT
125 mm x 25T
Part No. E-28880
125 mm x 45T
Part No. B-69462



Guide rule

(with screw M5 x 20)
Part No. 1918P3-6




Dust nozzle set

Part No. 194202-9



Guide rail adapter

Part No. 191L92-3



Guide rail



Overall length (m)	Part No.
1.0	199140-0
1.4	194368-5
1.5	199141-8
1.9	194925-9
3.0	194367-7




Repair parts for guide rail



Item	Part No.
1 Seat 10m set (For upper plastic tape repair)	194416-0
Position Seat 1.4 m	194418-6
2 Position Seat 3.0 m	194419-4
3 Rubber Seat 10 m set (For lower rubber tape repair)	194417-8

Clamp set

(Use with Guide rail)

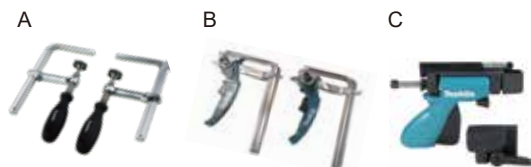


Type	Part No.
A: Standard	194385-5
B: Ratchet	199826-6
C: Push clamp	1913K5-7



Guide rail connector set

2pcs set

The Parallel guide cannot be used with the Limit stop



Part No.
198885-7

■ Charging Time

	Fast Charging DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min

*1 Recommended battery

Cordless Circular Saw

HS014GZ 125 mm (4-7/8")

⊘ Brake	Wheel diameter	125 mm (4-7/8")
⊘ Anti-restart function	No load speed	6,400 min ⁻¹
⊘ Soft Start	Bevel range	Left: 15° - Right: 45°
⊘ Dust Collection	Max cutting capacity	0°: 47 mm (1-7/8")
⊘ Built-in Job Light		45° right: 30 mm (1-3/16")
		15° left: 20 mm (13/16")
	Vibration level	1.0 m/s ² (EN62841-2-5, Mode: Cutting wood)
	Uncertainty (K) for Vibration	1.5 m/s ² (EN62841-2-5, Mode: Cutting wood)
	Sound pressure level	94 dB(A) (EN62841-2-5)
	Sound power level	102 dB(A) (EN62841-2-5)
	Uncertainty (K) for Noise	3 dB(A) (EN62841-2-5)
	Dimensions (L x W x H) (Battery)	264 x 203 x 246 mm (10-3/8 x 8 x 9-11/16") (BL4040F)
	Net weight (Battery)	3.3 kg (7.3 lbs.) (BL4040F)

Standard Equipment : Dust nozzle set 194202-9(1), Hex. wrench 5 783217-7(1), TCT SAW EFFI 125X25T E-28880(1)



Cordless Circular Saw
HS014G 125mm (4-7/8")



Max. cutting depth

47 mm

No load speed

6,400 min⁻¹

47mm

**Capable of
flush cutting**

Max cutting depth

15° left: **20 mm**

High speed cutting

BL MOTOR




Equipped with an XGT battery, BL motor, and EFFICUT blade, this tool delivers unparalleled power and efficiency.

EFFICUT

ADT Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

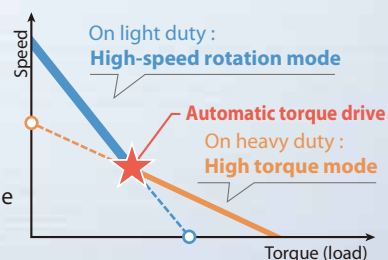

Work amount

257 cuts*


*1 Test material: Merapi t45mm x 300mm
Bevel angle: 0° cross cutting
Battery: BL4040F on a full battery charge
*Productivity and output vary significantly depending on the hardness of the workpiece and the cutting tool used.

Compatible with Guide rail

For use with Guide rail, the shape of base is designed to install Guide rail adapter.


AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

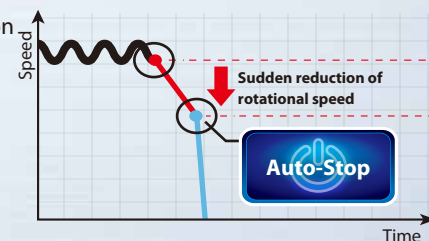

Flush cutting capability

(Sub base can be removed without tool)

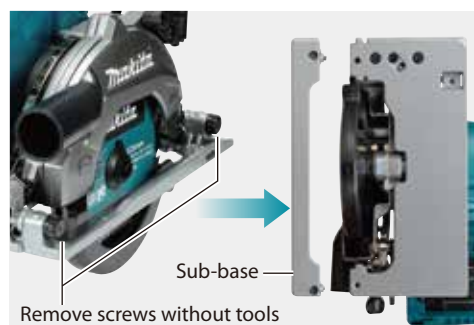


Remove the sub-base
when making flush cuts.



Hook (Tool hanger)



Blower function & LED Job light
LED Job light with preglow and afterglow functions

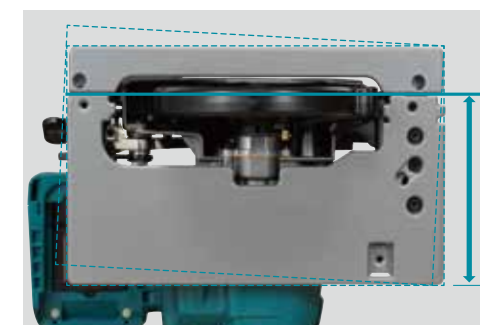

Supports fine-tuning
of the parallelism between the base side and the saw blade



Safety cover open lever
When it is necessary to raise the safety cover, such as for flush cutting, the cover can be opened by manual operation using the lever.



One-touch depth adjustment
is available with the depth scale and lock lever.



Auto-start Wireless System
Connects to a compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



High water-resistance compatible with XPT² (eXtreme Protection Technology)
²XPT is designed to help protect against dust and water ingress, but complete protection is not guaranteed.

Safety cover open lever