


Comparison of Efficiency

Note:

1. The test results depend to a great extent on the hardness of the material, etc.
2. Numbers in the charts below are relative values when the capacities of Competitor "H" model are indexed at 100.
3. Chipped concrete in vertical down application using $\phi 1.5\text{mm}^2$ x 50m cord reel, and measured the amount of concrete removed.

Test material: Concrete with compressive strength of 40N/mm^2

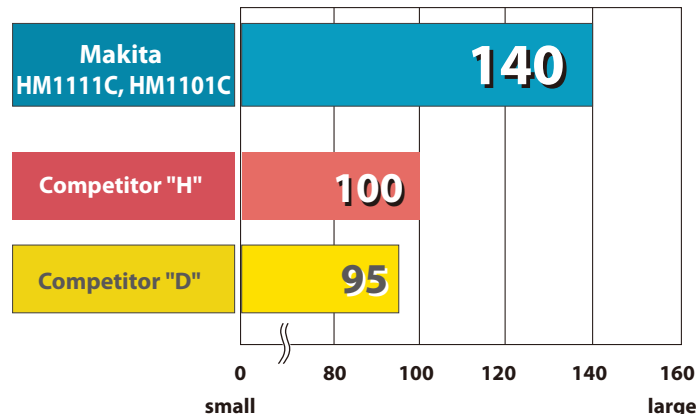

Accessories

Bull point (For demolishing concrete)		
Length(mm)	Part No.	
280	A-80787	
400	A-80793	
600	A-87476	

Self-Sharpener Bull Point		
Length(mm)	Part No.	
400	B-10621	

Cold chisel (For chipping, edging, channeling and breaking away larger chunks of concrete)		
Size(mm)	Part No.	
25 x 280	A-80802	
25 x 400	A-80818	
24 x 600	A-87482	

Scaling chisel (A wide chisel for chipping away scale of dried concrete spatter)		
Size(mm)	Part No.	
50 x 400	A-80824	

Scaling chisel (for Tile) These items are available on request. Contact us for the minimum order quantity.		
Size(mm)	Part No.	
50 x 300	A-80830	

Clay spade		
Size(mm)	Part No.	
105 x 400	A-17653	

Bushings tool (For concrete surface removal) Use with shank (A-19897)		
Size(mm)	Part No.	
67 x 67	A-19881	

Rammer (For tamping) Use with shank (A-19897)		
Dia. (mm)	Part No.	
140	A-19875	

Grease vessel set 100ml (for bit)		
Part No.		
194683-7		

Side handle assembly (Grip assembly)		
Type	Part No.	
D shaped	134890-0	
Bar style	135413-7	



Demolition Hammer HM1111C / HM1101C Adapted for SDS-MAX bits

Double Insulation Variable Speed Constant Speed Soft Start Adapted for SDS-MAX bits Carrying Case	Photo: HM1111C	Continuous rating Input Impacts per minute (ipm) Dimensions (L x W x H) Net weight* Power supply cord	HM1111C 1,300W 1,100-2,650 528 x 126 x 247mm (20-3/4" x 5" x 9-3/4") 8.0kg (17.7lbs) 5.0m (16.4ft)	HM1101C 1,300W 1,100-2,650 528 x 115 x 247mm (20-3/4" x 4-1/2" x 9-3/4") 7.3kg (16.2lbs) 5.0m (16.4ft)
	Photo: HM1101C	Standard Equipment	HM1111C: Plastic case complete:140562-7(1), Grease vessel: 194683-7(1), BULL POINT FOR SDS-MAX 300: D-34176(1)	

Makita Makita Power Tools India Pvt. Ltd.
Unit II, Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067

Email: info@makita.in
Website: www.makita.in



Demolition Hammer HM1111C/ HM1101C

Satisfy Professional's Needs



Adapted for
SDS-MAX bits

ALWAYS low Vibration

Anti Vibration Technology and
Suppression of motor speed
during no-load
(HM1111C only)

**AVT & SOFT
NO LOAD**
ANTI VIBRATION TECHNOLOGY

HM1111C only

Photo: HM1111C

Dominate the Job Site


with Makita's Low Vibration Demolition Hammer

Under load


Anti Vibration Technology (HM1111C only)



A Active dynamic vibration absorber
ensures operation with extremely low vibration.
allows tool design with flat body sides for better handling.

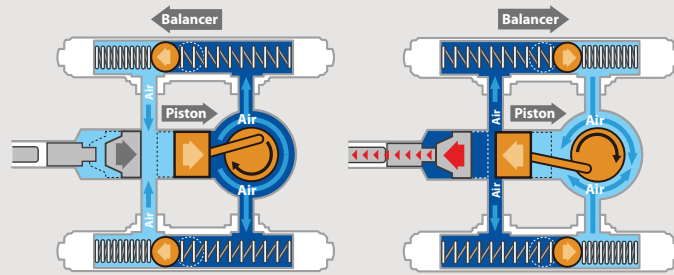

B Vibration Absorbing Grip
Spring loaded hinged grip
absorbs vibration.



AVT
ANTI VIBRATION TECHNOLOGY

ALWAYS
low Vibration


During no-load

SOFT
NO LOAD

Suppression of motor speed

- reduces vibration of tool body when idling, accordingly decreases the amount of vibration to operator's hands during a day's operation.
- minimizes deflection of bit tip from aiming point when starting chipping.

(HM1111C only)

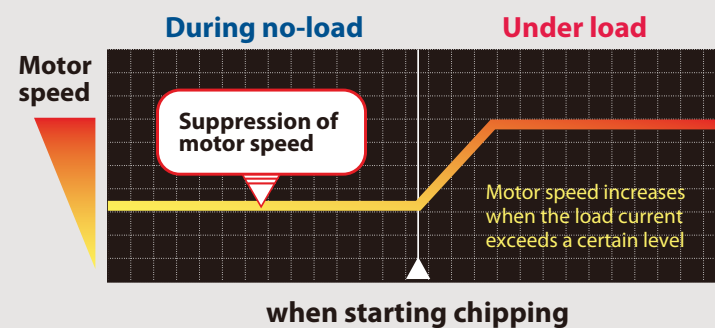

High performance and durability

Easy-to-hold barrel design



Adapted for SDS-MAX bits

Easy-to-operate slide switch

Rubberized soft grip
provides more comfort and control.



12 bit angle settings


One-touch sliding chuck
for easy bit changes

Long size carbon brush
for extended service life

D-shaped side handle
swivels 360° to your desired position.
8 different settings (back and forth).

Photo : HM1111C

Class & Impact energy

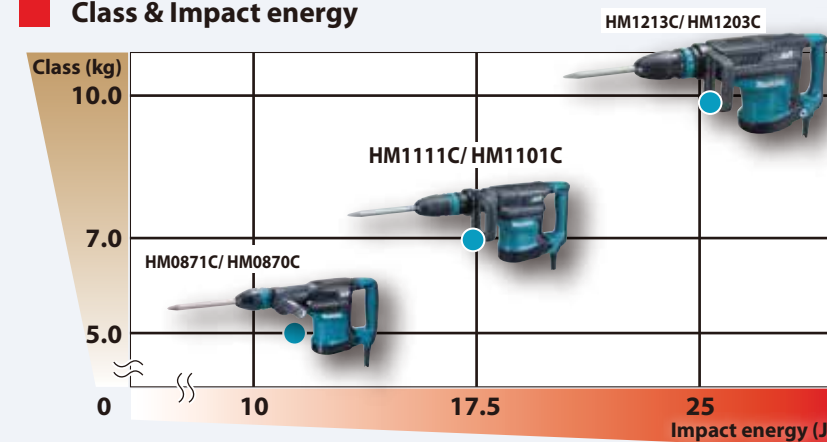

Electronic with ;

- Variable speed control by dial
- LED service light that indicates when to replace carbon brush
- LED power light that indicates trouble with the electric circuit
- Soft start for suppressing start-up reaction
- Constant speed control

